



4040977 4040978 4040980 4040981 4040982  
4040995 4040996 4040998 4040999 4041000  
4049051 4049053 4049061 4049069 4049182  
4049184 4049192 4049200 4148053 4148055  
4148059 4148060 4148061 4148063 4156845  
4161275 4165142 4165306 4165386 4165525  
4165979 4166252 4166313

**Disconnect from mains supply before replacing the fuse or the lamp.**  
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
Koppla bort spänningen före byte av en säkring eller en lampa.



**Switch Off**  
Abschalten  
**Débrancher**  
Desconectar  
**Uitschakelen**  
Stäng av

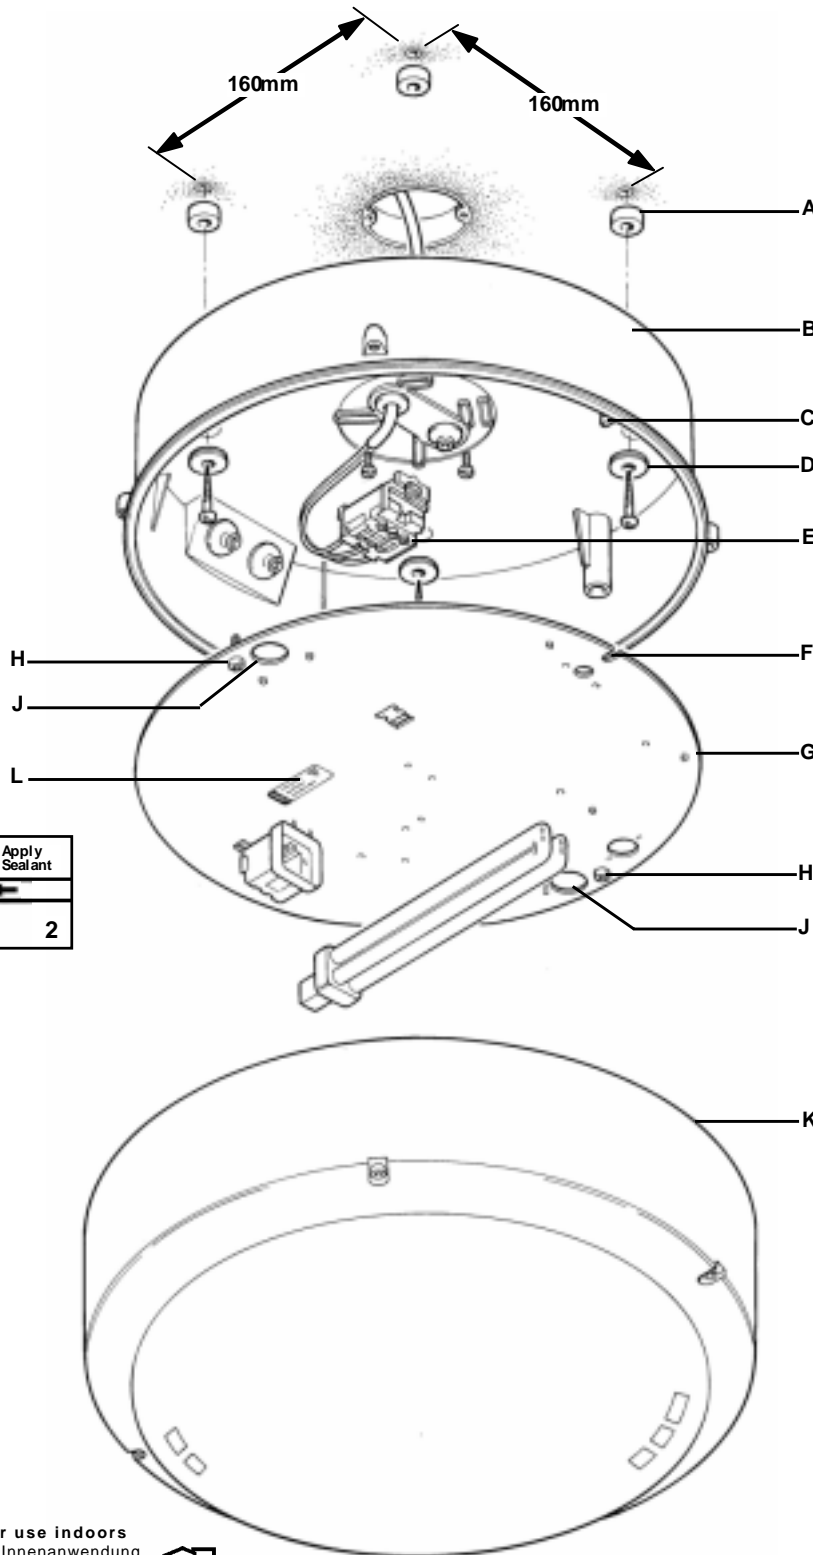

Checklist:

Surface Types:  
4 x Grommets  
4 x Seal washers  
1 x Conduit Box Gasket  
2 x Silicone Sleeving

Light Halo Types:  
4 x Nylon Spacers  
4 x Grommets  
4 x Seal Washers  
2 x Silicone Sleeving

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off mains electrical supply before commencing installation.

**Installation Procedure**

Remove trim/diffuser assembly (K) from housing (B).

NOTE: Partially undo each screw in turn, repeat procedure until all screws are free.

Check rating marked on label (L) conforms with mains electrical supply.

Unscrew gear plate fixing screws (H), insert fingers in holes (J) and pull gear plate from housing (B).

Drill 5mm clearance holes in housing for outrigger and M4 clearance holes for conduit box screws.

Prepare suitable fixings in mounting surface for outrigger screws.

NOTE: Housing (B) is marked 'TOP' for wall mounting.

Place a grommet and feed supply cable into housing as Fig.1.

Surface Types:  
Secure housing (B) to conduit box, if applicable, using M4 screws. Use suitable screws with supplied seal washers (D) for outrigger fixing.

Light Halo Types:  
Place housing (B) with spacers (A) in position and secure using suitable screws with supplied seal washers.  
NOTE: Sealing face of washer to face housing.

Cover supply leads with silicone sleeving and connect leads in respectively marked terminals in terminal block (E).

Push cable back into grommet as Fig.2.

Align gear plate cut-out (F) with housing rib (C), push gear plate in position and tighten fixing screws (H).

Fit appropriate lamp as indicated on label (L).

Secure trim/diffuser assembly (K) to housing (B).

Fig. 1

Apply Sealant

7mm  
10mm

Fig. 2

WARNING: To ensure IP65 rating, waterproof silicon adhesive must be applied around all grommet cable entries and under heads of fixing screws.

< Millimetres >



03.08

Suitable for use indoors  
Geeignet für Innenanwendung  
Pour un usage interne  
Adecuada para uso en interiores  
Geschikt voor gebruik binnen  
Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

**Ce symbole indique que vous devez remplacer tout verre de protection fêlé.**

Este simbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

**Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.**

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

**Concord**