



4163038 4164297 4043630 4043631 4049230
4049232 4049235 4049239 4165015 4165057

Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

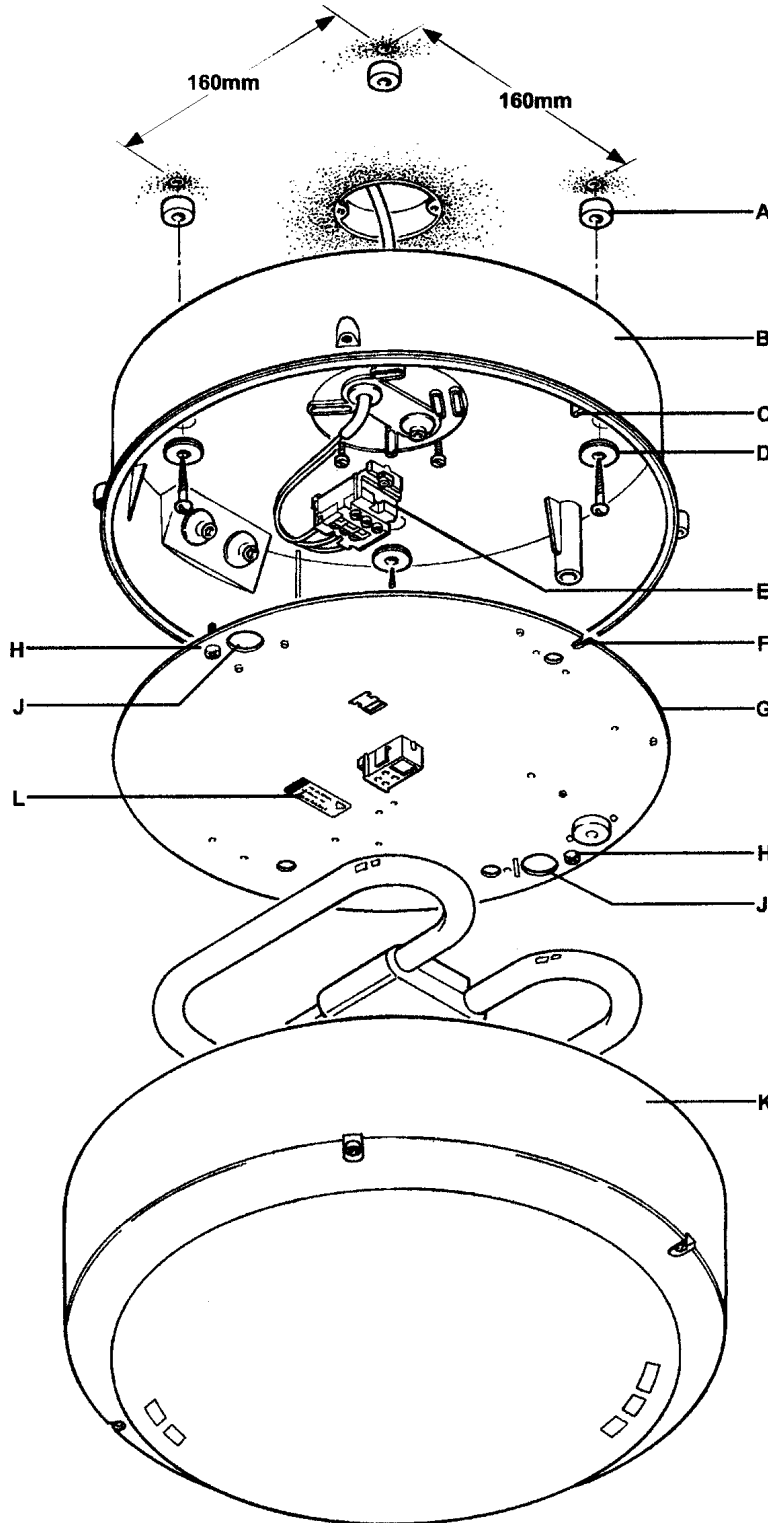

Checklist

Surface Types

- 4 x Grommets
- 4 x Seal Washers
- 1 x Conduit Box Gasket
- 2 x Silicone Sleeving

Checklist

Light Halo Types

- 4 x Nylon Washers
- 4 x Grommets
- 4 x Seal Washers
- 2 x Silicone Sleeving

Installation Procedure

Remove trim/diffuser assembly (K) from housing (B).
NOTE: Partially undo each screw in turn, repeat procedure until all screws are free.

Check rating marked on label (L) conforms with mains electrical supply.

Unscrew gear plate fixing screws (H). Insert fingers in holes (J) and pull gear plate from housing (B).

Drill 5mm clearance holes in housing for outrigger and M4 clearance holes for conduit box screws.

Prepare suitable fixings in mounting surface for outrigger holes.
NOTE: Housing is marked 'TOP' for wall mounting.

Pierce a grommet and push cable into housing (Fig. 1).

Surface Types

Secure housing (B) to conduit box if applicable using M4 screws. Use suitable screws with supplied seal washers (D) for outrigger fixing.

Light Halo Types

Place housing (B) with spacers (A) in position and secure using suitable screws with supplied seal washers (D).
NOTE: Sealing face of washer to face housing.



Cover supply leads with supplied silicone sleeving and connect leads in respectively marked terminals in terminal block (E).

Push cable back into grommet (Fig. 2).

Align gear plate cut-out (F) with housing rib (C), push gear plate in position and tighten fixing screws (H).

Fit appropriate lamp as indicated on label (L).

Secure trim/diffuser assembly (K) to housing (B).



WARNING: To ensure IP65 rating, waterproof silicon adhesive must be applied around all grommet cable entries and under heads of fixing screws.

Suitable for use indoors

Geeignet für Innenanwendung

Pour un usage interne

Adecuada para uso en interiores

Geschikt voor gebruik binnen

Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbole indique que vous devez remplacer tout verre de protection fêlé.

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetsglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasiasa vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product
MUST be recycled.



03.08

Concord

Avis Way Newhaven East Sussex BN9 0ED
T 0870 606 2030 F 01273 512 688 email: information@concordmartin.com

