



Less maintenance, more performance

START Downlight IP44




Introducing the new START Downlight IP44 range, designed as an ideal replacement for CFL luminaires ranging from 150mm to 225mm cut outs. With an IP44 rating from the front of the fixture, the range is perfect for applications such as corridors, bathrooms, receptions and back of house areas.

The START Downlight delivers impressive performance with efficacy up to 100lm/w

(175mm, 4000K version) and high lumen output of up to 2325lm (225mm, 4000K version). With a 50,000 hour lifetime and 5 year warranty the START Downlight IP44 comes with the benefit of less maintenance. Additionally, the inclusion of a loop-in and loop-out facility and recess depth of less than 65mm provides a simple yet effective solution.

START Downlight IP44

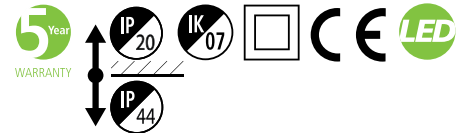

Features

- A range of LED Downlights perfect for perfect for corridors, bathrooms, receptions and back of house areas
- High efficacy of up to 100lm/w
- High lumen packages of up to 2325lm for 225mm cut outs
- IP44 rating allows for installation in applicable wet zone areas
- Push dim DALI and 1-10V options available
- Shallow recess depth of < 65mm
- Can replace existing CFL downlights using 150, 175, 205 & 225mm ceiling cut outs
- 3 hour emergency pack available
- Loop in- Loop out facility with push fit terminal block for quick wiring
- White bezel (RAL9003)
- Available in Warm White (3000K) and Neutral White (4000K)
- Energy class: A++, A+, A
- Lifetime of 50,000 hours at L70


Product information

Code	Description	Cut Out	Correlated Colour Temperature (K)	Total Power Consumption (W)	Fixture Lumen (lm)	Luminaire Efficacy (lm/W)	Nominal Average Life (hours)
START Downlight IP44							
0030324	START Downlight 150 IP44 1100lm 830	150	3000	12	1100	92	50,000
0030325	START Downlight 150 IP44 1175lm 840	150	4000	12	1175	98	50,000
0030326	START Downlight 175 IP44 1425lm 830	175	3000	15	1425	95	50,000
0030327	START Downlight 175 IP44 1525lm 840	175	4000	15	1525	102	50,000
0030328	START Downlight 205 IP44 1950lm 830	205	3000	21	1950	93	50,000
0030329	START Downlight 205 IP44 2025lm 840	205	4000	21	2025	96	50,000
0030330	START Downlight 225 IP44 2275lm 830	225	3000	24	2275	95	50,000
0030331	START Downlight 225 IP44 2325lm 840	225	4000	24	2325	97	50,000

Accessory

Code	Description
2691958	165~240 EMG PACK

Photometric Data

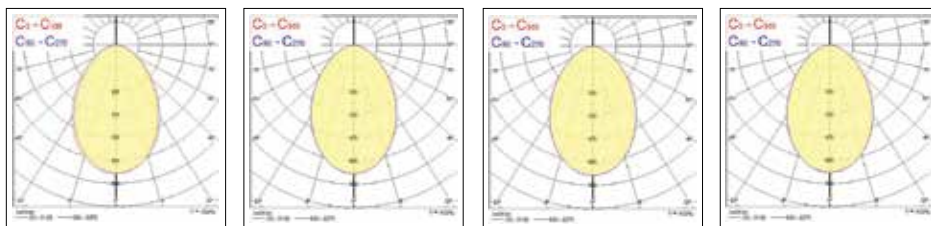


START Downlight 150 IP44 1100lm 830

START Downlight 175 IP44 1425lm 830

START Downlight 205 IP44 1950lm 830

START Downlight 225 IP44 2275lm 830

Dimensions (mm)

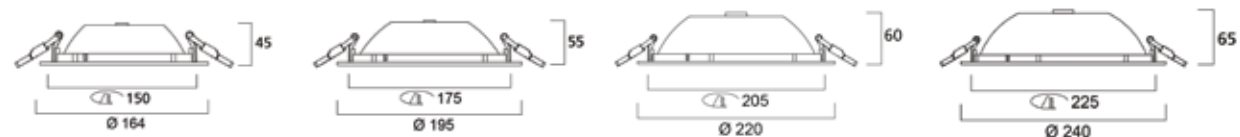

Additional Images



START Downlight IP44 Front & Side



START Downlight IP44 Side



START Downlight IP44 Front



START Downlight IP44 Back



sylvania-lighting.com

A Feilo Sylvania Company

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited. Copyright Feilo Sylvania Europe Limited October 2018

T: F:
Email: