




Robust design, perfect function

START Surface IP66



START Surface IP66 is a new range of surface mounted fixtures developed for residential and commercial entrance ways and corridors. With an IP66 rating and available in a Sensor Dim version, which enables additional energy savings, these fixtures are perfect for interior and exterior applications.

START Surface IP66



START Surface IP66 benefits from a robust design that meets IK10 requirements. The range comes in 2 different colour temperatures (3000K & 4000K) and delivers up to 1000lm (4000K version) with efficiency up to 91lm/W (4000K version)

Features

- A range of LED surface mounted, vandal resistant fixtures perfect for interior and exterior applications including residential and commercial entrance ways and corridors
- Robust design meets IK10 requirements
- Available in Standard and Sensor-dimming versions
- Sensor dimming version provides a wide range of settings (including Corridor function) for optimisation of daylight and power consumption
- High performance: delivers up to 1000lm (4000K version), and up to 91lm/W (total system efficiency)
- Available in Warm White (3000K) and Neutral White (4000K)
- Energy class: A++, A+, A
- Lifetime: 50,000 hours at 70% of the original output (L70)
- Eyelid accessory available
- Available in Black or White

Product information


Code	Description	Grid Size (mm)	Body Colour	Colour Temperature (K)	Voltage (V)	Drive Current (mA)	Total System Power Consumption (W)	Lumen Output (lm)	Efficiency (lm/W)	Lifetime (Hours)
START Surface IP66										
0049284	START Surface IP66 960lm 830 IK10 BLK	300	Black	3000	220-240	350	11	960	87	50,000
0049285	START Surface IP66 1000lm 840 IK10 BLK	300	Black	4000	220-240	350	11	1000	91	50,000
0049286	START Surface IP66 960lm 830 IK10 WHT	300	White	3000	220-240	350	11	960	87	50,000
0049287	START Surface IP66 1000lm 840 IK10 WHT	300	White	4000	220-240	350	11	1000	91	50,000
0049288	START Surface IP66 MW 960lm 830 IK10 SensorDim BLK	300	Black	3000	220-240	350	11	960	87	50,000
0049289	START Surface IP66 MW 1000lm 840 IK10 SensorDim BLK	300	Black	4000	220-240	350	11	1000	91	50,000
0049290	START Surface IP66 MW 960lm 830 IK10 SensorDim WHT	300	White	3000	220-240	350	11	960	87	50,000
0049291	START Surface IP66 MW 1000lm 840 IK10 SensorDim WHT	300	White	4000	220-240	350	11	1000	91	50,000

Accessories

Code	Description	Grid Size (mm)	Body Colour
0049342	START Surface IP66 Eyelid BLK	300	Black
0049343	START Surface IP66 Eyelid WHT	300	White




Dimensions (mm)

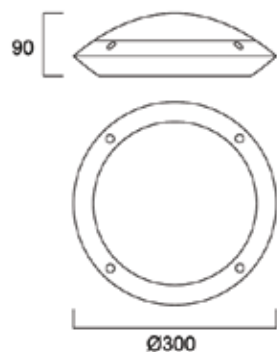


Photometric Data

START Surface IP66 960lm 3K

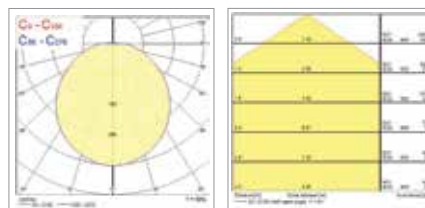

START Surface IP66 1000lm 4K

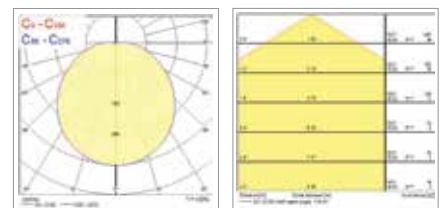

sylvania-lighting.com

A Feilo Sylvania Company

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited. Copyright Feilo Sylvania Europe Limited September 2018

T: F:
Email: