



Clear Globe, Square Sphere and Sphereline series  
1201 W3  
1202 W3  
1203 W3  
1212 W3  
8031 W3  
8032 W3

**Disconnect from mains supply before replacing the fuse or the lamp.**  
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
Koppla bort spänningen före byte av en säkring eller en lampa.



**Switch Off**  
Abschalten  
**Débrancher**  
Desconectar  
**Uitschakelen**  
Stäng av

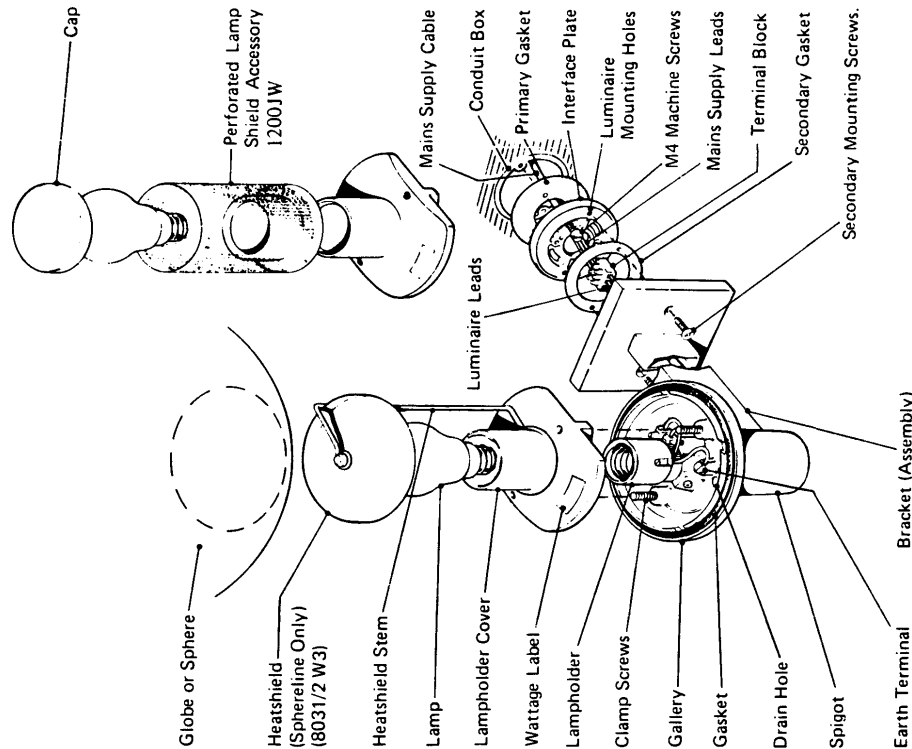

Switch off the mains electrical supply.  
Unscrew the two clamp screws in the gallery and remove the lampholder cover.  
Push out the skin across the drain hole, which is marked on the inside of the gallery, using a suitable tool.

Offer the primary gasket and interface plate to the mounting surface and pass the mains supply cable through their central holes. With the luminaire mounting holes horizontal attach the interface plate to the conduit box using M4 machine screws.

With the secondary gasket retained by the two secondary mounting screws offer the bracket assembly to the mounting surface and connect the mains supply leads to the luminaire leads (brown – live, blue – neutral and green/yellow – earth) using a suitable terminal block.

Fix the bracket assembly to the interface plate by means of the secondary mounting screws. Check that the spigot of the bracket assembly is vertical, if not adjust the interface plate accordingly.

On Square Sphere series luminaires (1201/2/3 W3) if a perforated lamp shield accessory (1200JW) is to be fitted push it fully home onto the lampholder cover.

Fit the lampholder cover to the bracket assembly but leave the clamp screws sufficiently loose to allow the globe or sphere, as appropriate, to be located under the lampholder cover. On Sphereline series luminaires (8031/2 W3), which have a heat shield, ensure the stem of the heat shield is towards the mounting surface.

Fit the appropriate lamp as indicated by the label on the lampholder cover.

Alternatively an SL18 lamp may be used for energy conservation.

On Square Sphere series luminaires (1201/2/3 W3) if a perforated lamp shield accessory (1200JW) is fitted push the cap onto the top of the lamp shield.

Pass the globe or sphere, as appropriate, over the lampholder cover and ensure it is concentrically seated on the gasket in the gallery of the bracket assembly. Tighten the clamp screws to secure the sphere or globe in position.

**WARNING:**

**DO NOT EXCEED THE LAMP WATTAGE MARKED ON THE LAMPHOLDER COVER FOR THE APPROPRIATE SPHERE OR GLOBE.**

**DO NOT USE SQUARE SPHERE SERIES LUMINAIRES (1201/2/3 W3) WITHOUT THE CAP ON TOP OF THE PERFORATED DIFFUSER ACCESSORY (1200JW) IF FITTED.**

**DO NOT USE SPHERELINE SERIES LUMINAIRES (8031/2 W3) WITHOUT THE HEATSHIELD FITTED UNLESS USING AN 18W SL LAMP.**



**Replace any cracked protective shield.**

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

**Ce symbol indique que vous devez remplacer tout verre de protection fêlé.**

Este simbolo indica que hay que 'reemplazar filtros en caso de rotura o desperfectos'.

**Dette symbolet indikerer at alle odelagte (sprukne) sikkerhetglass må skiftes.**

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen valaisimen käyttöön ottoa.

**Suitable for use indoors**  
Geeignet für Innenanwendung  
**Pour un usage interne**  
Adecuada para uso en interiores  
**Geschikt voor gebruik binnen**  
Lämpligt för inomhusbruk



This Electrical Product  
MUST be recycled.



08.06

< Millimetres >