


Clear Globe, Square Sphere and Sphereline series
1201 L3
1202 L3
1203 L3
1212 L3
8031 L3
8032 L3

Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

Switch off the mains electrical supply.

Unscrew the two clamp screws in the gallery and remove the lampholder cover.

Push out the skin across the drain hole, which is marked on the inside of the gallery, using a suitable tool.

Offer the plinth assembly to the mounting surface and pass the mains supply cable through the gland inside the plinth. Tighten the gland just sufficiently to seal onto the cable.

Fix the plinth assembly to the mounting surface after pulling any slack cable through the gland if necessary.

Connect the mains supply leads to the terminal block and earth terminal provided in the gallery (brown – live, blue – neutral and green/yellow – earth).


On Sphereline series luminaires (8031/2 L3) slide the heatshield onto the lampholder cover such that its ring is seated at the base of the funnel.

Fit the lampholder cover to the plinth assembly but leave the clamp screws sufficiently loose to allow the sphere or globe, as appropriate, to be located under the lampholder cover. On Sphereline series luminaires (8031/2 L3), which have a heatshield, the stem of the heat shield can be adjusted to a preferred position.

Fit the appropriate lamp as indicated by the label on the lampholder cover. Alternatively an SL18 lamp may be used for energy conservation.

Pass the globe or sphere, as appropriate, over the lampholder cover and ensure it is concentrically seated on the gasket in the gallery. Tighten the clamp screws to secure the globe or sphere in position.

Globe or Sphere ———

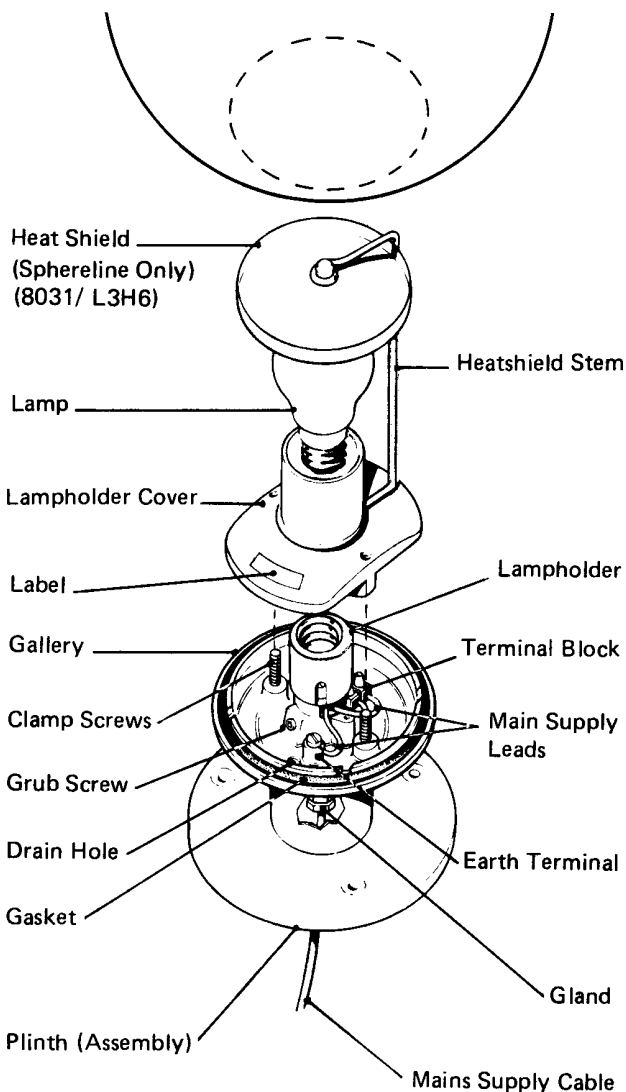

WARNING:

DO NOT EXCEED THE LAMP WATTAGE MARKED ON THE LAMPHOLDER COVER FOR THE APPROPRIATE GLOBE OR SPHERE.

DO NOT USE SPHERE LINE SERIES LUMINAIRES (8031/2 L3) WITHOUT THE HEATSHIELD FITTED UNLESS USING AN 18W SL LAMP.



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbole indique que vous devez remplacer tout verre de protection fêlé.

Este simbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Detta symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta el saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

Suitable for use indoors
Geeignet für Innenanwendung
Pour un usage interne
Adecuada para uso en interiores
Geschikt voor gebruik binnen
Lämplig för inomhusbruk



This Electrical Product
MUST be recycled.



< Millimetres >

Concord:marlin

Avis Way Newhaven East Sussex BN9 0ED
T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com



© Concord Lighting Ltd.