


**Disconnect from mains supply before replacing the fuse or the lamp.**  
**Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.**  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
**Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.**  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
**Koppla bort spänningen före byte av en säkring eller en lampa.**



**Switch Off**  
**Abschalten**  
**Débrancher**  
**Desconectar**  
**Uitschakelen**  
**Stäng av**

These luminaires are designed for interior use and may be mounted on normally combustible surfaces. They require a ceiling aperture of 168mm diameter. The recessed depth required varies according to the projection as shown in Fig. 1.

This luminaire should be installed by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off mains electrical supply before commencing installation.

### Installation Procedure

Switch off mains electrical supply.

Rotate the springs clear of the top of the retaining brackets and tap the brackets fully into opposite locations on the side of the ceiling trim as shown in Fig. 2.

The gantry assembly, as supplied and shown in Fig. 5, is suitable for projections up to 100mm. For greater projections, it is necessary to rearrange the gantry assembly as shown in Fig. 4, (i.e. invert the gantry retaining screws and spring nuts).

Remove the screws from the ceiling trim and use these to attach the gantry assembly to the trim. Adjust the gantry assembly to give the required drum projection and tighten the clamp screws.

Turn the springs to position the dimples uppermost and pass the trim/gantry assembly into the ceiling aperture, deflecting the springs as required to enable the flange to be brought into contact with the ceiling, as shown in Fig. 3. Turn the springs to bring the dimples to bear on the rear of the ceiling, as shown in Fig. 5.

Connect the leads of the flexible cable to the corresponding terminals of a remote mains supply junction box. Multigroove and Dark Cone versions to be used with 70W SON reflector lamps and should be connected to a remote ballast box 00BS71 in accordance with the instructions supplied with it.





Pass the drum assembly through the ceiling trim and engage its keyhole slots on the retaining screws and tighten them.

Fit the appropriate lamp as indicated on the luminaire label.

**WARNING:** This luminaire must be earthed.

**NOTE:** This luminaire should be cleaned using warm soapy water and a soft cloth. Ensure that the luminaire is switched off during cleaning.

Dispose of lamps in accordance with manufacturer's instructions.

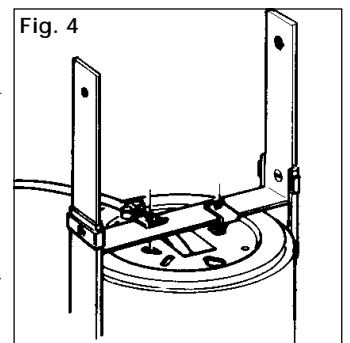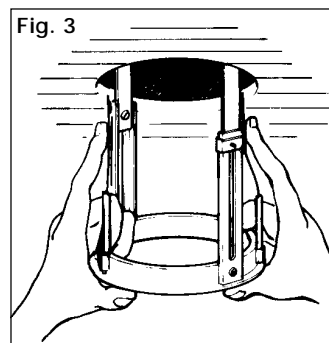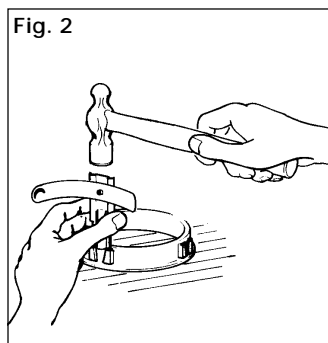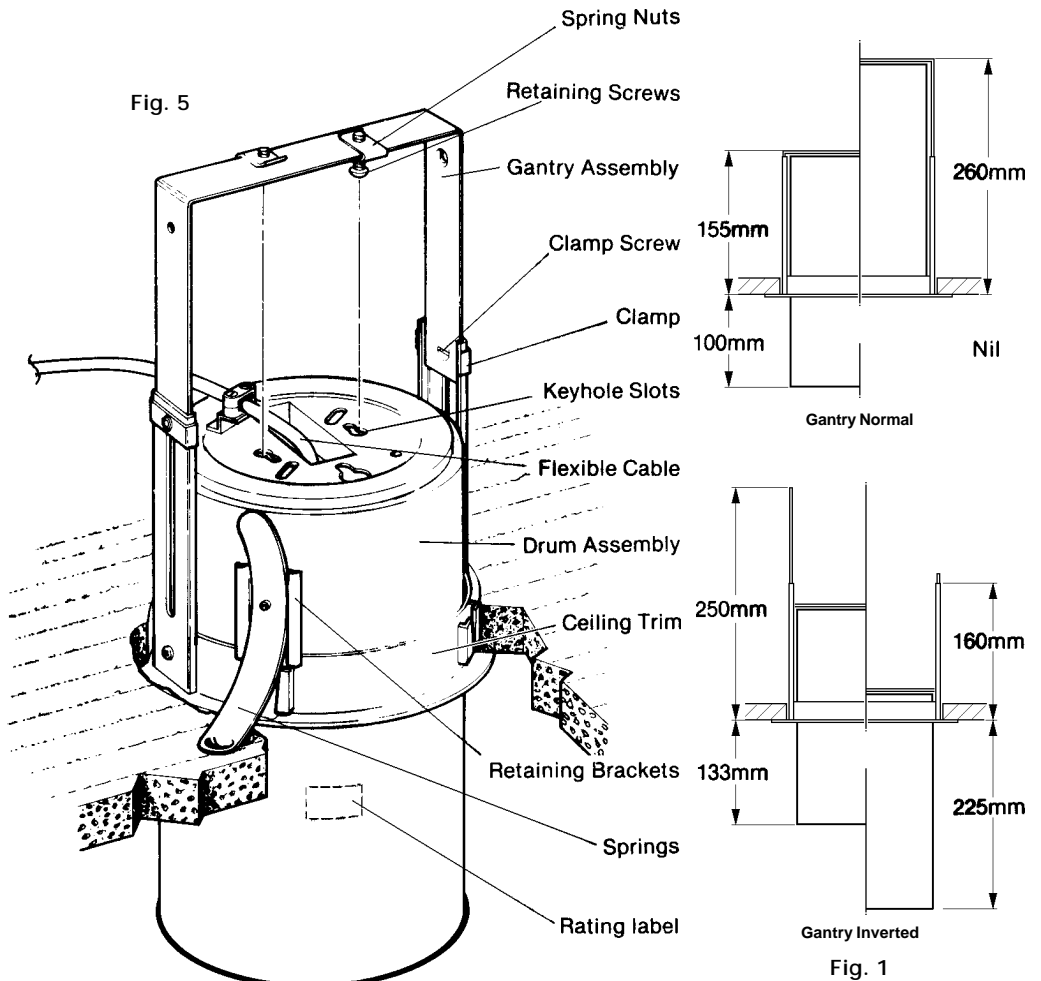

### Suitable for use indoors

Geeignet für Innenanwendung  
 Pour un usage interne  
 Adecuada para uso en interiores  
 Geschikt voor gebruik binnen  
 Lämplig för inomhusbruk



**Replace any cracked protective shield.**

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

**Ce symbole indique que vous devez remplacer tout verre de protection fêlé.**

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

**Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.**

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product  
MUST be recycled.



04.08

# Concord