

Recessed Crystalite

Installation Instructions
IS500




This Product
MUST be EARTHED

IS2331

1923 P26D
1921 P13D

Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

These luminaires have been designed for interior recessed ceiling mounting, and are suitable for mounting in combustible surfaces and recesses.

The 1923 P26D model requires a ceiling aperture of 310mm diameter and a recess depth of 95mm and the 1921 P13D model requires a ceiling aperture of 195mm diameter and a recess depth of 115mm.

The luminaire should be installed by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off mains electrical supply before commencing installation.

Installation Procedure

Switch of the mains electrical supply.

Check that the rating marked on the luminaire label conforms with the mains electrical supply.

Extract the three mounting clips from the gallery as shown in Fig. 1.

Offer the gallery to the prepared ceiling aperture and connect the flexible cable leads to the mains electrical supply using a remote junction box in the ceiling void.

Insert the gallery into the ceiling aperture and secure it in position with the three retaining clips as shown in Fig. 2.

NOTE: Two clip positions are provided, the lower position for ceiling thicknesses from 5-15mm and the upper position for ceiling thicknesses from 15-25mm.





Fit the appropriate lamp as indicated on the luminaire label, by pushing it firmly into the lampholder.

Manoeuvre the glass diffuser into position within the gallery so that the three lugs on the diffuser lay on the rim of the gallery.

WARNING: This luminaire must be earthed.

Note: This luminaire should be cleaned using warm soapy water and a soft cloth. Ensure luminaire is switched off during cleaning.

Dispose of lamps in accordance with manufacturer's instructions.

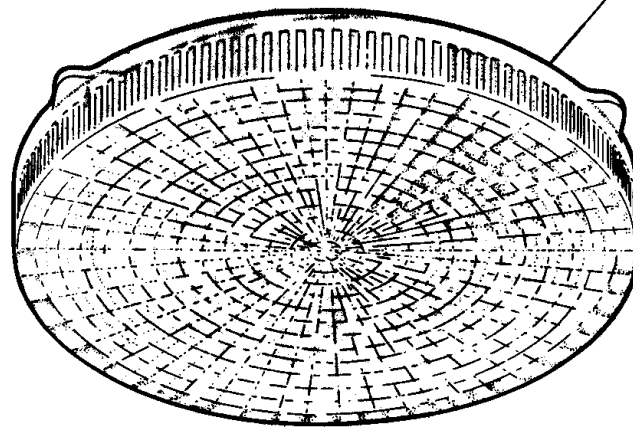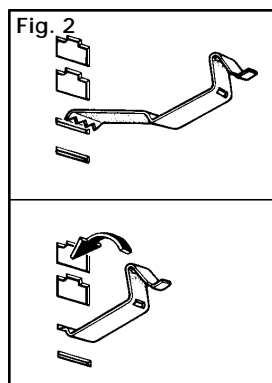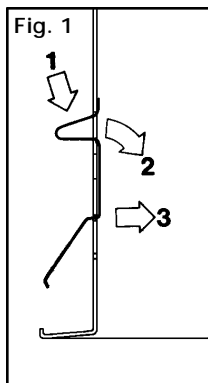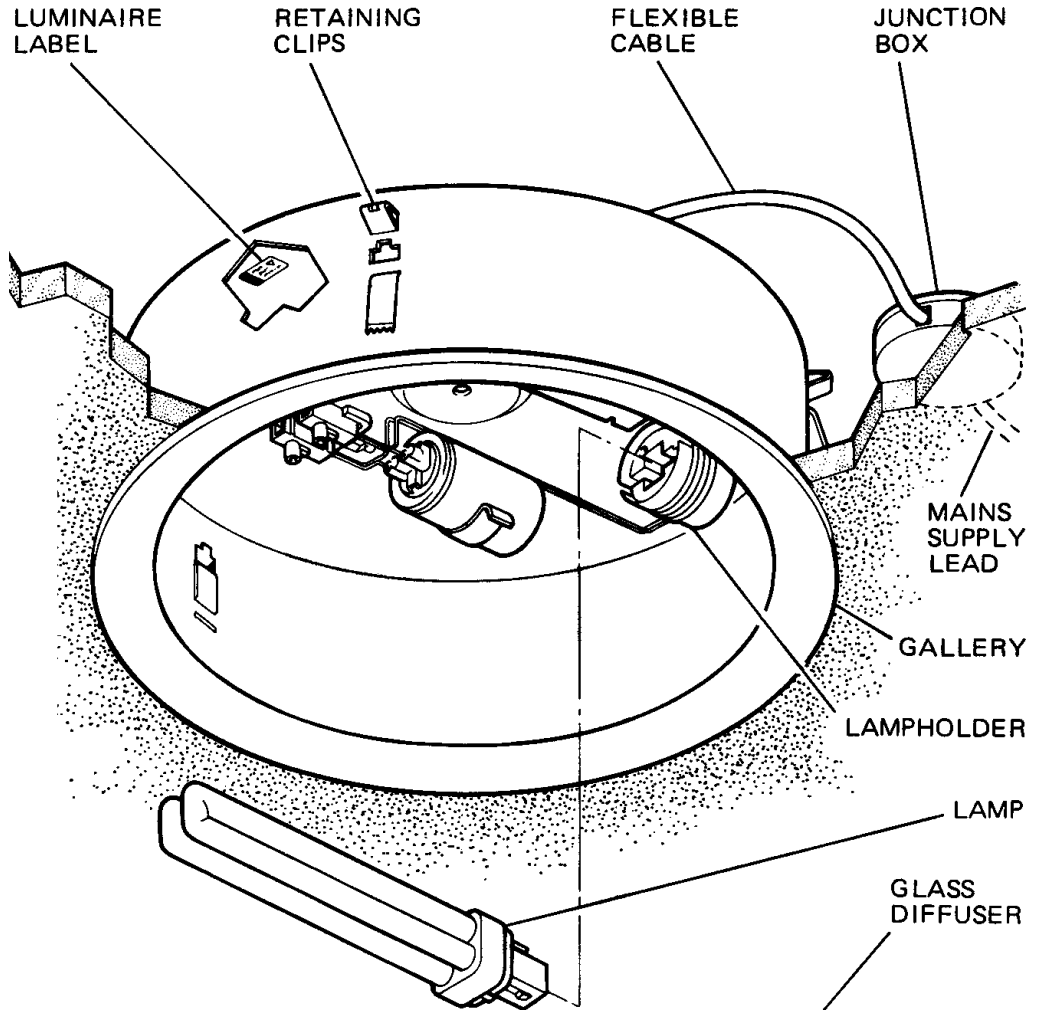

Suitable for use indoors

Geeignet für Innenanwendung

Pour un usage interne

Adecuada para uso en interiores

Geschikt voor gebruik binnen

Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbol indique que vous devez remplacer tout verre de protection fêlé.

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product
MUST be recycled.



04.08

Concord

Avis Way Newhaven East Sussex BN9 0ED
 T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com

