

EVO

LED RANGE



Start Batten IP65

Slimline, linkable LED waterproof luminaires



Start Batten IP65 – the improved version of Batten LED link – is a versatile range of slimline LED waterproof luminaires that provide an ideal solution for interior and exterior applications such as back of house, workshops, garages and outdoor covered spaces.

Start Batten IP65 now delivers an impressive efficiency of up to 125lm/W (luminaire lumen output on Twin 1,500mm versions) and the high lumen output of 6,000 lumens for twin 1,500mm Twin version.

Start Batten IP65 comes in two dimensions: 1,200mm or 1,500mm. The range benefits from a robust built (IP65 and IK08 rated) and the design allows for the luminaire to be easily linked through an IP65 rated connector. Additionally, the luminaires are easy to install with their stainless steel mounting clips.

Start Batten IP65

Slimline, linkable LED waterproof luminaires

FEATURES

- Slimline versatile LED waterproof batten
- High lumen efficacy up to 125lm/W
- High lumen output version 6000 lumens Twin 1,500mm.
- Linkable (through wiring)
- Batten LED 1200mm replaces 1x36W LFL or 2x36W LFL
- Batten LED 1500mm replaces 1x58W LFL or 2x58W LFL
- Complete with stainless steel mounting brackets
- Instant light
- Available in warm white (3000K) or neutral white (4000K)
- End caps can be ordered as accessories
- Energy Class: A++, A+, A



Code	Description	Length (mm)	Beam angle (°)	Colour Temperature (K)	System power consumption (W)	Lumen output (lm)	Efficacy (lm/w)	Lifetime (Hour)
Start Batten IP65 - Single								
0045150	START BATTEN IP65 20W 1200 3K	1246	120	3000	20	2300	115	30,000
0045151	START BATTEN IP65 20W 1200 4K	1246	120	4000	20	2500	125	30,000
0045154	START BATTEN IP65 26W 1500 3K	1542	120	3000	26	3000	115	30,000
0045155	START BATTEN IP65 26W 1500 4K	1542	120	4000	26	3200	123	30,000
Start Batten IP65 - Twin								
0045152	START BATTEN IP65 42W 1200 3K	1200	120	3000	42	4850	115	30,000
0045153	START BATTEN IP65 42W 1200 4K	1200	120	4000	42	5200	124	30,000
0045156	START BATTEN IP65 48W 1500 3K	1500	120	3000	48	5520	115	30,000
0045157	START BATTEN IP65 48W 1500 4K	1500	120	4000	48	6000	125	30,000

Start Batten IP65 - Accessories

0045138	Start Batten IP65 SINGLE END CAP
0045139	Start Batten IP65 TWIN END CAP


Dimensions (mm)

Single Lamp	L1 (mm)	L2 (mm)	L3 (mm)
0045150 0045151	1291	1246	1078
0045154 0045155	1588	1543	1378

Twin Lamp	L1 (mm)	L2 (mm)	L3 (mm)
0045152 0045153	1253	1200	1078
0045156 0045157	1553	1500	1378



Photometric Data

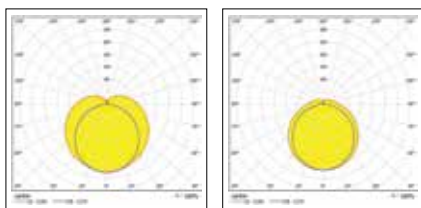

Single IP65 1200 3K

Twin IP65 1200 3K

www.feilosylvania.com

T: F:
Email:

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited.

by **FEILO SYLVANIA**