



Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

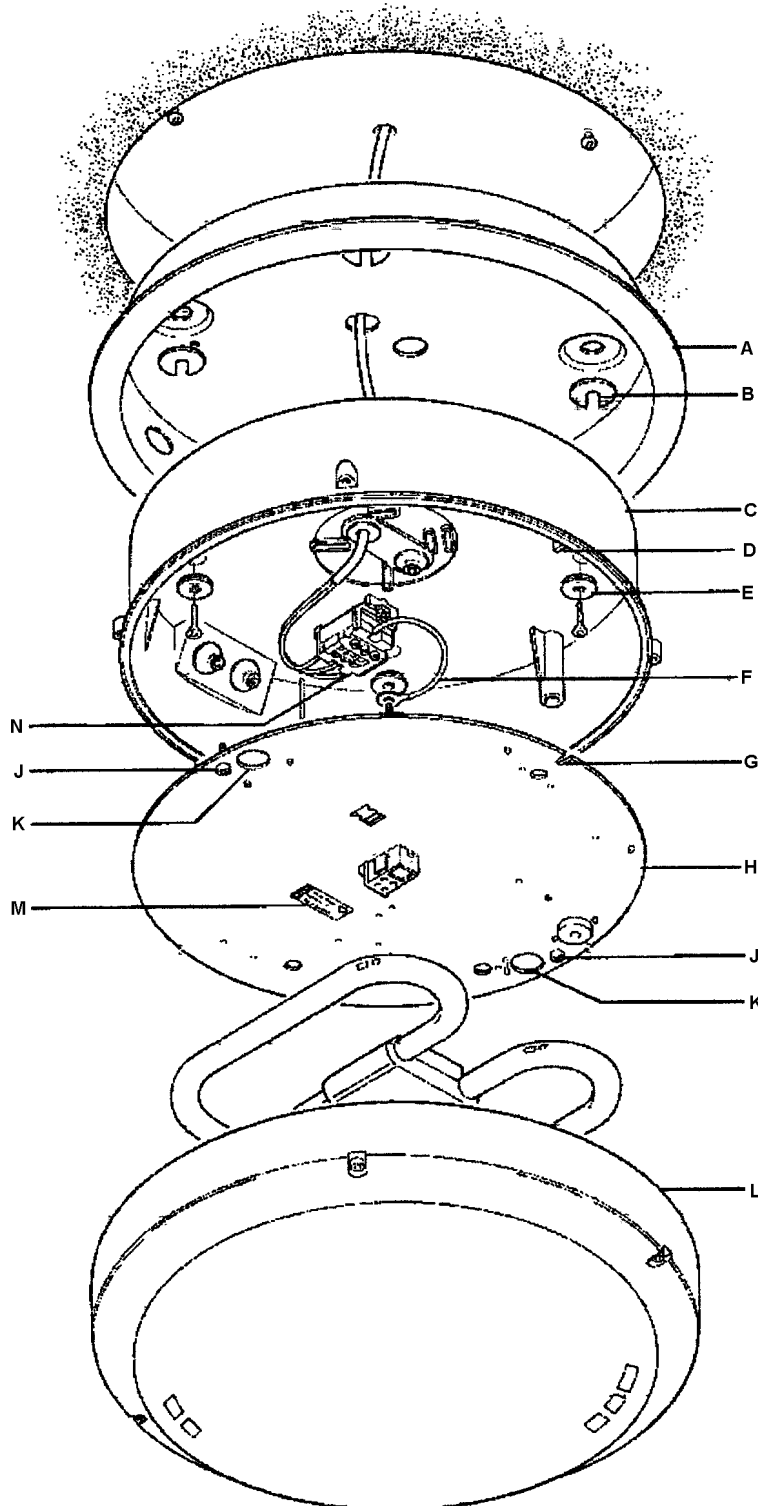

Check List:

4 x M4 x 12mm Machine Screws
 4 x Slip Washers
 4 x Grommets
 4 x Seal Washers
 2 x Silicone Sleeving

Installation Procedure

Prepare a recess of 310mm diameter x 47mm deep for mounting tray (A).

Prepare suitable fixings in recess to suit holes in mounting tray (A).

NOTE: Mounting tray (A) and housing (C) are marked 'TOP' for wall mounting.

Partially screw in suitable round headed screws.

Pass supply cable through tray (A), locate tray in position, insert slip washers (B) under screw heads and tighten screws.

Remove trim/diffuser assembly (L) from housing (C).

NOTE: Partially undo each screw in turn, repeat procedure until all screws are free.

Check rating marked on label (M) conforms with mains electricity supply.

Unscrew gear plate fixing screws (J), insert fingers in holes (K) and pull gear plate (H) from housing (C).

Drill 5mm clearance holes in housing (C) for outrigger screws.

Pierce a grommet and feed supply cable into housing (Fig. 1).

Secure housing in position using supplied screws with supplied seal washers (E).

NOTE: Sealing face of washer to face housing.

Secure earth lead (F) between screw head and seal washer as shown.

Cover and connect leads in respectively marked terminals in terminal block (N).


Push cable back into grommet (Fig. 2).

Align gear plate cut-out (G) with housing rib (D), push gear plate in position and tighten fixing screws (J).

Fit appropriate lamp as indicated on label (M).

Secure trim/diffuser (L) to housing (C).

WARNING: To ensure IP65 rating, waterproof silicon adhesive must be applied around all grommet cable entries and under the heads of all fixing screws.

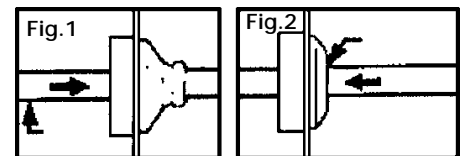

Suitable for use indoors
 Geeignet für Innenanwendung
 Pour un usage interne
 Adecuada para uso en interiores
 Geschikt voor gebruik binnen
 Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbole indique que vous devez remplacer tout verre de protection fêlé.

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.



Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasiasa vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product
 MUST be recycled.



01.08

Concord

Avis Way Newhaven East Sussex BN9 0ED
 T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com



© Concord Lighting Ltd.