




SylCircle

Wall or ceiling mounted LED luminaires

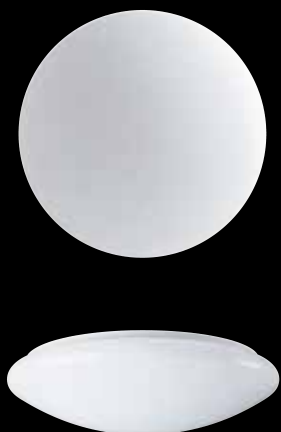

SylCircle is a range of wall or ceiling mounted LED luminaires developed for hallways, kitchens, bathrooms and wet areas. The range now features microwave sensor models for increased energy savings.

SylCircle offers a simple and robust body (IK03) with a white opal diffuser allowing the luminaire to cast a uniform warm light across the room.

The **SylCircle Sensor** version is the perfect solution for high traffic areas across the home where consumers


wish to adjust light when presence is detected, and save energy by switching off when an area is unoccupied. Furthermore, the range has an IP20 rating ensuring it is safe for installing in a bathroom or certain wet areas.

SylCircle is available in warm white (3,000K), neutral white (4,000K) and in four different sizes - SylCircle is a practical fitting that is ideal for the majority of applications in your home.

SylCircle Wall or ceiling mounted LED luminaires


FEATURES

- **NEW:** improved efficiency up to 90 lum/watt
- Highly efficient LED chip technology
- Available in four diameters: 180mm, 250mm, 330mm or 360mm
- Can be wall or ceiling mounted
- 17W and **NEW** 24W microwave sensor version allows for automatic on/off presence control, providing further energy cost savings
- Even and uniform light distribution
- High performance, up to 2,060lm
- Supplied with LED driver (non-dimmable)
- Low maintenance with 30,000 hours LED life expectancy
- Energy Class: A++, A+, A
- IK03 rated white opal diffuser
- Warm White (3000K) and Neutral White (4000K)

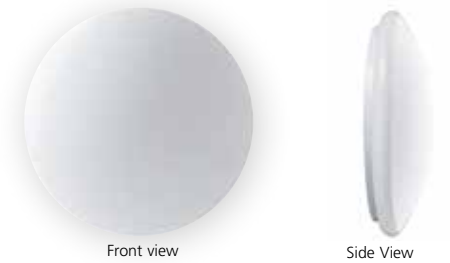


Item Code	Description	Body size (mm)	Colour Temperature	Colour Temperature (K)	Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Efficacy (lm/W)	
SylCircle									
0043280	SYLCIRCLE 6W 3000K	180Ø	Warm White	3000	220-240	6	500	83	
0043260	SYLCIRCLE 6W 4000K	180Ø	Neutral White	4000	220-240	6	515	86	
0043281	SYLCIRCLE 12W 3000K	250Ø	Warm White	3000	220-240	12	1000	83	
0043261	SYLCIRCLE 12W 4000K	250Ø	Neutral White	4000	220-240	12	1030	86	
0043282	SYLCIRCLE 17W 3000K	330Ø	Warm White	3000	220-240	17	1500	88	
0043262	SYLCIRCLE 17W 4000K	330Ø	Neutral White	4000	220-240	17	1545	91	
0043283	SYLCIRCLE 24W 3000K	360Ø	Warm White	3000	220-240	24	2000	83	
0043263	SYLCIRCLE 24W 4000K	360Ø	Neutral White	4000	220-240	24	2060	86	
SylCircle Sensor									
0043264	SYLCIRCLE SENSOR 17W 3000K	330Ø	Warm White	3000	220-240	17	1500	88	
0043265	SYLCIRCLE SENSOR 17W 4000K	330Ø	Neutral White	4000	220-240	17	1545	91	
NEW	0043256	SYLCIRCLE SENSOR 24W 3000K	360Ø	Warm White	3000	220-240	24	2000	83
NEW	0043257	SYLCIRCLE SENSOR 24W 4000K	360Ø	Neutral White	4000	220-240	24	2060	86

Photometric data

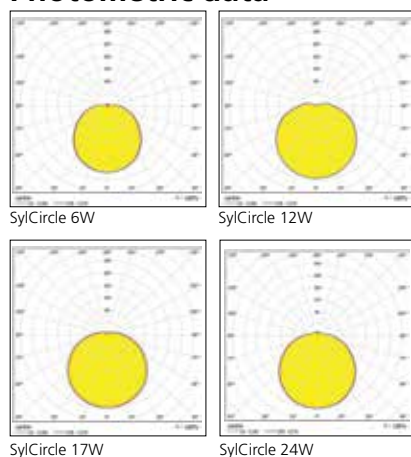

Dimension (mm)

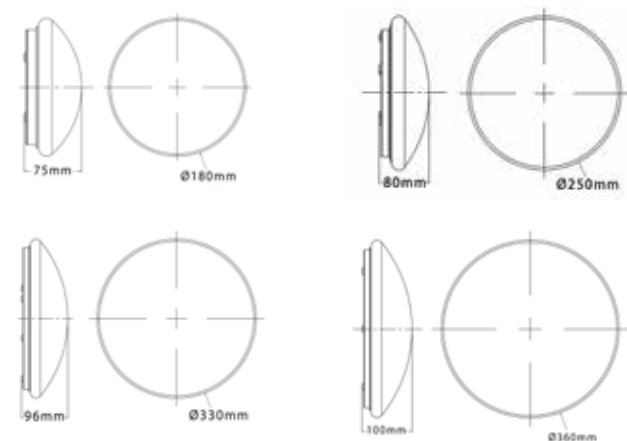

www.feilosylvania.com

T: F:
Email:

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited.

by **FEILO SYLVANIA**