



4163115

**Disconnect from mains supply before replacing the fuse or the lamp.**  
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
 Koppla bort spänningen före byte av en säkring eller en lampa.



**Switch off**  
 Abschalten  
**Débrancher**  
 Desconectar  
**Uitschakelen**  
 Släng av

This luminaire can be mounting on a 50.8mm conduit box or directly to mounting surface, or can be semi-recessed using Recessing Kit 1590ORK.

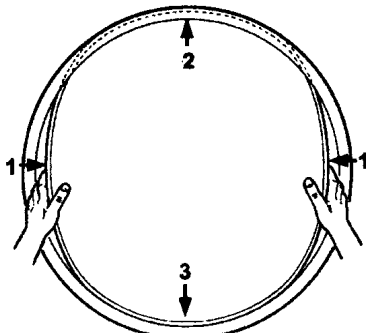

**FITTING DIFFUSER**  
 1. FLEX IN 2. INSERT UNDER RIM 3. CENTRALISE

**INSTALLATION PROCEDURE** + **IS500**

Carefully remove diffuser (D) as shown.

Check rating marked on label (C) conforms with mains electrical supply.

Partially screw M4 screws in conduit box lugs or prepare suitable fixings in mounting surface at 192mm for outrigger holes (B).

Fit supplied grommets (G) in gallery (A).

Pass mains supply leads through grommet.


Secure gallery (A) to conduit box or to

mounting surface using suitable round headed screws through outrigger holes (B).

Cover line and neutral mains supply leads with supplied silicone sleeving and connect supply leads and earth lead in respectively marked terminals in terminal block (F).

Fit appropriate lamp as indicated on label (C) by pushing it firmly in lampholder.

Fit diffuser (D) in gallery rim as shown ensuring it is held concentrically by retaining clips (E).

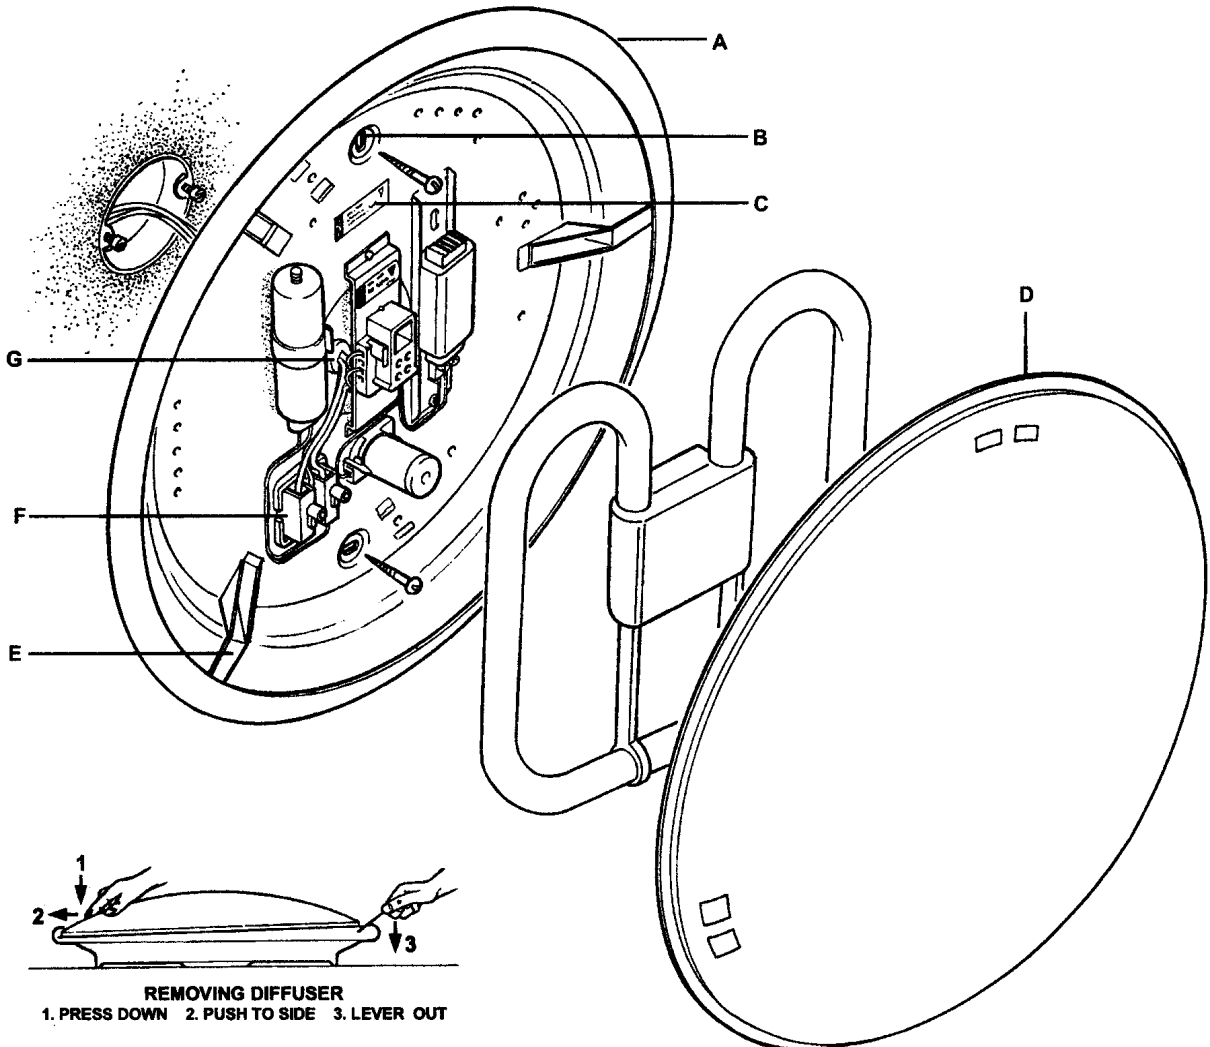

**REMOVING DIFFUSER**  
 1. PRESS DOWN 2. PUSH TO SIDE 3. LEVER OUT

Suitable for use indoors  
 Geeignet für innenanwendung  
 Pour un usage interne

Adecuada para uso en interiores  
 Geschikt voor gebruik binnen  
 Lämpig för inomhusbruk

This Electrical Product MUST be recycled.

