



4163118

**Disconnect from mains supply before replacing the fuse or the lamp.**  
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
 Koppla bort spänningen före byte av en säkring eller en lampa.



**Switch off**  
 Abschalten  
**Débrancher**  
 Desconectar  
**Uitschakelen**  
 Stäng av

This luminaire has been designed for maintained emergency operation with a duration of 3 hours.

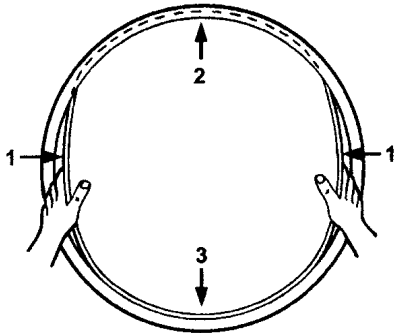

**FITTING DIFFUSER**  
 1. FLEX IN 2. INSERT UNDER RIM 3. CENTRALISE



**INSTALLATION PROCEDURE** + IS500

Remove diffuser (D) as shown.  
 Check rating marked on label (J) conforms with mains electrical supply.  
 Prepare suitable fixings in mounting surface for outrigger holes (K) - see diagram below.  
**NOTE:** Housing (A) is marked TOP if wall mounting.  
 Enter supply connection date on battery pack label (C).  
 Fit supplied grommets in housing (A).  
 Pass mains supply leads and unswitched live mains supply lead through grommets.  
 Secure housing to mounting surface using

suitable round headed screws.  
 Cover line & neutral mains supply leads and unswitched live mains supply lead with supplied silicone sleeving.  
 Connect leads in respectively marked terminals in terminal block (H).  
 Fit appropriate lamp as indicated on label (J).  
 Connect battery plug and socket (E) and (F).  
 Fit diffuser (D) as shown in diagram.  
**NOTE:** Luminaire is protected by 3A fuse (G).

**WARNING: DO NOT SWITCH OFF AFTER INSTALLATION, AS UNSWITCHED SUPPLY MUST BE MAINTAINED. IF INTERRUPTION TO SUPPLY IS UNAVOIDABLE, THE BATTERIES MUST BE DISCONNECTED OR DAMAGE MAY RESULT**

**NOTE: THIS LUMINAIRE IS NOT SUITABLE FOR RECESSED MOUNTING**

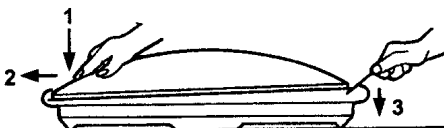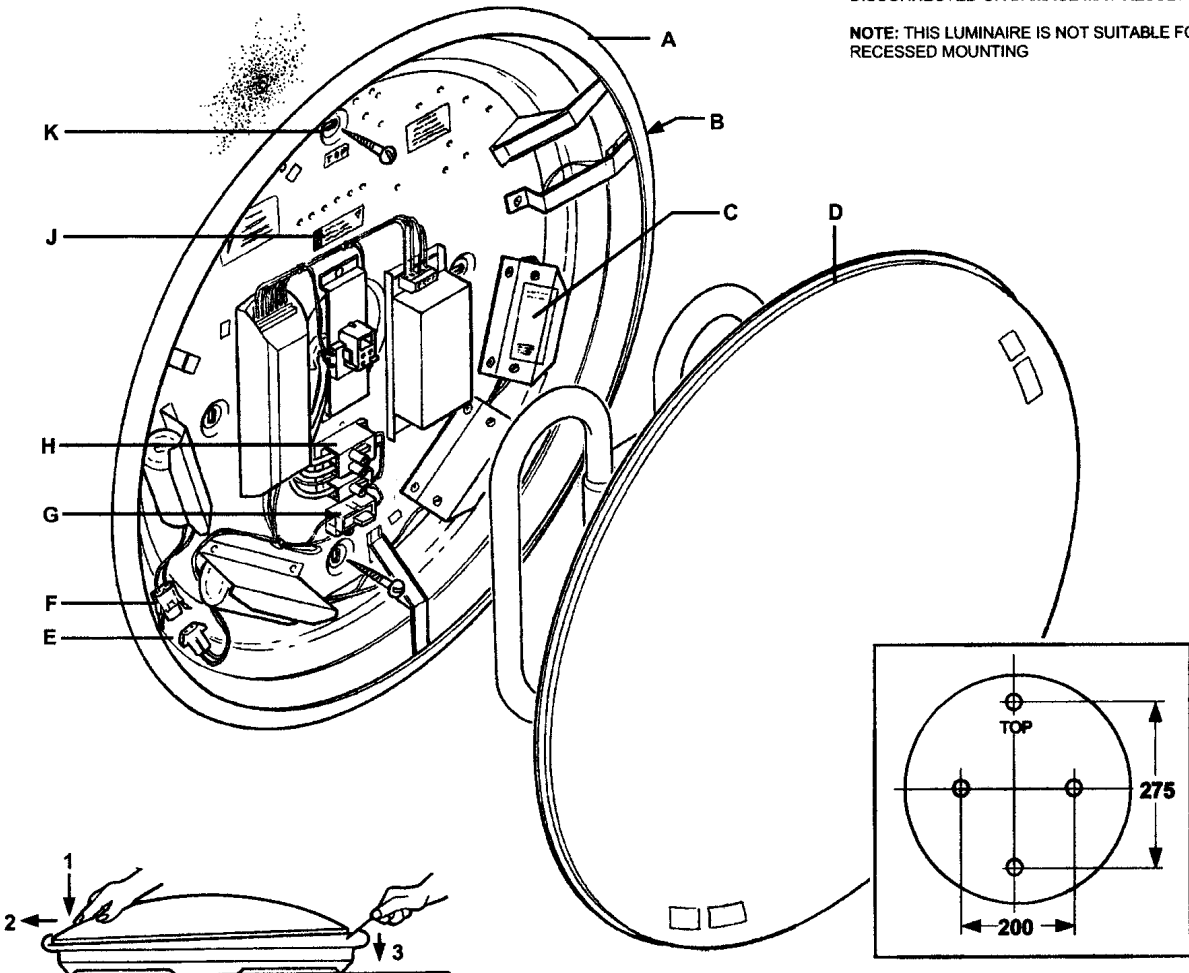

**REMOVING DIFFUSER**  
 1. PRESS DOWN 2. PUSH TO SIDE 3. LEVER OUT

Suitable for use indoors  
 Geeignet für innenanwendung  
 Pour un usage interne

Adecuada para uso en interiores  
 Geschikt voor gebruik binnen  
 Lämpig för inomhusbruk

This Electrical Product MUST be recycled.

