



Wall or ceiling mounted LED luminaires



SylCircle

SylCircle is a range of wall or ceiling mounted LED luminaires, available in 3000K and 4000K and four different sizes, developed for hallways, kitchens, bathrooms and wet areas.

The range features microwave sensor models, perfect for high traffic areas enabling adjustments in light levels when presence is detected. This also increases energy saving by switching off when an area is unoccupied.

SylCircle has a new dual tone addition, allowing a choice between 3000K and 4000K, simply by a flick of the switch. This gives flexibility in changing the colour temperature, making the SylCircle ideal for multiple applications..

Features



- High efficiency of up to 90 lumen/watt
- New addition of dual tone, enables switch between 3000K and 4000K colour temperatures
- Available in four diameters: 180mm, 250mm, 330mm or 360mm
- Can be wall or ceiling mounted
- 17W and 24W microwave sensor version allows for automatic on/off presence control, providing further energy cost savings
- Even and uniform light distribution
- High performance, up to 2,060lm
- Low maintenance with 30,000 hours LED life expectancy
- Energy Class: A++, A+, A
- IK03 rated white opal diffuser
- Warm White (3000K) and Neutral White (4000K)



Product information

Code	Description	Body size (mm)	Colour Temperature	Colour Temperature (K)	Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Efficacy (lm/W)
SylCircle								
0043280	SylCircle 6W 3000K	180Ø	Warm White	3000	220-240	6	500	83
0043260	SylCircle 6W 4000K	180Ø	Neutral White	4000	220-240	6	515	86
0043281	SylCircle 12W 3000K	250Ø	Warm White	3000	220-240	12	1000	83
0043261	SylCircle 12W 4000K	250Ø	Neutral White	4000	220-240	12	1030	86
0043282	SylCircle 17W 3000K	330Ø	Warm White	3000	220-240	17	1500	88
0043262	SylCircle 17W 4000K	330Ø	Neutral White	4000	220-240	17	1545	91
0043283	SylCircle 24W 3000K	360Ø	Warm White	3000	220-240	24	2000	83
0043263	SylCircle 24W 4000K	360Ø	Neutral White	4000	220-240	24	2060	86
SylCircle Sensor								
0043264	SylCircle Sensor 18W 3000K	330Ø	Warm White	3000	220-240	18	1280	76
0043265	SylCircle Sensor 18W 4000K	330Ø	Neutral White	4000	220-240	18	1300	76
0043256	SylCircle Sensor 24W 3000K	360Ø	Warm White	3000	220-240	24	1625	75
0043257	SylCircle Sensor 24W 4000K	360Ø	Neutral White	4000	220-240	24	1625	75
SylCircle CCT change / Dual Tone								
0043238	SylCircle Dim Dual Tone 18W 3000K/4000K	330	Warm/Neutral	3000/4000	220-240	18	1500	83
0043239	SylCircle Dim Dual Tone 24W 3000K/4000K	360	Warm/Neutral	3000/4000	220-240	24	2000	83

Photometric data

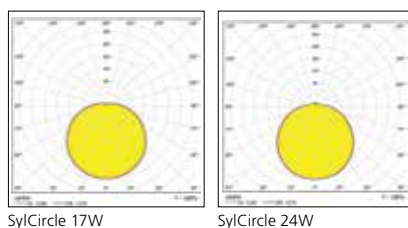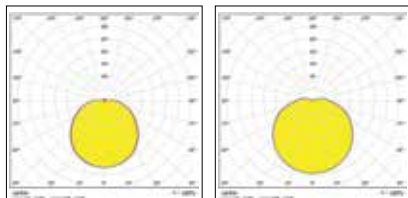

Dimension (mm)

