



4063633 4063635 4063637 4063657
4063659 4063661 4063681 4063683
4063685 4064507 4064509 4064783

Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

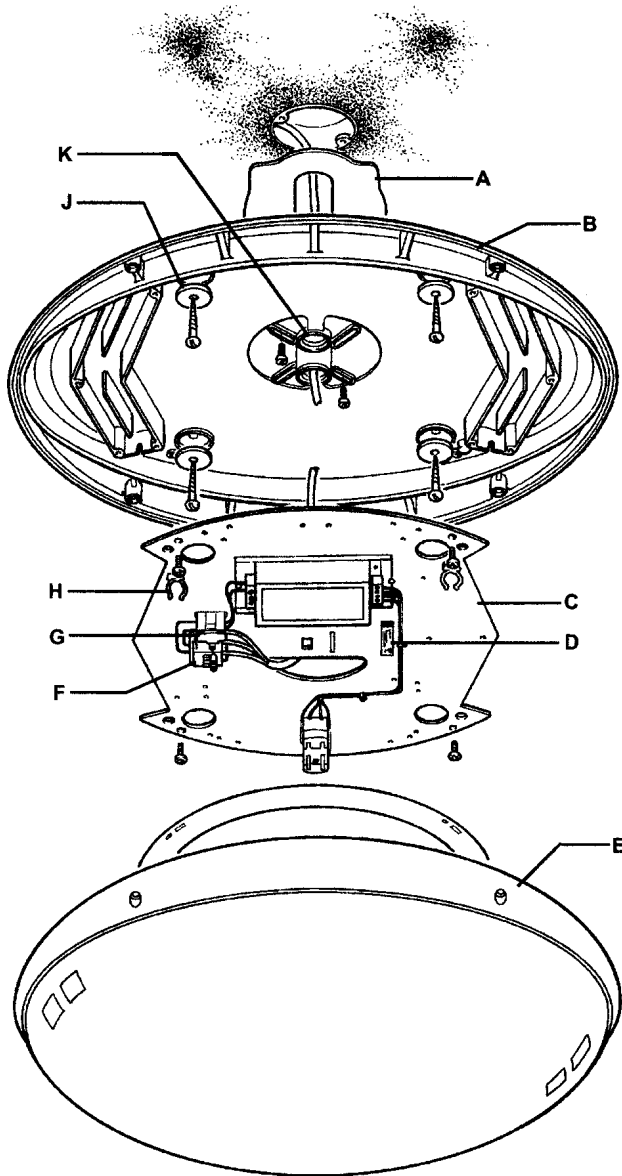

Checklist

- 2 x Silicone Sleeving
- 2 x Grommets
- 1 x Gasket
- 4 x Seal Washers

Installation Procedures

Remove trim/diffuser assembly (E).

Remove gear tray (C).

Prepare suitable fixings in wall or ceiling at 160mm centres.
NOTE: Housing (B) is marked 'TOP' if wall mounting.

Drill 5mm dia. outrigger holes in housing, or M4 clearance holes if fixing to a conduit box.
NOTE: Outrigger holes must be used in all installations.

Stick sealing gasket (A) on housing (B).

Fit supplied grommets (K) in housing - Fig. 1.

Pierce and pass mains supply cable through grommets.

Secure housing (B) to mounting surface using suitable fixing screws and seal washers (J). If applicable secure housing to conduit with M4 screws.
NOTE: Sealing side of washer to face housing.
NOTE: Apply waterproof sealant around supply cable, grommets and heads of all housing fixing screws.

Pass supply cable through gear tray (C) and fit gear tray.
NOTE: Tray will only fit in one position.




Cover all electrical supply cable leads with supplied silicone sleeving.

Connect cable leads in respectively marked terminals in terminal block (F).

Fit appropriate lamp as indicated on label (D) ensuring it is retained by clips (H).

Fit trim/diffuser assembly (E).

NOTE: Luminaire is protected by a 3A fuse (G).

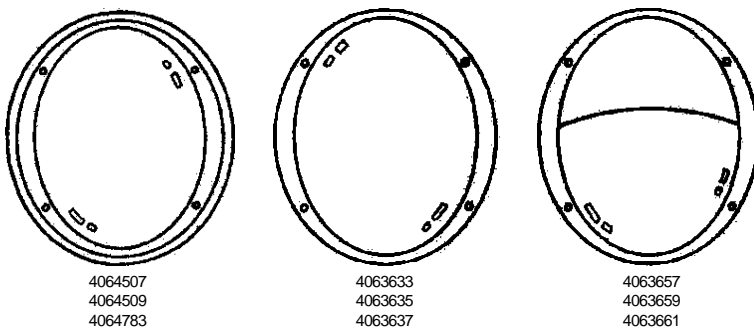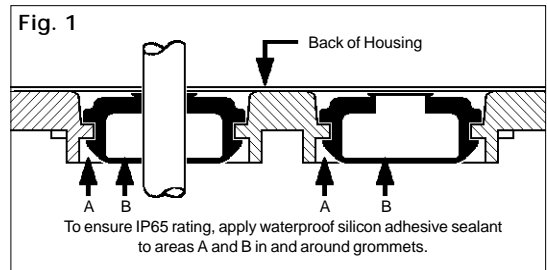

Suitable for use indoors
Geeignet für Innenanwendung
Pour un usage interne
Adecuada para uso en interiores
Geschikt voor gebruik binnen
Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbole indique que vous devez remplacer tout verre de protection fêlé.

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.



Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasiasa vioittunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product
MUST be recycled.



12.07

Concord

Avis Way Newhaven East Sussex BN9 0ED
T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com

