



Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.




Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

Multi purpose lighting fittings for interior or exterior use ceiling or wall mounted-virtually unbreakable

Trimline Installation (tungsten units)

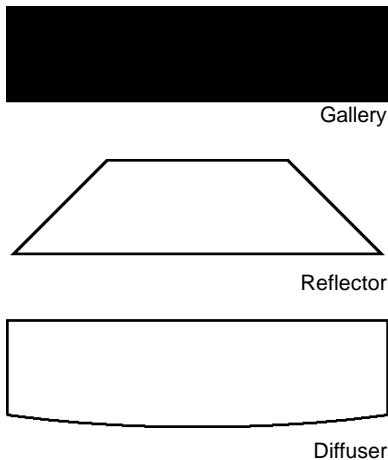

Switch off electrical supply at the Mains

- 1 Remove diffuser from the gallery by twisting a coin in the slot provided and carefully detach the reflector by loosening the screw and/or easing the reflector off the retaining lugs, where applicable.
- 2 Fittings are pre-wired with heat resisting leads.
Brown - Live Blue - Neutral Green/Yellow - *Earth.
Leads should be passed through the hole or knockout in the gallery and connected to the supply using a high temperature terminal block, preferably housed in a 2" centre conduit box. If a conduit box is not available, the supply may be connected inside the gallery using a suitable high temperature terminal block. Protect the incoming supply leads with high temperature sleeves.
* The 200mm (8") dia (1027) model is double insulated  so an Earth lead is not required.
- 3 Screw the gallery to the ceiling/wall, preferably to a 2" centre conduit box.
(Other international fixing centres are also provided)
When wall mounted, the lampholder should be at the top!
When mounting in exposed positions use a conduit box gasket.
- 4 Refit the reflector carefully by tightening the screw and/or easing the reflector under the retaining lugs, where applicable.
- 5 Fit standard Pearl GLS lamps only.
DO NOT EXCEED MAXIMUM WATTAGE STATED ON THE REFLECTOR.
- 6 Snap on the diffuser.
If in any doubt, consult a qualified electrician.

Suitable for use indoors
Geeignet für Innenanwendung
Pour un usage interne
Adecuada para uso en interiores
Geschikt voor gebruik binnen
Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbole indique que vous devez remplacer tout verre de protection fêlé.

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.



Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product
MUST be recycled.



06.08

Concord