


CD 622 T
CD 632 T
CD 642 P

Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

These luminaires are designed for wall or ceiling mounting in interior situations and may be mounted on combustible surfaces.

These luminaires should be installed by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off mains electrical supply before commencing installation.

Installation Procedures

Switch off mains electrical supply.

Loosen the retaining screws and lift the glass from the gallery.

Check that the rating shown on the luminaire label conforms with the mains electrical supply.

Provide suitable fixing devices (e.g. wall plugs etc.) in the mounting surface as required, with their centres matching those of the fixing holes in the gallery.

Pass the mains supply leads through the grommet in the gallery and secure the gallery to the mounting surface using appropriate screws (not supplied) through the fixing holes.

Slide a silicone rubber sleeve, supplied loose, over each mains supply lead. Connect the leads to the correspondingly marked terminals within the gallery, ensuring that the silicone sleeve touches the terminal.


Fit the appropriate lamp as indicated on the luminaire label.

Carefully fit the glass and 'finger' tighten it's retaining screws.

WARNING: These luminaires must be earthed.

NOTE: These luminaires should be cleaned using warm soapy water and a soft cloth. Ensure that the luminaire is switched off during cleaning.

Dispose of lamps in accordance with the manufacturer's instructions.

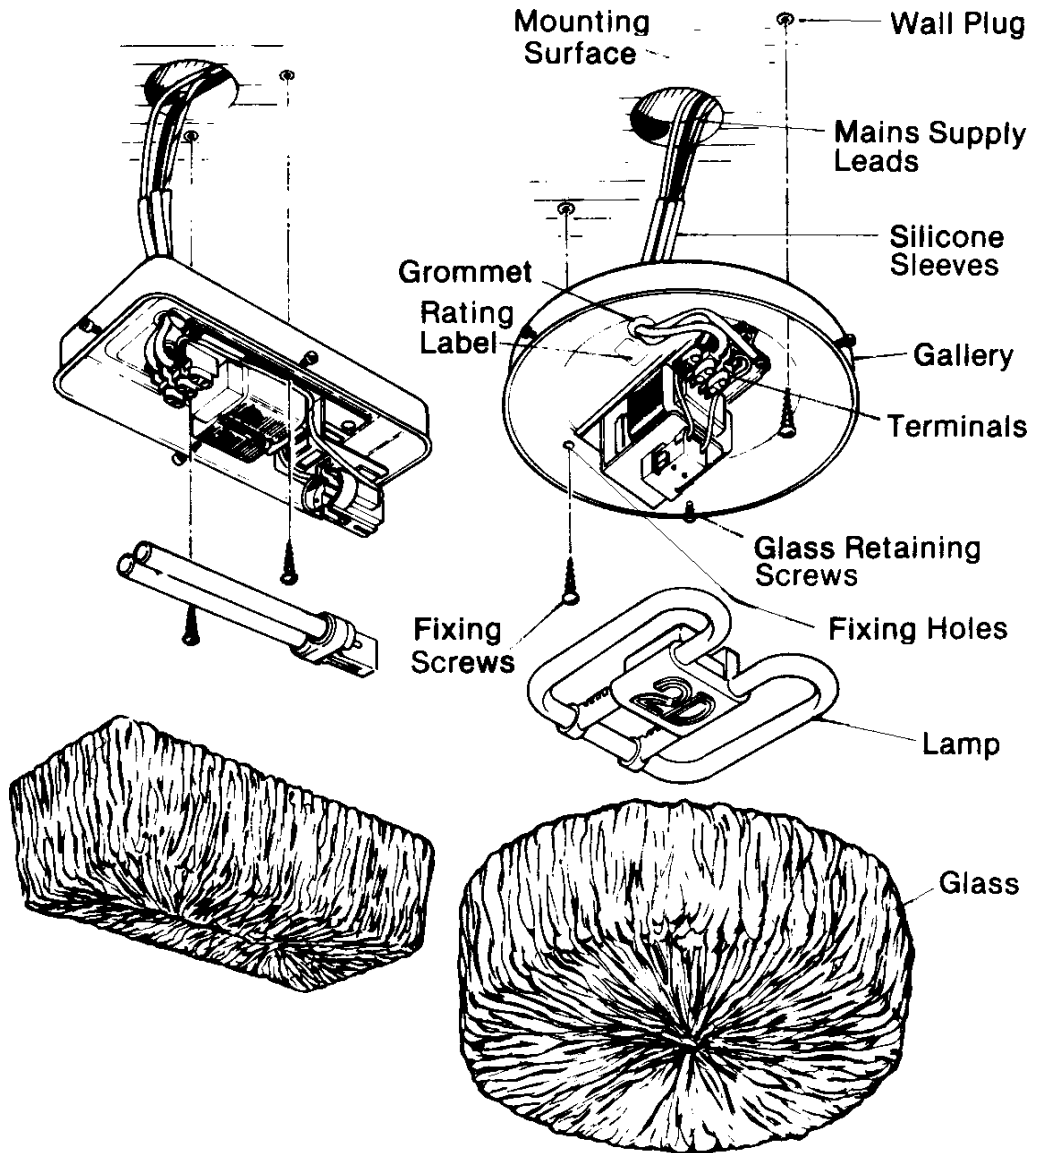

Suitable for use indoors

Geeignet für Innenanwendung
Pour un usage interne
Adecuada para uso en interiores
Geschikt voor gebruik binnen
Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbol indique que vous devez remplacer tout verre de protection fêlé.

Este simbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetsglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product
MUST be recycled.



04.08