



Disconnect from mains supply before replacing the fuse or the lamp.
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
 Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
 Abschalten
Débrancher
 Desconectar
Uitschakelen
 Stäng av

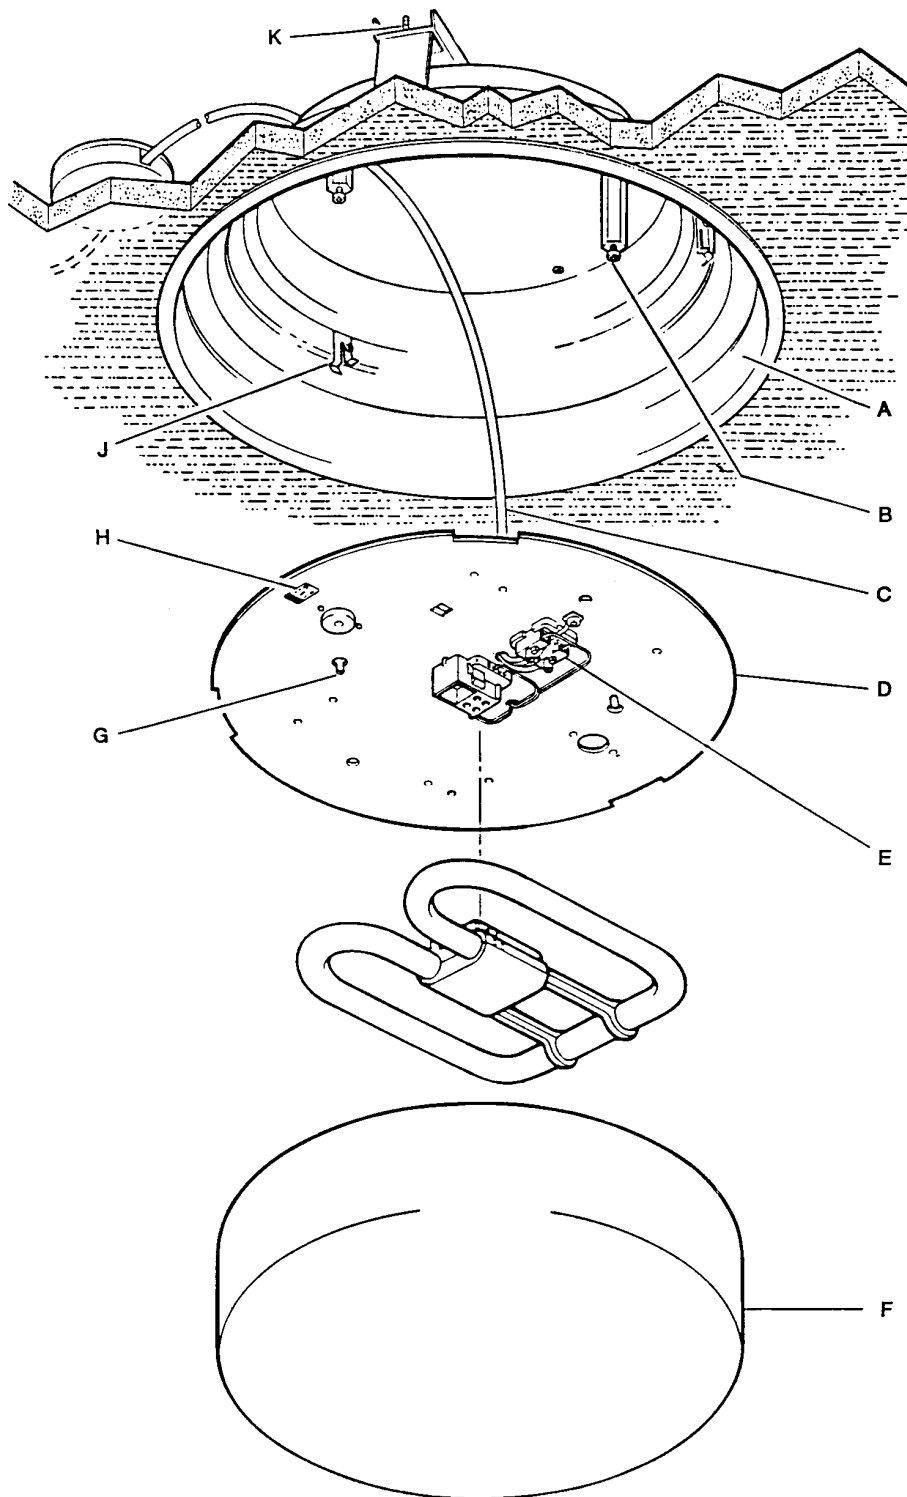

This luminaire is suitable for interior recessed ceiling mounting, and requires a 375mm diameter ceiling aperture and a recess depth of 165mm.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off mains electrical supply before commencing installation.

INSTALLATION PROCEDURE

Remove diffuser (F) by easing it out of diffuser clips (J) in housing (A). Check that rating on label (H) conforms with mains electrical supply.

Disconnect flexible cable (C) from terminal block (E), loosen gear tray retaining screws (B) and remove gear tray (D) from housing (A).

Unscrew gantry screws (K) to allow adequate clearance between gantry legs and housing flange to accommodate ceiling thickness.

Connect flexible cable (C) to mains electrical supply using a suitable junction box in ceiling void.

Place housing/gantry assembly in ceiling aperture and engage gantry legs on inner surface of ceiling. Tighten gantry screws (K) ensuring that housing flange abuts ceiling.

Feed flexible cable (C) through cable entry hole in gear tray (D). Locate keyhole slots (G) over heads of retaining screws (B), rotate gear tray and tighten retaining screws (B).

Connect leads of flexible cable (C) to respectively marked terminals in terminal block (E).

Fit appropriate lamp as indicated on label (H).

Fit diffuser (F) by pushing it squarely into the three diffuser retaining clips (J).

WARNING:
 THIS LUMINAIRE MUST BE EARTHED



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbol indique que vous devez remplacer tout verre de protection fêlé.

Este simbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta el saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

Suitable for use indoors
 Geeignet für Innenanwendung
Pour un usage interne
 Adecuada para uso en interiores
Geschikt voor gebruik binnen
 Lämpig för inomhusbruk



This Electrical Product
 MUST be recycled.



< Millimetres >