


4010525 4010529 4010547 4010551 4037094  
 4037095 4062902 4062903 4062916 4062917  
 4109143 4109146 4109147 4109148 4109149  
 4109185 4109187 4109188 4109189 4109190  
 4135970 4136609 4138030 4139627 4140782  
 4142811 4147954 4156838 4158140 4164109  
 4164853 4165085 4165190 4165356 4165534  
 4165538

**Disconnect from mains supply before replacing the fuse or the lamp.**  
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
 Koppla bort spänningen före byte av en säkring eller en lampa.



**Switch Off**  
 Abschalten  
**Débrancher**  
 Desconectar  
 Uitschakelen  
 Stäng av

This luminaire is suitable for interior ceiling or wall mounting.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch of mains electrical supply before commencing installation.

#### Installation Procedure

Check that the rating marked on the label (H) conforms with mains electrical supply.

Partially screw suitable round headed screws (A) into mounting surface at 260mm centres.  
 NOTE: Gallery is marked 'TOP' for wall mounting.

Feed mains supply cable (B) into gallery.

Locate mounting holes (C) over fixing screws (A), insert slip washers (G) under screw heads and tighten screws.

Connect mains supply cable in respective terminals in terminal block (D).


Fit appropriate lamp as shown on label (H) by pushing it firmly into lampholder (E).

Locate diffuser (F) in trim ensuring it is held concentrically by retaining clips.

**WARNING:** This luminaire must be earthed.

**NOTE:** This luminaire should be cleaned using warm soapy water and a soft cloth. Ensure luminaire is switched off during cleaning.

Dispose of lamps in accordance with manufacturer's instructions.

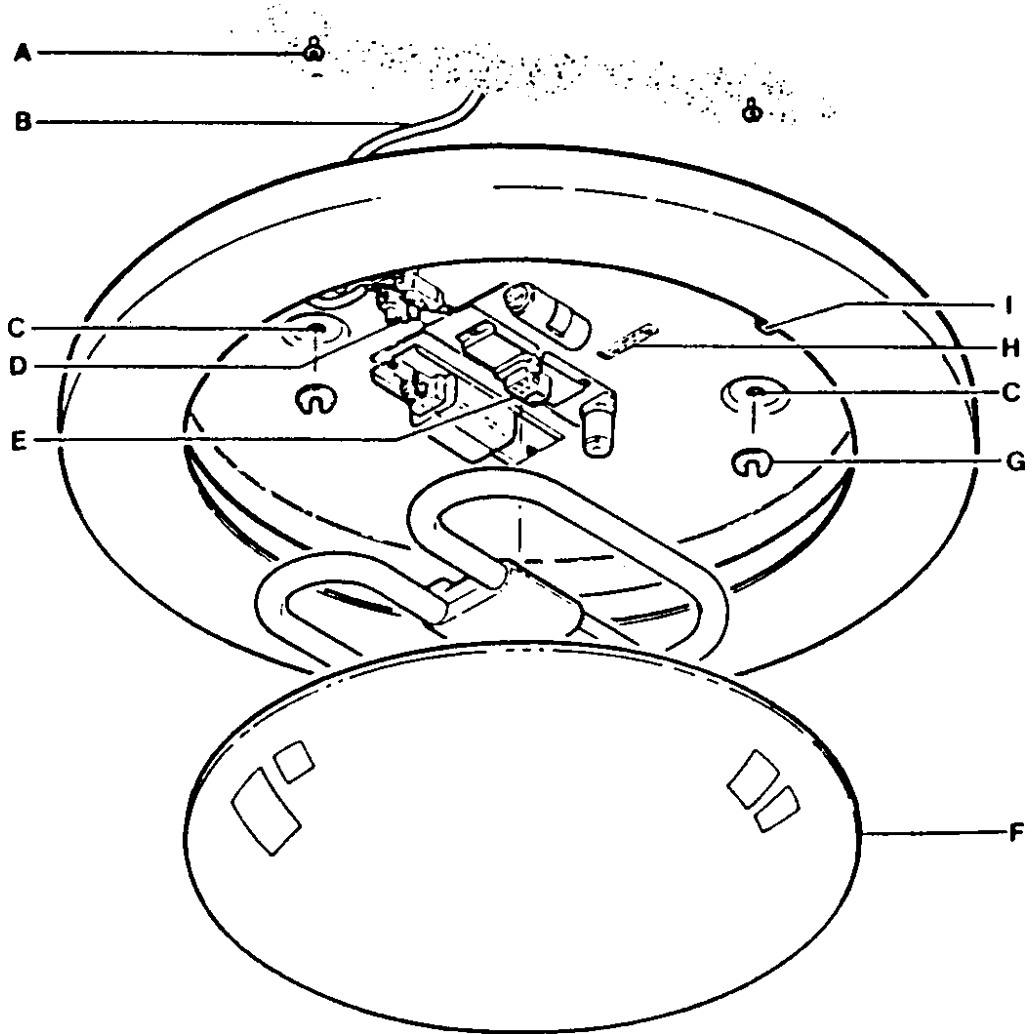

#### Suitable for use indoors

Geeignet für Innenanwendung

Pour un usage interne

Adecuada para uso en interiores

Geschild voor gebruik binnen

Lämplig för inomhusbruk



**Replace any cracked protective shield.**

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

**Ce symbol indique que vous devez remplacer tout verre de protection fêlé.**

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

**Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.**

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product MUST be recycled.



04.08

# Concord

Avis Way Newhaven East Sussex BN9 0ED  
 T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com



© Concord Lighting Ltd.