

Characteristics of the appliance and meaning of the symbols on the label: please refer to the instructions for the D55 flex appliance enclosed with the chosen model

ACCESSORIES:

Assembly of INTERNAL ACCESSORIES Angler/R2:

- ensure that the appliance is switched off and at room temperature.
- unscrew screws "A" and remove the frame of the appliance (pict. 1)
- remove the ring from the frame, insert the accessory and replace the ring (pict. 2).
- in the case of the lens "Elliptical beam lens" position it with the knurling facing the interior of the appliance (pict. 2) and rotate it to direct the beam.
- in the case of the "Anti-glare louvre", position it with the flaps facing the interior of the appliance (pict. 3) and rotate it to direct the beam. The ring must be upside down.

IMPORTANT: the Radial Diffuser Louvre accessory can be mounted only on LED versions with a narrow beam (NB) spread

- in the case of the "Radial Diffuser Louvre" remove the ring for internal accessories (which will not be replaced) and lock the raster on to the reflector as shown in picture 4
- reassemble the frame tightening the screws "A" (pict. 1)







Assembly of INTERNAL ACCESSORIES Angler/S2:

- ensure that the appliance is off and at room temperature
- unscrew the screws "A" and remove the frame of the appliance (pict.1)
- insert the accessory in the frame and screw the four support brackets to block it. (pict. 5)
- in the case of the "Elliptical beam lens" position it with the knurling facing the interior of the appliance and direct it as necessary ($\pm 90^\circ$).
- in the case of the "Anti-glare louvre", screw it directly on to the frame, with the flaps facing the interior of the appliance and directed as necessary ($\pm 90^\circ$). (pict. 6)

IMPORTANT: the Radial Diffuser Louvre accessory can only be mounted on LED versions with a narrow beam (NB) spread

- lock the raster on to the reflector as in picture 4
- reassemble the frame tightening the screws "A" (pict. 1)

N.B.: It is possible to assemble only one of the internal accessories

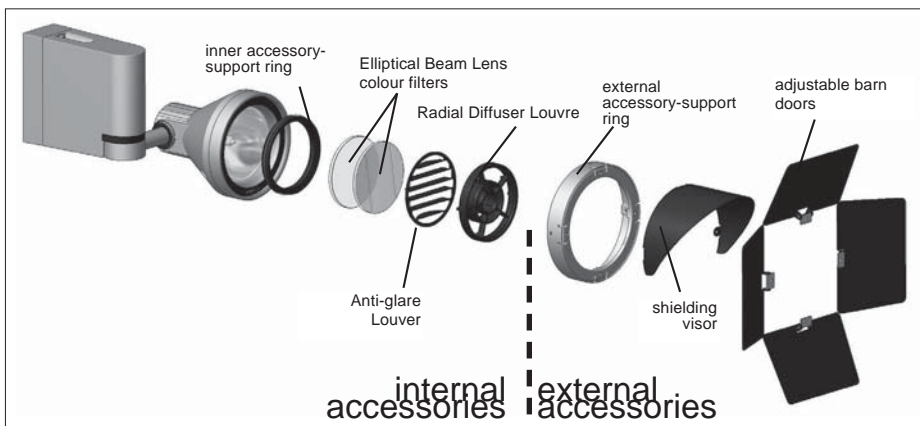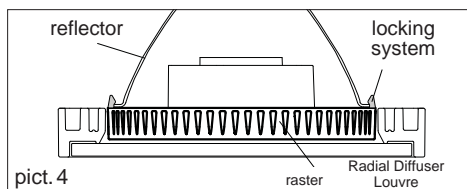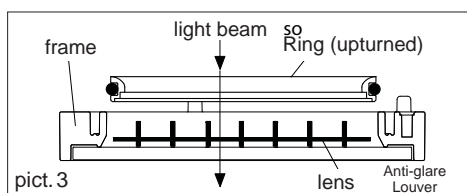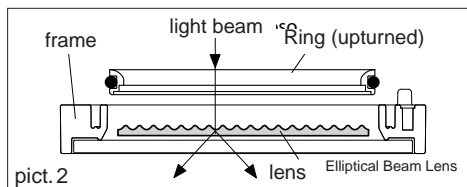

Assembly of EXTERNAL ACCESSORIES Angler/R2-S2:

- fix the external accessory-support ring on the frame, alternately tightening the 4 dowels "B" (pict. 7)
- for the louver flaps, tighten the screws "C" after having positioned the flaps (pict.8)





ASSEMBLIES:

Assembly of ARM (4069049):

- fix the arm to the wall using screw dowels with adequate resistance. (pict.9)
- slide the cable inside the arm and connect the appliance following the instructions enclosed with it.

Assembly on POST with JAW (4069050)

- position the jaw on the post at the point desired (pict.10)
- mark two holes to thread M6 to fix the jaw and a hole $\varnothing 20$ for the passage of the cable (use the washer supplied)
- continue installation as per the instructions of the appliance.

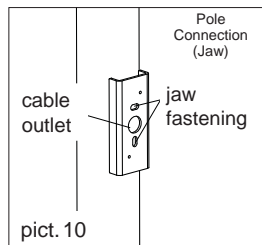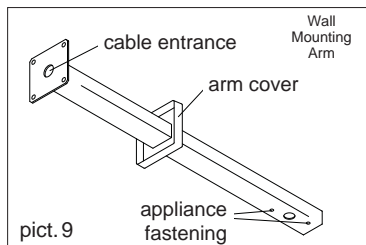

- surface exposed to the wind: 0.075m² (arm + appliance)
- max total weight: 4Kg
- field of installation up to 8m

Quality control: Should you have any complaint please get in touch with our company or its sales organization. Please give the number of your order as well as the serial number that recognizes the fixture.

MI/1777-C - 4^a ed