




(fig.1)

**(fig.1-2)**

Open the appliance by completely unscrewing the body/frame locking screws. Position the hood as shown in the figures (1-2), replace the screws in the frame and then proceed with closing the appliance by retightening the screws.

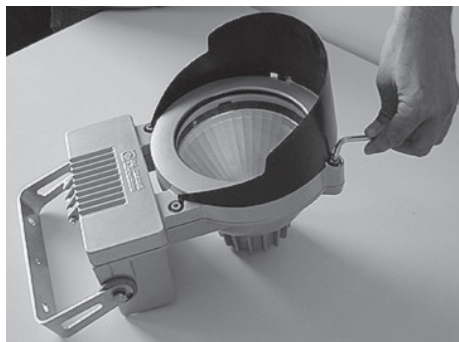

(fig.2)

Specifications are subject to change without notice!

Quality control: In case of complaint please get in touch with our company or its sales organization. Please give the number of your order as well as the serial number that recognizes the fixture.




(fig.1)

**(fig.1-2)**

Ouvrir l'appareil en dévissant complètement les vis de serrage du corps/châssis.

Placer la visière comme indiqué sur les figures (1-2), réintroduire les vis dans le châssis, fermer ensuite l'appareil en revissant les vis.

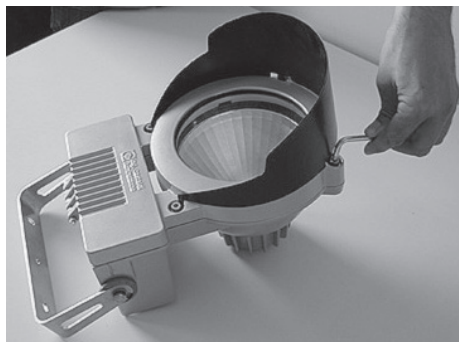

(fig.2)

Sous réserve de modifications des spécifications techniques!

Contrôle qualité: pour toute réclamation, nous vous prions de bien vouloir contacter notre société ou notre organisation de vente, en citant le numéro de commande et le numéro qui contremarque l'appareil.