


Disconnect from mains supply before replacing the fuse or the lamp.
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
 Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
 Abschalten
Débrancher
 Desconectar
Uitschakelen
 Stäng av

This luminaire is suitable for interior wall installation.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off mains electrical supply before installation.

Installation Procedure

Lift out reflector (L) and detach earth lead (K).

Unscrew and remove retaining nut (J) and mounting bracket (E).

Prepare suitable fixings in mounting surface at 100mm centres for mounting bracket (E).

Pass mains supply leads/cable through grommet in mounting bracket (E).

Secure bracket in position on mounting surface using suitable round headed screws, ensuring bracket is horizontal.

Cover mains supply leads with heat resistant sleeving and pass leads/cable through entry hole in housing (G).

Locate housing (G) on mounting bracket (E) and secure in position with retaining nut (J).

Ensure triangle is installed horizontally, any tilt can be corrected by adjustment of tilt nut (D).

Connect mains supply leads in respectively marked terminals in fused terminal block (B).

NOTE: Ensure voltage tapping lead (C) is connected to appropriate voltage terminal in ballast.

Connect earth lead (K) to earth tag on reflector (L).

Locate reflector (L) in position.


Insert appropriate lamp as indicated on label (F) in lampholders.
 NOTE: Do not handle lamp with bare fingers.

Place glass diffuser (A) in position on housing (G).

WARNING: This luminaire must be earthed.

NOTE: This luminaire should be cleaned using warm soapy water and a soft cloth. Ensure luminaire is switched off during cleaning.

Dispose of lamps in accordance with lamp manufacturer's instructions.

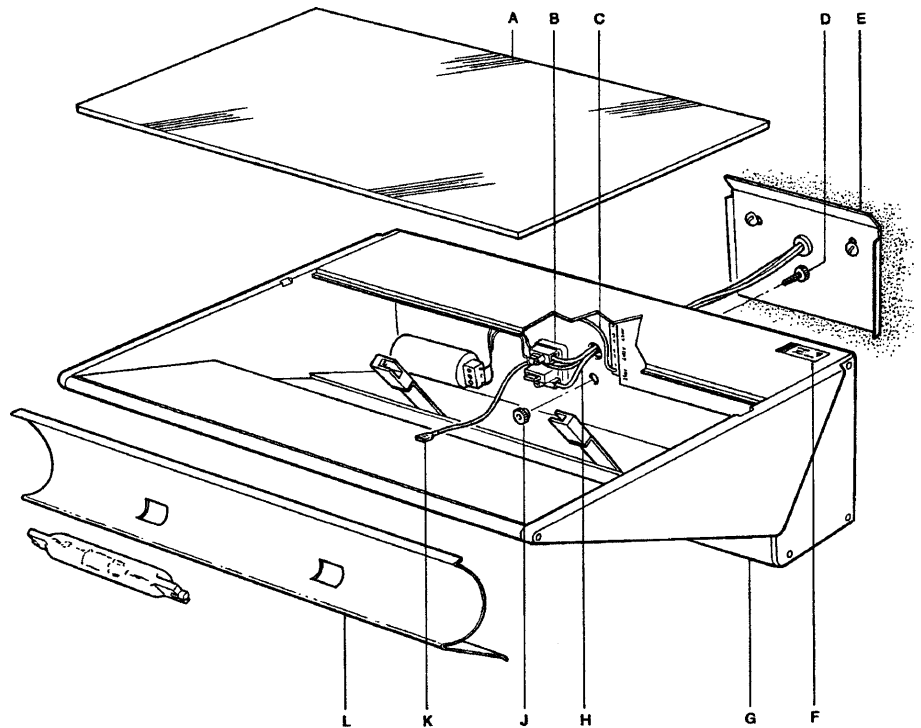

Suitable for use indoors

Geeignet für Innenanwendung

Pour un usage interne

Adecuada para uso en interiores

Geschikt voor gebruik binnen

Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbole indique que vous devez remplacer tout verre de protection fêlé.

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetsglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasias vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product
MUST be recycled.



03.08

Concord

Avis Way Newhaven East Sussex BN9 0ED
 T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com

