


4143565 4148444 4158265 4148443 4161276  
 4163508 4162492 4041161 4041162 4041163  
 4043686 4043687 4043688 4048440 4051669  
 4062886 4143564 4144014 4144015 4148437  
 4148438 4148439 4148442 4148445 4148446  
 4156874 4156875 4156876 4160335 4163054  
 4163055 4163057 4163083 4163507 4163529  
 4164618 4164971 4165036 4165178 4165206  
 4165207 4165208 4165209 4165210 4165364  
 4165426 4165574 4166083

**Disconnect from mains supply before replacing the fuse or the lamp.**  
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
 Koppla bort spänningen före byte av en säkring eller en lampa.



**Switch Off**  
 Abschalten  
**Débrancher**  
 Desconectar  
**Uitschakelen**  
 Stäng av

This luminaire is suitable for interior wall or ceiling mounting.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off mains electrical supply before commencing installation.

**Installation Procedure**

Check that mains supply conforms with rating marked on label (B).

Prepare suitable fixings in mounting surface at 210mm centres and partially screw in suitable round headed screws.  
 NOTE: Gallery (A) is marked 'TOP' for wall mounting.

Pass mains supply leads and loop in/out leads (if applicable) through grommet (F) into gallery (A).

Locate gallery mounting holes over fixing screws, insert slip washers (E) under screw heads and tighten screws.

Connect supply leads and earth lead in respectively marked terminals in terminal block (H).


Insert appropriate lamps as indicated on label (B) in lampholders and support clips (G).

Locate retaining clips of diffuser/trim (D) in gallery cut-outs (C) and rotate diffuser/trim clockwise to engage.

**WARNING: This luminaire must be earthed.**

**NOTE: Luminaire should be cleaned using warm soapy water and a soft cloth. Ensure luminaire is switched off during cleaning.**

Dispose of lamps in accordance with lamp manufacturer's instructions.

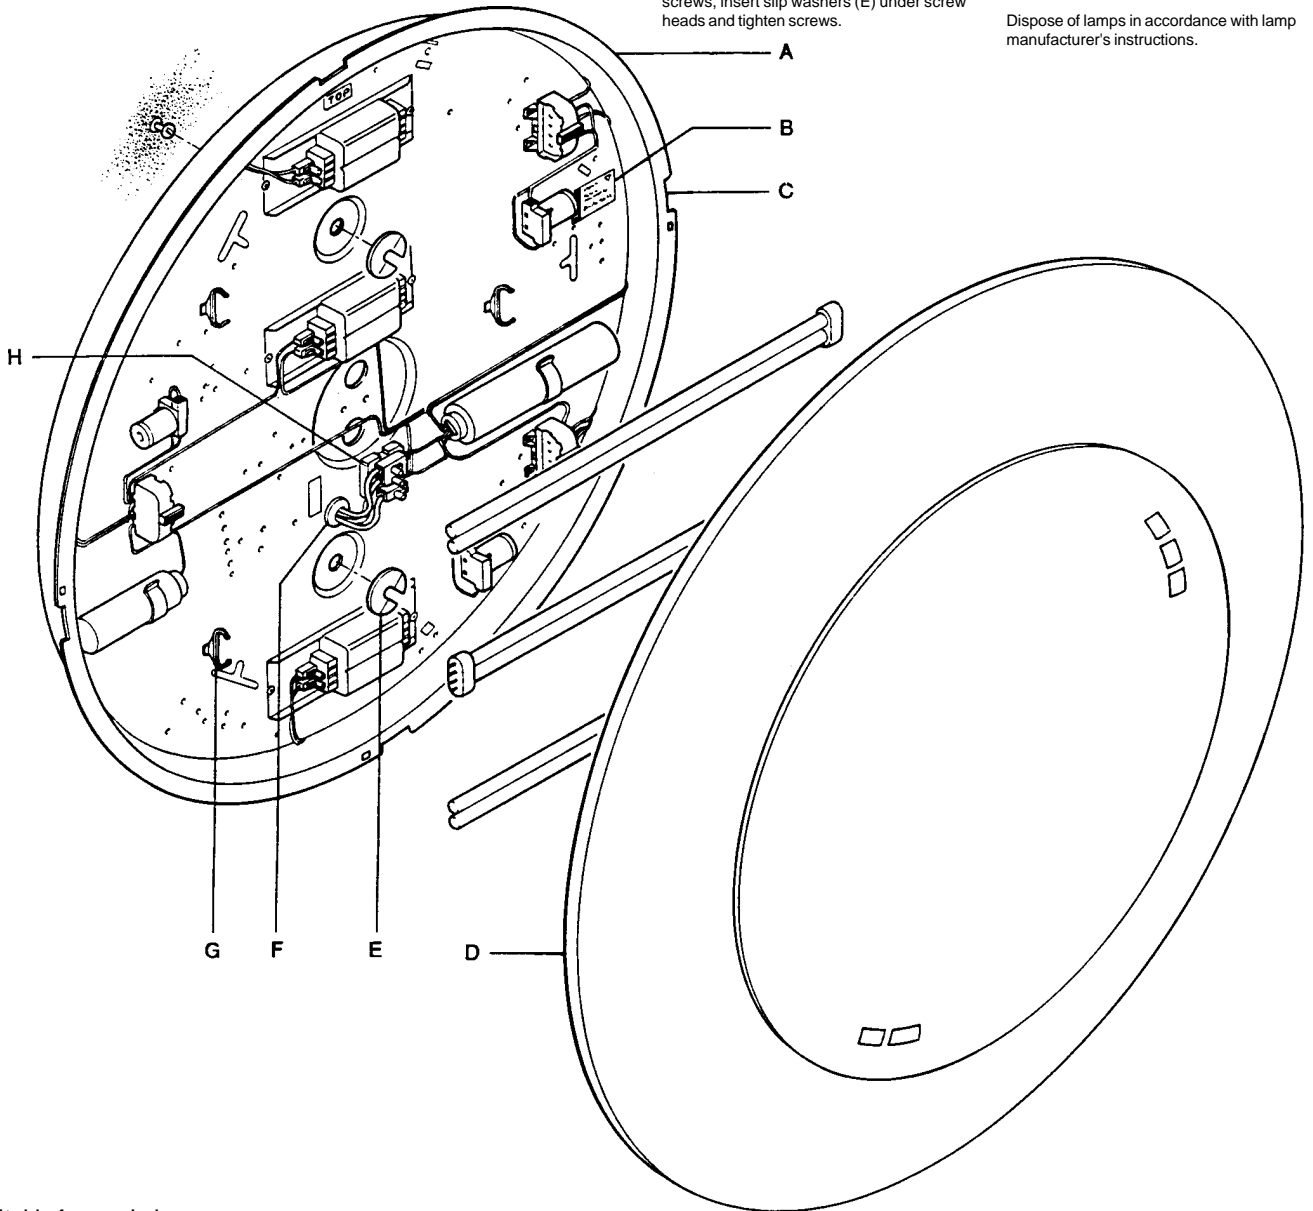

**Suitable for use indoors**  
 Geeignet für Innenanwendung  
**Pour un usage interne**  
 Adecuada para uso en interiores  
**Geschikt voor gebruik binnen**  
 Lämplig för inomhusbruk



**Replace any cracked protective shield.**

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

**Ce symbole indique que vous devez remplacer tout verre de protection fêlé.**

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.



**Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetsglass må skiftes.**

Valaisinta ei saa käyttää ilman suojalasina vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product **MUST** be recycled.



03.08