

Emergency Symbol

Single Lamp
28W TC-DD
38W TC-DD
26W TC-D


Installation Instructions
IS500




This Product
MUST be EARTHED

IS5347

Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

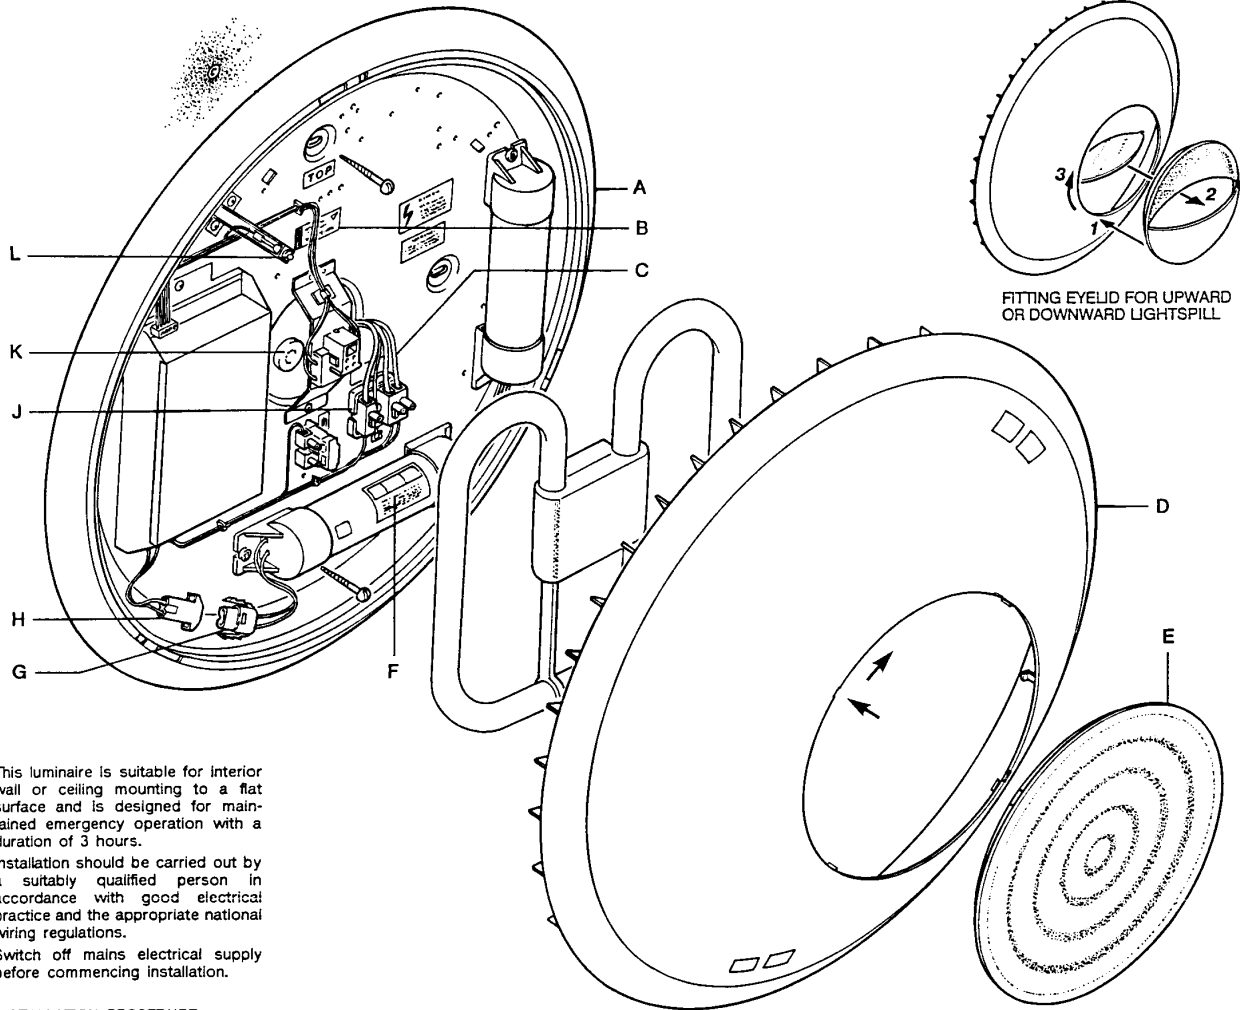

This luminaire is suitable for interior wall or ceiling mounting to a flat surface and is designed for maintained emergency operation with a duration of 3 hours.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off mains electrical supply before commencing installation.

INSTALLATION PROCEDURE

Rotate diffuser (D) anti-clockwise and remove.

Check rating marked on label (B) conforms with mains electrical supply.

SM Series - Prepare suitable fixings in mounting surface at 275mm or 200mm centres.

SL Series - Partially screw suitable round headed screws in mounting surface at 310mm centres.

NOTE: For wall mounted applications gallery (A) is marked TOP.

Enter supply connection date on battery pack label (F).

Fit supplied grommets (K) in gallery, and pass mains supply leads and unswitched live lead through grommets.

SM Series - Secure gallery (A) to mounting surface using suitable fixing screws.

SL Series - Locate gallery mounting holes over fixing screw heads, insert slip washers under screw heads and tighten screws.

Cover mains and unswitched live mains supply leads with supplied silicone sleeving (C) and connect leads in respectively marked terminals in terminal block (J).

Fit appropriate lamp as indicated on label (B) by pushing it firmly in lampholder.

Connect socket (G) to plug (H).

If applicable, locate Fresnel Lens (E) in diffuser and rotate to lock.

Eyelid fitting (if applicable)

NOTE: Diffuser is marked TOP.

1. Determine if upward or downward lightspill is required and place eyelid in diffuser.

2. Insert baffle in eyelid slot.

3. Rotate eyelid to lock.

Locate diffuser (D) on gallery and rotate to lock.

WARNING:
LUMINAIRE MUST BE EARTHED.
DO NOT INSULATION TEST.
DO NOT MODIFY LUMINAIRE.

WARNING: DO NOT SWITCH OFF LUMINAIRE AFTER INSTALLATION, AS UNSWITCHED SUPPLY MUST BE MAINTAINED.

IF INTERRUPTION TO THE SUPPLY IS UNAVOIDABLE, THE BATTERIES MUST BE DISCONNECTED OR DAMAGE MAY RESULT.


NOTE: TO CLEAN LUMINAIRE, USE WARM SOAPY WATER AND A SOFT CLOTH TAKING CARE NOT TO DISLODGE COMPONENTS.
ENSURE LUMINAIRE IS SWITCHED OFF DURING CLEANING.

DISPOSE OF LAMPS IN ACCORDANCE WITH LAMP MANUFACTURER'S INSTRUCTIONS.

TESTING

Switch on mains supply and check that charge indicator lamp (L) is on. Leave luminaire on continuous charge for 24 hours.

Simulate mains failure, and check that lamp operates for 3 hours. If full duration of 3 hours is not achieved, repeat charge/discharge cycle as battery packs may have discharged in stock and will require conditioning.



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbol indique que vous devez remplacer tout verre de protection fêlé.

Este símbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

Suitable for use indoors
Geeignet für Innenanwendung
Pour un usage interne
Adecuada para uso en interiores
Geschikt voor gebruik binnen
Lämplig för inomhusbruk



This Electrical Product
MUST be recycled.



06.06

< Millimetres >

Concord:marlin

Avis Way Newhaven East Sussex BN9 0ED
T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com



© Concord Lighting Ltd.