



Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

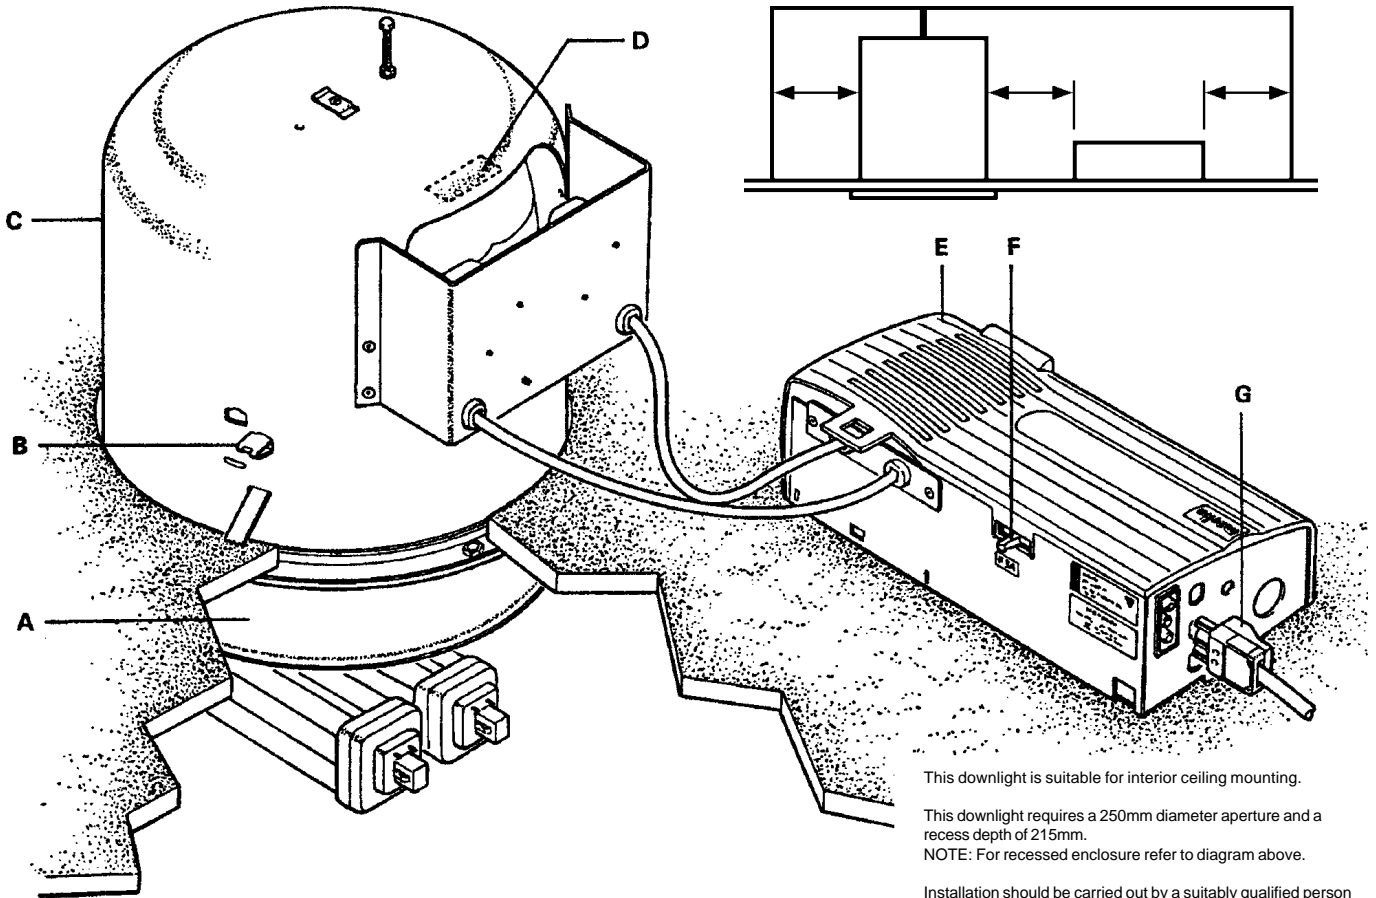

This downlight is suitable for interior ceiling mounting.

This downlight requires a 250mm diameter aperture and a recess depth of 215mm.

NOTE: For recessed enclosure refer to diagram above.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

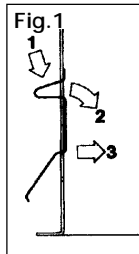


Fig. 1
Ceiling Thickness (mm)
5 - 16
16 - 31

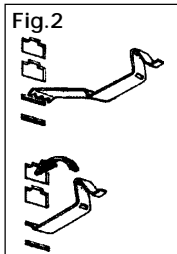


Fig. 2
Fixing Slot
Bottom
Top




Fig. 3




Fig. 4

To avoid flexing of sheet metal tile use a 5mm backing board.

Switch off mains electrical supply before installation.

Use supplied polythene glove when handling reflector and lamps.

Installation Procedure

Prepare aperture in mounting surface.

Remove reflector (A) and check rating marked on label (D) conforms with mains electrical supply.

Remove mounting clips (B) from housing (C) as shown in Fig. 1.

Remove plug (G) from gear unit (E) and connect switched mains supply to plug as shown in Fig. 3.

Insert plug in gear unit socket.

Place remote box (E) through ceiling aperture.

Refer to table on left and secure housing (C) in ceiling aperture with mounting clips (B) as shown in Fig. 2.

Fit reflector (A) in housing (C), ensuring that rubber is positioned on end of screw as shown in Fig. 4.

Fit supplied lamps.

NOTE: Luminaire is protected by a 3A fuse (F).

WARNING: Luminaire must be earthed.

WARNING: Do not insulation test.

NOTE: This luminaire should be cleaned using warm soapy water and a soft cloth - ensure luminaire is switched off during cleaning.

Dispose of lamps in accordance with manufacturer's instructions.

Suitable for use indoors
Geeignet für Innenanwendung
Pour un usage interne
Adecuada para uso en interiores
Geschikt voor gebruik binnen
Lämplig för inomhusbruk



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbole indique que vous devez remplacer tout verre de protection fêlé.

Este simbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product **MUST** be recycled.



02.08