

DALI Push-Up Live Feeds




These products must be Earthed

IS1443

2051485
2051486
2051487
2051488
2051489
2051490


For DALI Luminaires ONLY fitted with DALI adaptors.

Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.




Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

Lytespan 3
Lytespan 3 Flanged
Lytebeam

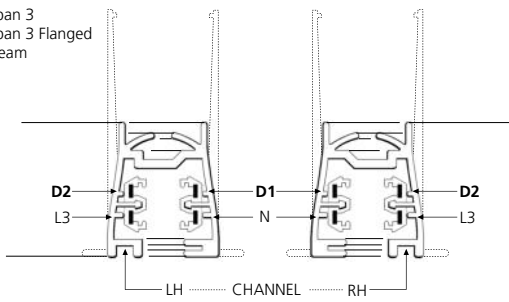


⚡ 400V = 3 x 3680W = 11040W Max.
⚡ 415V = 3 x 3840W = 11520W Max

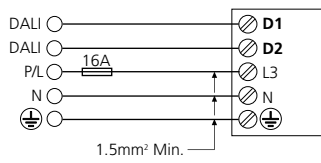


There can be no closed rings in the wiring and the maximum distance between the gateway and the DALI unit is 300 m.

Lead Length	Minimum Lead Diameter
up to 100 meters	0.5mm ²
100-150 meters	0.75mm ²
above 150 meters	1.5mm ²




The maximum lead length between two connected systems must not exceed 300 meters.

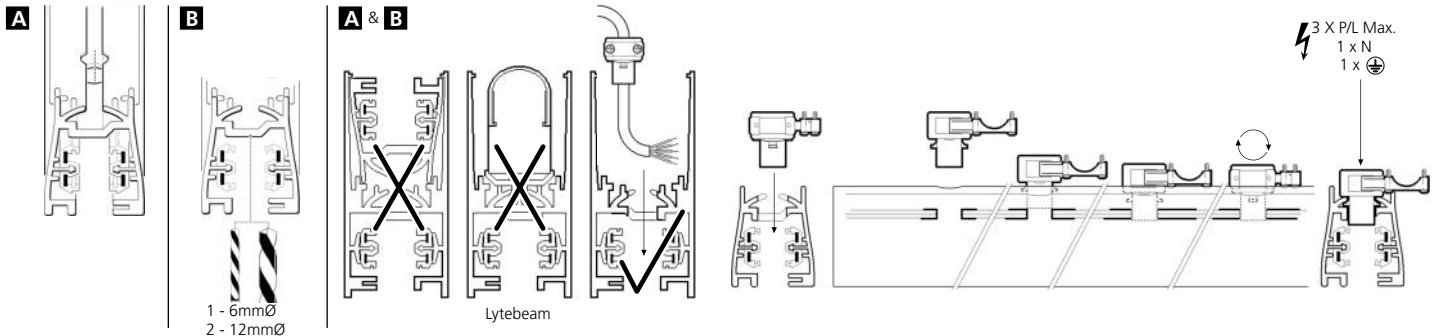



1 LH - 2051488 2051489 2051490

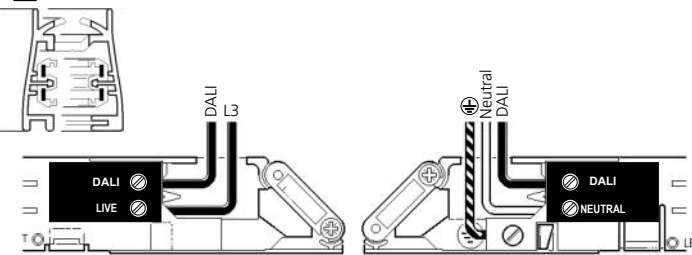

1 RH - 2051485 2051486 2051487

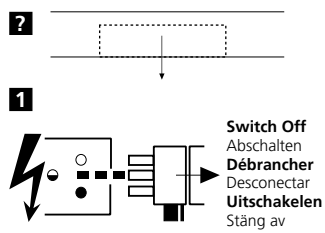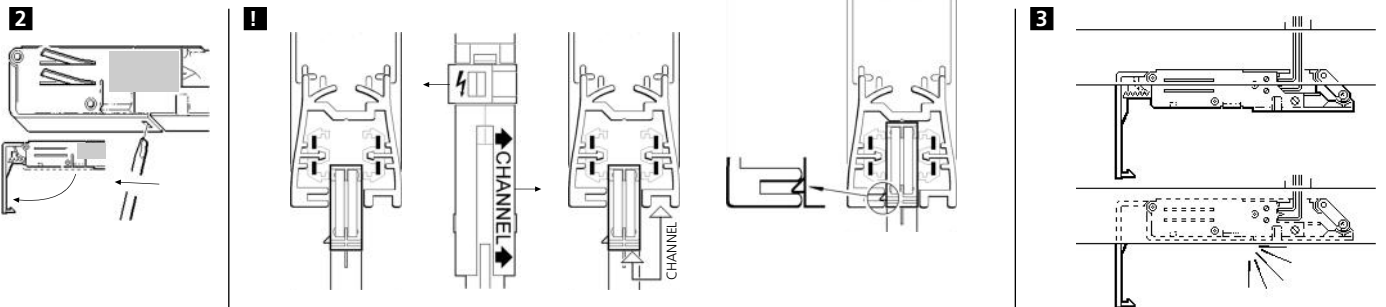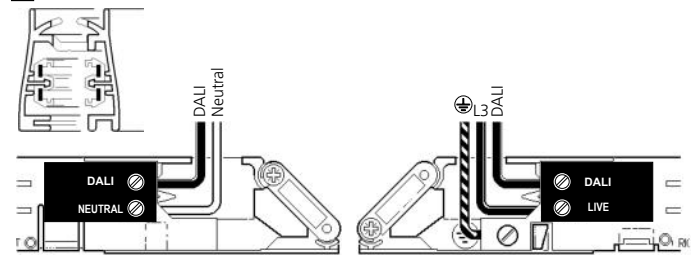


Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

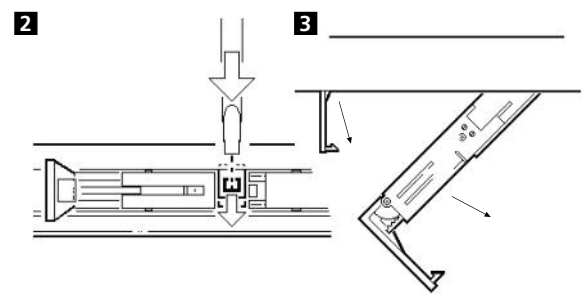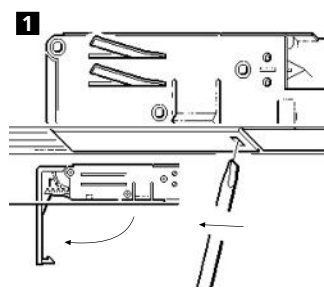

Suitable for use indoors
Geegnet für Innenanwendung
Pour un usage interne
Adecuada para uso en interiores
Geschild voor gebruik binnen
Lämpig för inomhusbruk

DO NOT INSULATION TEST WITH SPOTLIGHTS INSTALLED ON THESE TRACKS!



Concord

Avis Way Newhaven East Sussex BN9 0ED
T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com
www.havells-sylvania.com

Concord Lighting Limited
09.11