




These products must be Earthed

DO NOT INSULATION TEST WITH SPOTLIGHTS INSTALLED ON THIS TRACK




RH - Right Hand
LH - Left Hand
LI - Live Inside
LO - Live Outside


Disconnect from mains supply before replacing the fuse or the lamp.
Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
Abschalten
Débrancher
Desconectar
Uitschakelen
Stäng av

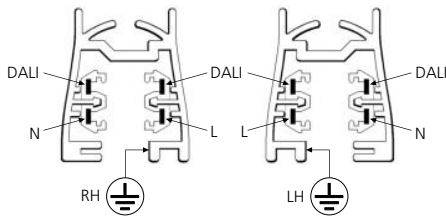

230-240V~




* There can be no closed rings in the wiring and the maximum distance between the gateway and the DALI unit is 300 m.

Lead Length	Minimum Lead Diameter
up to 100 meters	0.5mm ²
100-150 meters	0.75mm ²
above 150 meters	1.5mm ²


The maximum lead length between two connected systems must not exceed 300 meters.

For DALI Luminaires ONLY fitted with DALI adaptors.


1 Live-End




2




3




4




5




L, T & X Couplers*

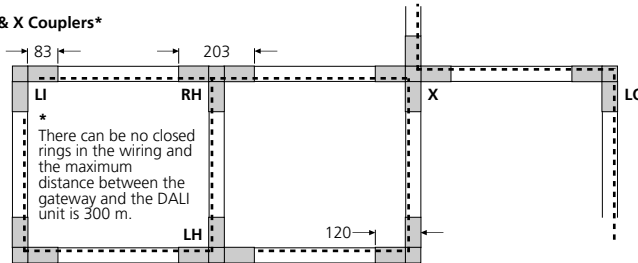


1




2




3




End Cap




Covers

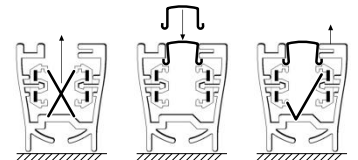


1

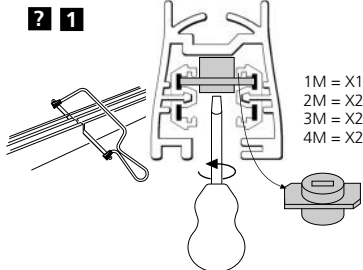


2




3




4




5




6



7



8



Suitable for use indoors
Geeignet für Innenanwendung
Pour un usage interne
Adecuada para uso en interiores
Geschikt voor gebruik binnen
Lämplig för inomhusbruk

