

INSTALLATION INSTRUCTIONS


Low Energy Dual Voltage Bathroom Shaverlight Cat No. S6000LE

IS5769

PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE COMMENCING INSTALLATION

SAFETY

Follow the appropriate national wiring regulation. If in Doubt contact a qualified Electrician.



Disconnect from mains supply before Installation, maintenance or lamp replacement.

Lamps reach maximum temperatures rapidly. Take care when adjusting, re-lamping or cleaning.
 Rexel Senate accepts no responsibility for modified products or for the effects of cleaning solvents for the accumulation of dust or dirt.

Do not interconnect Class III products with Class I or Class II.
 This product is suitable for use in ambient temperatures of 25°C.
 Unless otherwise marked the product is IP20 (Ordinary).

This product should not be covered with any heat resistant material, air flow around the fitting should not be restricted.

Note minimum distances to adjacent surfaces - see below.

Any enclosure which prevent normal heat dissipation may cause reduced performance, overheating and risk of fire.

This product is designed for **SHAVERS ONLY**.

This product should be connected to the lighting circuit or fused at a maximum of 5A.
 Do not use a dimmer switch.

This product has a transformer giving a shaver socket outlet of 240V (single voltage) or, 240V or 115V (dual voltage) up to a maximum power consumption of 20VA. A fitted solid state overload device will render socket inoperable should the maximum load be exceeded. If this should occur, switch off mains supply and remove plug from shaver socket. The protection device will reset itself after a short time.

After completion of installation, note suppliers name, address and purchase date and hand this leaflet to the person responsible for lighting maintenance for future reference.

In case of queries contact supplier.

The following symbols may be found on the product or labels:



Class 1 - This fitting must be Earthed and equipotentially bonded.




This fitting is suitable for mounting on normally flammable surfaces.



Indicates the safest minimum distance of lamp from a flammable surface.


Throughout these instructions the following coding may be used:

Line - L	Brown or Red
Neutral - N	Blue or Black
Earth - Ⓧ	Green/Yellow or bare conductor

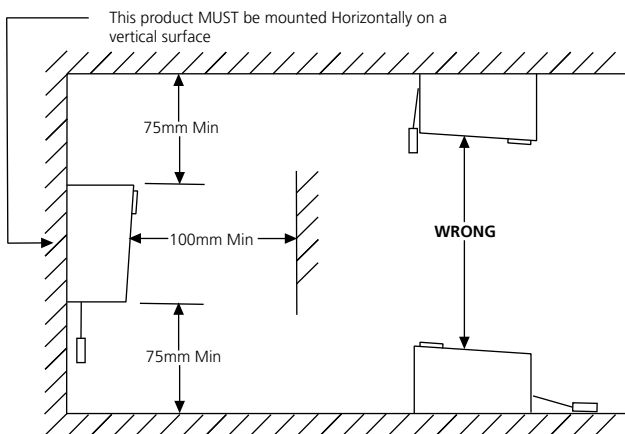


F Do not cover or use as a shelf.


1

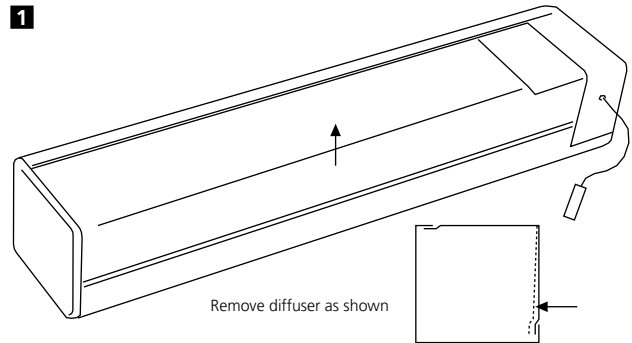

2

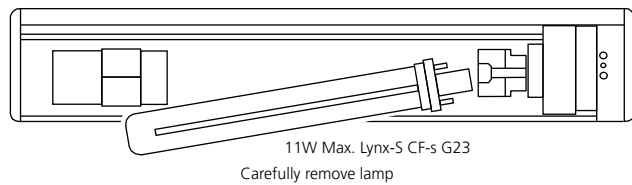


3

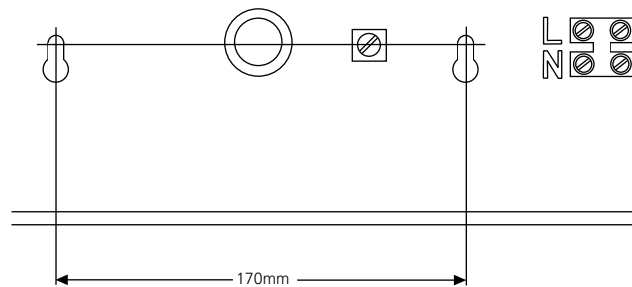

4

230-240V Max
 3 x 1.5mm² Min.
 L, N, Ⓧ

5

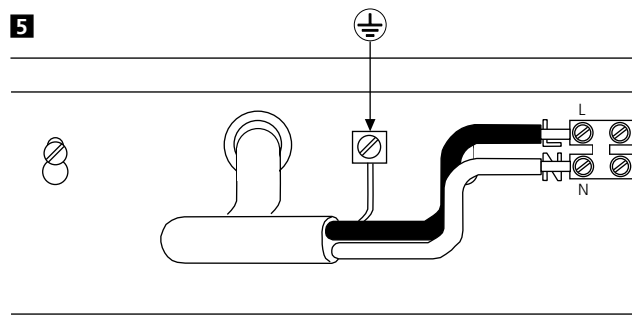

Connect cables, replace lamp and diffuser