



Disconnect from mains supply before replacing the fuse or the lamp.
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
 Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
 Abschalten
Débrancher
 Desconectar
Uitschakelen
 Stäng av



Fitting Diffuser

1. Flex in.
2. Insert under rim.
3. Centralise.

Installation Procedure

Carefully remove diffuser (B) as shown.

Check rating marking on label (G) conforms with electrical supply.

Partially screw suitable round headed screws in mounting surface at 210mm centres.

NOTE: Gallery (A) is marked 'TOP' if wall mounting.

Fit supplied grommets in gallery.

Pass mains supply leads through grommet.

Locate gallery mounting holes over fixing screw heads, insert slip washers (F) under screw heads and tighten screws.



Cover line and neutral mains supply leads with supplied silicone sleeving and connect leads in respectively marked terminals in terminal block (E).

Fit appropriate lamp as indicated on label (G) by pushing it firmly into lampholder.

Fit diffuser (B) in gallery rim as shown, ensuring it is held concentrically by retaining clips (C).

NOTE: Luminaire is protected by a 3A fuse (D).

NOTE: Luminaire can be semi-recessed using Recessing Kit - Catalogue no 4037858.

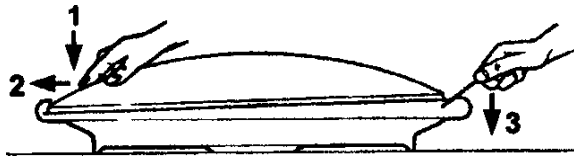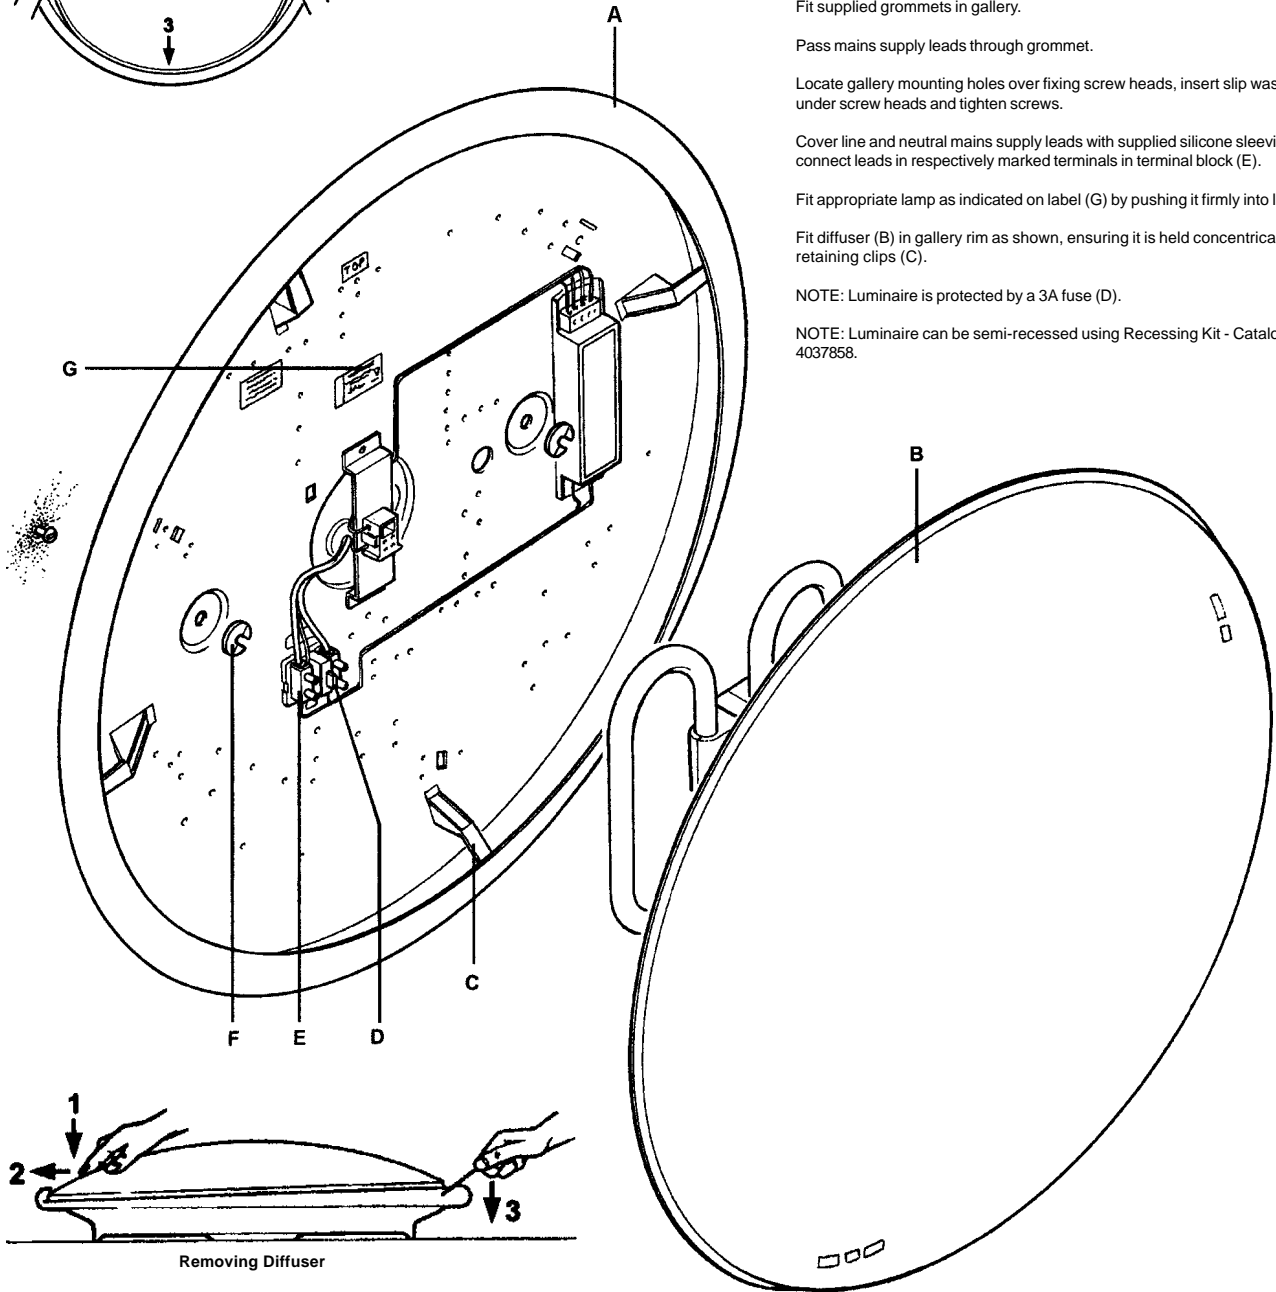

Removing Diffuser

1. Press down.
2. Push to side.
3. Lever out.



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbole indique que vous devez remplacer tout verre de protection fêlé.

Este símbolo indica que hay que 'reemplazar filtros en caso de rotura o desperfectos'.



Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product
MUST be recycled.



11.07