


Disconnect from mains supply before replacing the fuse or the lamp.
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
 Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
 Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
 Koppla bort spänningen före byte av en säkring eller en lampa.



Switch off
 Abschalten
 Débrancher
 Desconectar
 Uitschakelen
 Släng av



This ceiling ring has been designed to facilitate the installation and removal of the Sextant Downlight when installed in a metal tile, a softboard tile or plasterboard.

The ceiling ring should be used in conjunction with a backing board (not supplied) when installing in a metal tile or a softfibre tile as shown in diagram.

INSTALLATION PROCEDURE

Prepare a 210 /212mm diameter hole in mounting surface and insert ceiling ring. NOTE: If installing in a metal tile, insert ring and rotate to retain ring in aperture.

Install downlight as described in Installation Instruction Leaflet supplied with downlight.

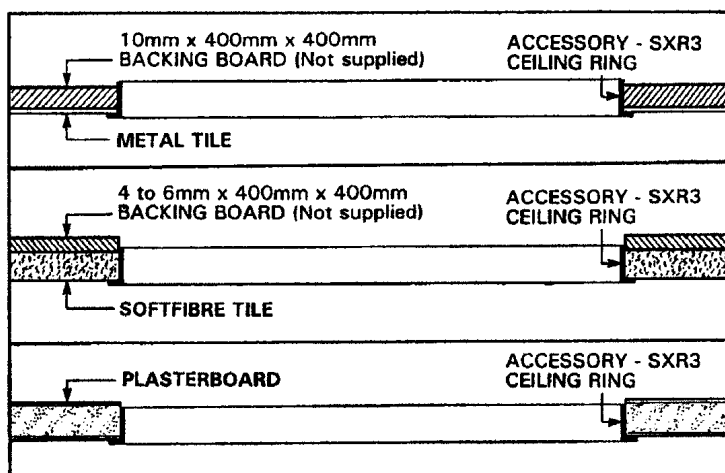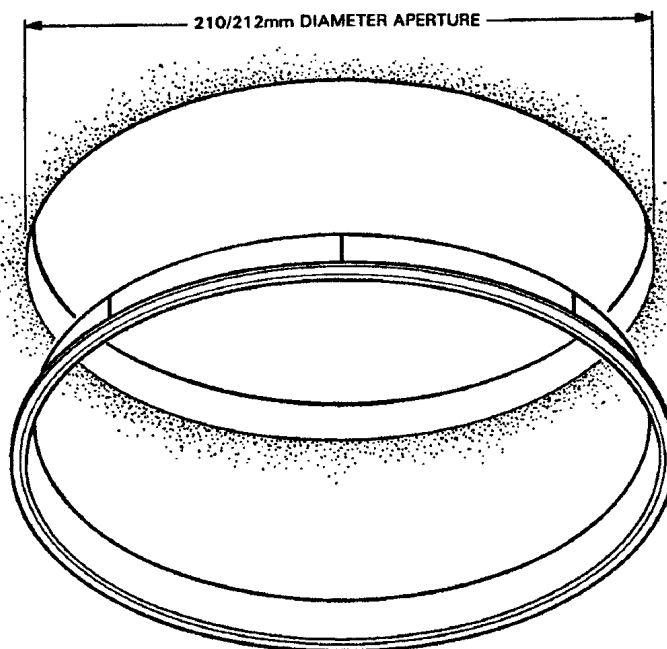

Suitable for use indoors
 Geeignet für Innenanwendung
 Pour un usage Interne

Adecuada para uso en interiores
 Geschikt voor gebruik binnen
 Lämpig för Inomhusbruk

This Electrical Product
 MUST be recycled.



Concord:marlin

Avis Way Newhaven East Sussex BN9 0ED
 T 0870 606 2030 F 01273 512 688 email: information@concordmarlin.com



PM 1587
 © Concord Lighting Ltd.