


INSTALLATION INSTRUCTIONS

FCW340 / FCW440 PL-Q

This luminaire is suitable for ceiling or wall mounting in interior situations.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations

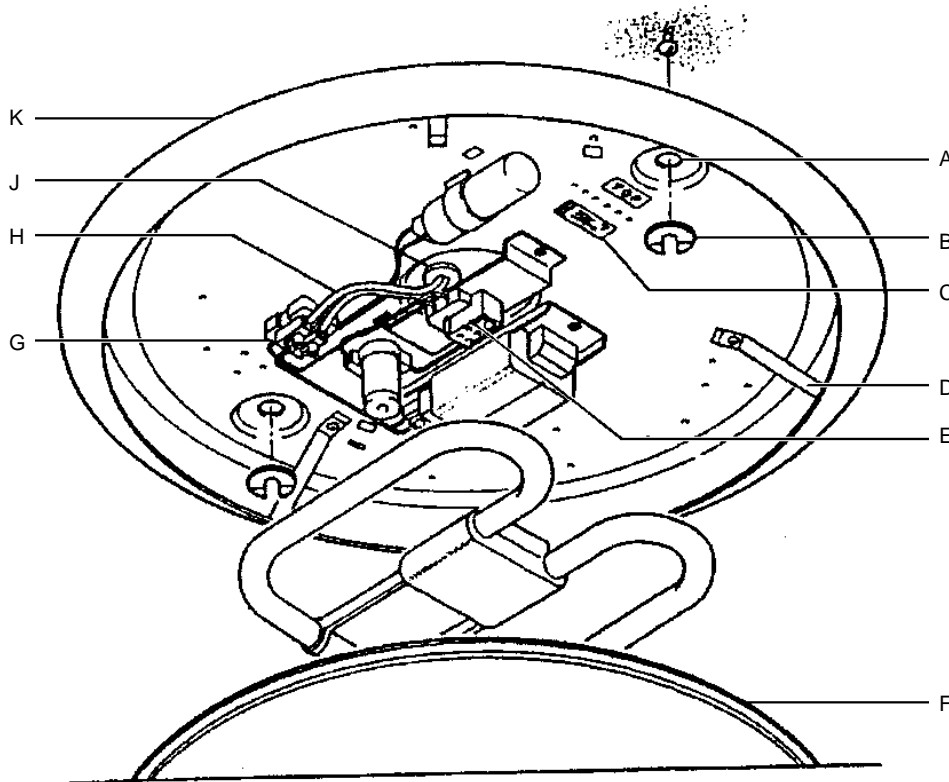

Installation Procedure

Carefully lever out diffuser (F).

Check rating marked on label (C) conforms with mains electrical supply.

Partially screw suitable round headed screws into mounting surface 310mm centres.

Note: For wall mounted applications gallery (K) is marked TOP.

Fit grommets (J) supplied in gallery.

Pass mains supply cable through grommet (J).

Locate gallery mounting holes (A) over fixing screw heads. Insert slip washers under screw heads and tighten screws.

Cover mains supply leads with silicone sleeving (H) supplied and connect to their respective terminals in terminal block.

Fit appropriate lamp as indicated on label (C) by pushing it firmly into lampholder.

Ease diffuser (F) into gallery rim ensuring it is held concentrically by the three retaining clips (D).


WARNING

This luminaire must be earthed.


WARNING

Do not insulation test.

Note: This luminaire should be cleaned by using a soft, damp, soapy cloth - ensure luminaire is switched off during cleaning

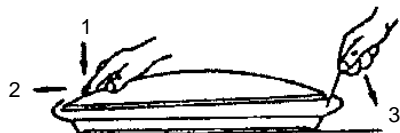

Removing Diffuser
1 Press down 2 Push to side 3 Lever out

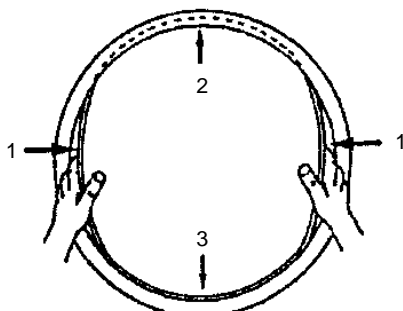

Fitting Diffuser
1 Flex in 2 Insert under rim 3 Centralise

CE This product is manufactured to comply with the following EEC Directives as applicable.
EMC Directive 89/336/EEC
LV Directive 73/23/EEC



Products offered for sale may differ from those described or illustrated in this leaflet due to later production changes in specifications, components or place of manufacture. The contents of this leaflet are therefore not to be treated as representations as to the current availability of products as described, or as to products actually offered for sale.