


INSTALLATION INSTRUCTIONS

FCS440


WARNING: LUMINAIRE MUST BE EARTHED.

NOTE: THIS LUMINAIRE SHOULD BE CLEANED BY USING WARM SOAPY WATER AND A SOFT CLOTH - ENSURE LUMINAIRE IS SWITCHED OFF DURING CLEANING.

DISPOSE OF LAMPS IN ACCORDANCE WITH LAMP MANUFACTURERS INSTRUCTIONS.

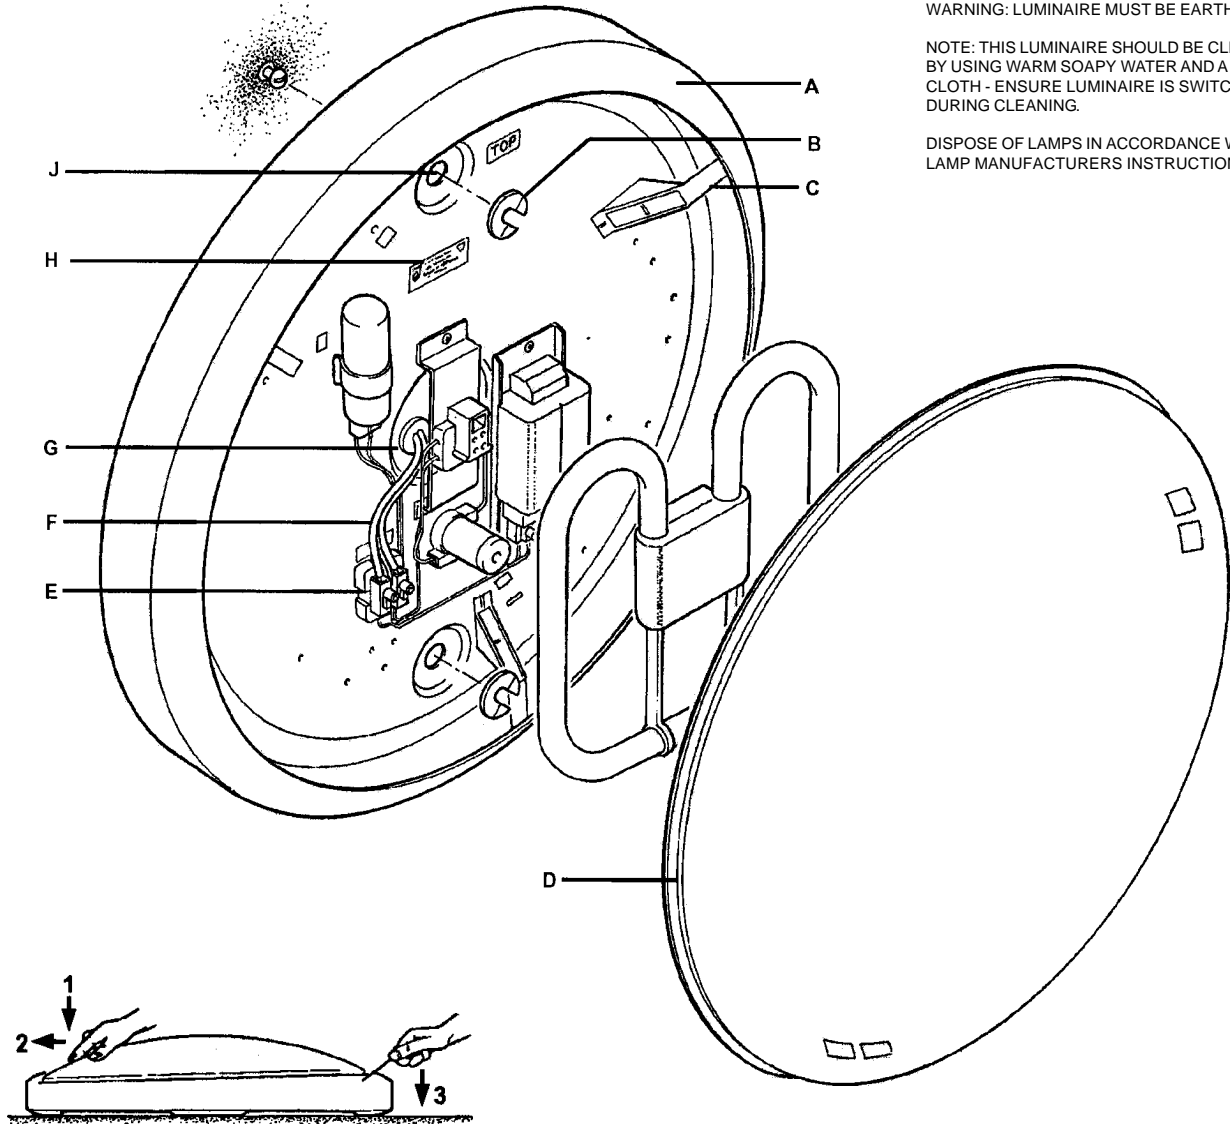

Removing Diffuser
1. Press Down 2. Push to Side 3. Lever Out

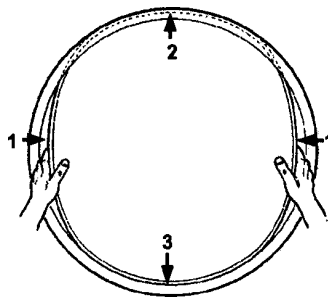

Fitting Diffuser
1. Flex In 2. Insert Under Rim 3. Centralise

This luminaire is suitable for interior wall or ceiling mounting to a 50.8mm conduit box or directly to mounting surface.

Installation should be carried out by a suitably qualified person in accordance with good electrical practise and the appropriate national wiring regulations.

Switch off mains electrical supply before commencing installation.

INSTALLATION PROCEEDURE

Carefully remove diffuser (D) as shown.

Check rating marked on label (H) conforms with mains electrical supply.

Partially screw M4 screws in conduit box lugs or prepare suitable fixings in mounting surface at 310mm for outrigger holes (J).

NOTE: For wall mounted applications gallery (A) is marked 'TOP'

Fit supplied grommets (G) in gallery.

Pass mains supply leads through grommet.

Secure gallery (A) to conduit box or to mounting surface using suitable round headed screws through the outrigger holes (J).

Cover line and neutral mains supply leads with supplied silicone sleeving (F) and connect supply leads and earth lead in respectively marked terminals in terminal block (E).

Fit appropriate lamp as indicated on label (H) by pushing it firmly into lampholder.

Fit diffuser (D) in gallery rim as shown ensuring it is held concentrically by retaining clips (C).



CE This product is manufactured to comply with the following EEC Directives as applicable
EMC Directive 89/336/EEC
LV Directive 73/23/EEC