


Installation Instructions for: **2526555 2526556 2526557 2526558 2526559 2526560 2526562 2526563 2526728**

**Safety**

Follow the appropriate national wiring regulations. If in any doubt contact a qualified Electrician.

 **Disconnect from mains supply before installation, maintenance or replacing the lamp.**

**This product and the lamp reach maximum temperatures rapidly. Take care when adjusting, relamping or cleaning.**

SLI Lighting accepts no responsibility for modified products, or for the affects of cleaning solvents, or for the accumulation of dust or dirt.

Do not interconnect Class III products with Class I or Class II.

Unless otherwise marked, products are IP20 (ordinary). Do not use in damp or corrosive situations.

All products are suitable for use in ambient temperatures of 25° C. Suitable for use indoors.


The product should not be covered with any heat insulating material, air flow around the fitting should not be restricted. Note minimum distances to adjacent surfaces.


Any enclosure which prevents normal heat dissipation around uplighters/downlighters, may cause reduced performance, overheating or risk of fire.


These products should be connected to the lighting circuit, or fused at a maximum of 5A. If a dimmer is installed it must be specifically rated as suitable for the equipment used.

After completing the installation note the suppliers name, address and purchase date and hand this leaflet to the person responsible for lighting maintenance for future reference.

The following symbols may be found on the product or labels:

 This fitting is suitable for mounting on normally flammable surfaces.

 Class II. Double insulated. This fitting must not be Earthed.

 Indicates the safest minimum distance of lamp from a flammable surface.

The product or the Instruction Sheet use the following coding:


L - (Line/Live) Brown or Red.

N - (Neutral) Blue or Black

Follow these instructions carefully to ensure safe and reliable operation. In case of any queries contact your supplier.



The Sylvania Hi-Spot lamp




50W HI-SPOT ES50 GU10  
OR  
75W HI-SPOT ES63 GU10

Insert lamp as shown, and replace cowl.  
**DO NOT** operate without cowl.

To remove cowl, hold base steady and pull upwards.

**Avoid placing the product directly onto fabrics eg. carpeted floors etc. and ensure that the product has been placed in a safe and secure position.**

**Keep out of reach of children.**

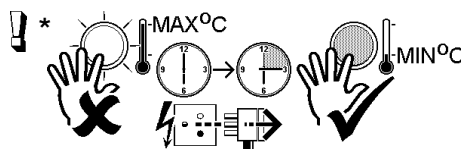

**Allow 15 minutes cooling down period**



This Electrical Product **MUST** be recycled.

