

## Sylvania Syl Line

Slimline Surface Luminaire

 **Luxline FHO** T16 49W G5 3950 lm  
**Luxline FHE** T16 28/35W G5 2640/3300 lm

SURFACE MOUNTED


- Shallow profile T5 surface fluorescent luminaire
- High frequency control gear mounted on a quick release removable gear tray
- Low profile sectional design allows for installation with minimal environmental impact
- High LOR of over 70%
- Ideal for schools and colleges



Surface


### Syl Line

Light source	Standard	Emergency
T5 1x28W	<b>9141557</b>	<b>2642505</b>
T5 2x28W	<b>9141560</b>	<b>2642508</b>
T5 1x35W	<b>9141558</b>	<b>2642506</b>
T5 2x35W	<b>9141561</b>	<b>2642461</b>
T5 1x49W	<b>9141559</b>	<b>2642507</b>
T5 2x49W	<b>9141562</b>	<b>2642463</b>

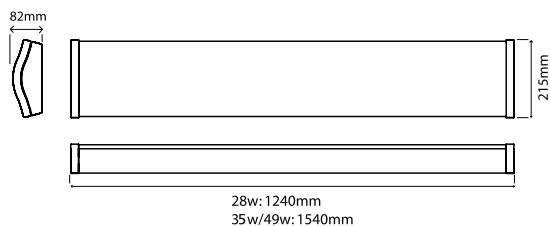

## Sylvania Syldust


IP 50

 **Luxline Plus** T26 18/36/58W G13  
1350/3350/5200 lm



SURFACE MOUNTED

- Decorative aspect
- Easy installation and maintenance



### Syldust Attachment

Light Source	A2 Ballasts	B2 Ballasts
T26 1x18W G13	<b>9090850</b>	<b>9090820</b>
T26 1x36W G13	<b>9090851</b>	<b>9090821</b>
T26 1x58W G13	<b>9090852</b>	<b>9090822</b>
T26 2x18W G13	<b>9090853</b>	<b>9090823</b>
T26 2x36W G13	<b>9090854</b>	<b>9090824</b>
T26 2x58W G13	<b>9090855</b>	<b>9090825</b>



### Syldust

Light Source	Opal	Prismatic
T26 1x18W G13	<b>9090830</b>	<b>9090840</b>
T26 1x36W G13	<b>9090831</b>	<b>9090841</b>
T26 1x58W G13	<b>9090832</b>	<b>9090842</b>
T26 2x18W G13	<b>9090833</b>	<b>9090843</b>
T26 2x36W G13	<b>9090834</b>	<b>9090844</b>
T26 2x58W G13	<b>9090835</b>	<b>9090845</b>

A2 Ballasts & Emergency versions available on request.  
Please ask your local representative.

### Dimensions (mm)

Lamp	L	B	E	Heaviest weight (kg)
1x18W	660	106	460	1.7
1x36W	1270	106	900	2.6
1x58W	1570	106	1200	3.5
2x18W	665	190	445	2.2
1x36W	1270	190	900	4.3
1x58W	1570	190	1200	5.7

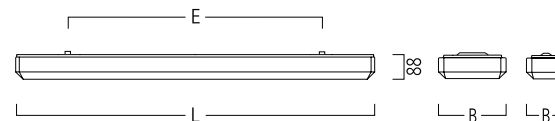

**Diffusers description**  
Trapezoidal opal PMMA diffusers. Trapezoidal transparent PMMA diffusers with prismatic texture. The materials used guarantee stable corners, resistance to ultraviolet light, and attractive design.



**Description**  
Back plate made of deep-drawn sheet steel, white stove-enamelled. Diffusers are secured by a plastic rotary toggle and sealed by foam plastic gasket. Two cable entries for through-wiring which can be led out of the luminaire without any problem.