

# Concord



## STERLING BULKHEAD LED G2

THE IDEAL 2D REPLACEMENT

Sterling Bulkhead is the ideal 2D bulkhead replacement. Featuring cutting edge LED technology for impressive energy savings, Sterling Bulkhead has simple lines and curves which ensures it blends in with any environment. Sterling Bulkhead is a robust luminaire range offering an excellent rating of IK10 and tamper proof screws for additional security. Sterling Bulkhead is ideal for interior and exterior applications such as stairwells, corridors and exterior walls.

Sterling Bulkhead is constructed of a die cast housing and polycarbonate diffusers providing perfect homogenous light distribution.

With an output up to 1,477 lumens (4,000K model) and an efficiency of up to 87lm/W, Sterling Bulkhead provides significant energy savings compared to traditional bulkheads. Sterling Bulkhead also offers the possibility to choose between high output or high efficiency with the simple flick of a switch depending upon your requirements.



[www.concord-lighting.com](http://www.concord-lighting.com)  
[www.feilosylvania.com](http://www.feilosylvania.com)

by **FEILO SYLVANIA**

## Sterling Bulkhead LED G2

### FEATURES

- A range of exterior LED bulkheads which offer significant energy savings compared to traditional 2D fixtures.
- Sterling Bulkhead LED is perfect for interior and exterior applications including residential and commercial entrance ways.
- Unique feature allowing a choice between High Output or High Efficiency with the flick of a switch
- Perfect homogenous light distribution
- Available in 3000K and 4000K in either Black or Silver colour
- Robust design meets IK10 requirements
- Hood, X bar and Grille accessories available for this range
- High performance: delivers up to 1,477 lm (luminaire lumen output on 4000K version), and up to 87lm/W (total system efficiency)
- High performance: delivers up to 1,325 lm (luminaire lumen output on 3000K version), and up to 78lm/W (total system efficiency)
- Energy class: A++, A+, A
- Long lifetime: 50,000 hours life at 70% of the original output L70




Code	Description	Body colour	Colour temperature (K)	Drive current (mA)	System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Lifetime (Hours)
<b>Sterling Bulkhead LED G2</b>								
<b>Sterling Bulkhead LED G2 4000K</b>								
4063835	STER BLKHD LED 4K BLK G2	Black	4,000	350 / 750	9 / 17	759 / 1,477	84 / 87	50,000
4063836	STER BLKHD LED 4K BLK EM G2	Black	4,000	350 / 750	11 / 19	759 / 1,477	69 / 78	50,000
4063837	STER BLKHD LED 4K SIL G2	Silver	4,000	350 / 750	9 / 17	759 / 1,477	84 / 87	50,000
4063838	STER BLKHD LED 4K SIL EM G2	Silver	4,000	350 / 750	11 / 19	759 / 1,477	69 / 78	50,000
<b>Sterling Bulkhead LED G2 3000K</b>								
4063831	STER BLKHD LED 3K BLK G2	Black	3,000	350 / 750	9 / 17	684 / 1,325	76 / 78	50,000
4063832	STER BLKHD LED 3K BLK EM G2	Black	3,000	350 / 750	11 / 19	684 / 1,325	62 / 70	50,000
4063833	STER BLKHD LED 3K SIL G2	Silver	3,000	350 / 750	9 / 17	684 / 1,325	76 / 78	50,000
4063834	STER BLKHD LED 3K SIL EM G2	Silver	3,000	350 / 750	11 / 19	684 / 1,325	62 / 70	50,000

Legend: 3000K = 3K Warm White; 4K = 4,000K Neutral White; BLK = Black; SIL = Silver


Code	Description
<b>Accessories</b>	
4037279	Hood Black
4041005	Hood Silver
4037280	3 Bar Grille Black
4041007	X Bar



### Photometric Data

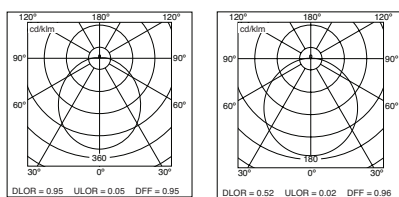

### Dimensions (mm)



[www.feilosylvania.com](http://www.feilosylvania.com)

T: ..... F: .....  
Email: .....

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Ltd.

by **FEILO SYLVANIA**