


Disconnect from mains supply before replacing the fuse or the lamp.
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.
Débrancher le secteur avant de remplacer le fusible ou l'ampoule.
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.
Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.
 Koppla bort spänningen före byte av en säkring eller en lampa.



Switch Off
 Abschalten
Débrancher
 Desconectar
Uitschakelen
 Stäng av

These luminaires are designed for use in interior situations only. 2191 MD, 2191 MS, 2196 CD and 2196 CS may be mounted on combustible surfaces but 2191 ME, 2191 MB, 2196 C and 2196 CE are only suitable for mounting on non-combustible surfaces.

TO INSTALL THE LUMINAIRES PROCEED AS FOLLOWS.

Switch off the mains electrical supply.

2191 Types.

Loosen the three drum retaining screws and separate the drum from the mounting plate.

Use a suitable terminal block to connect the mains supply leads to the corresponding flying leads in accordance with the label attached to them.

Locate the terminal block in the conduit box and fix the mounting plate to the conduit box/mounting surface using suitable screws (not supplied).

Assemble the drum to the mounting plate and tighten the retaining screws.

Fit a lamp as specified by the label in the drum.


2196 Types.

Connect the flying leads, colour coded:- brown - live, blue - neutral and green/yellow - earth, to the corresponding mains supply leads using a suitable terminal block.

Locate the terminal block in the conduit box and fix the cone retaining wire and mounting plate to the conduit box/mounting surface using appropriate screws (not supplied).

Engage the slots of the cone over the wire loops and rotate the cone to secure it.

Fit a lamp as specified by the label in the cone.

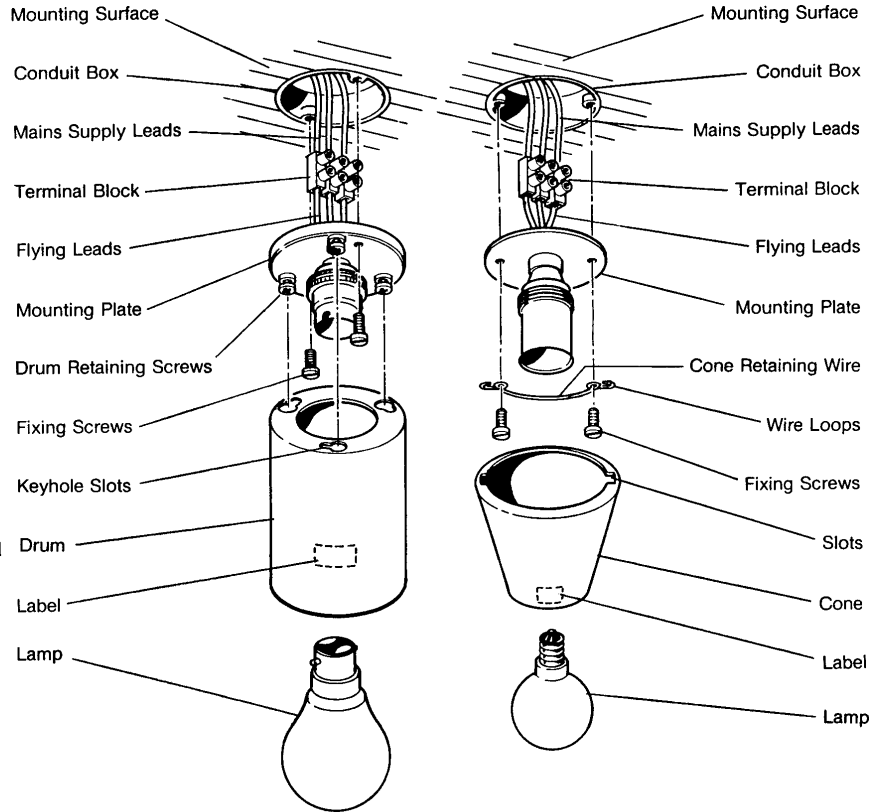

2191 Type

2196 Type



Replace any cracked protective shield.

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

Ce symbol indique que vous devez remplacer tout verre de protection fêlé.

Este simbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.

Dette symbolet indikerer at alle odelagte (sprukne) sikkerhetglass må skiftes.

Valaisinta el saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

Suitable for use indoors
 Geeignet für Innenanwendung
Pour un usage interne
 Adecuada para uso en interiores
Geschikt voor gebruik binnen
 Lämpelig för inomhusbruk



This Electrical Product
MUST be recycled.



< Millimetres >