



4041796 4041797 4048427 4050919 4051600  
4051601 4051602 4051603 4148426

**Disconnect from mains supply before replacing the fuse or the lamp.**  
**Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.**  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
**Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.**  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
**Koppla bort spänningen före byte av en säkring eller en lampa.**



**Switch Off**  
**Abschalten**  
**Débrancher**  
**Desconectar**  
**Uitschakelen**  
**Stäng av**

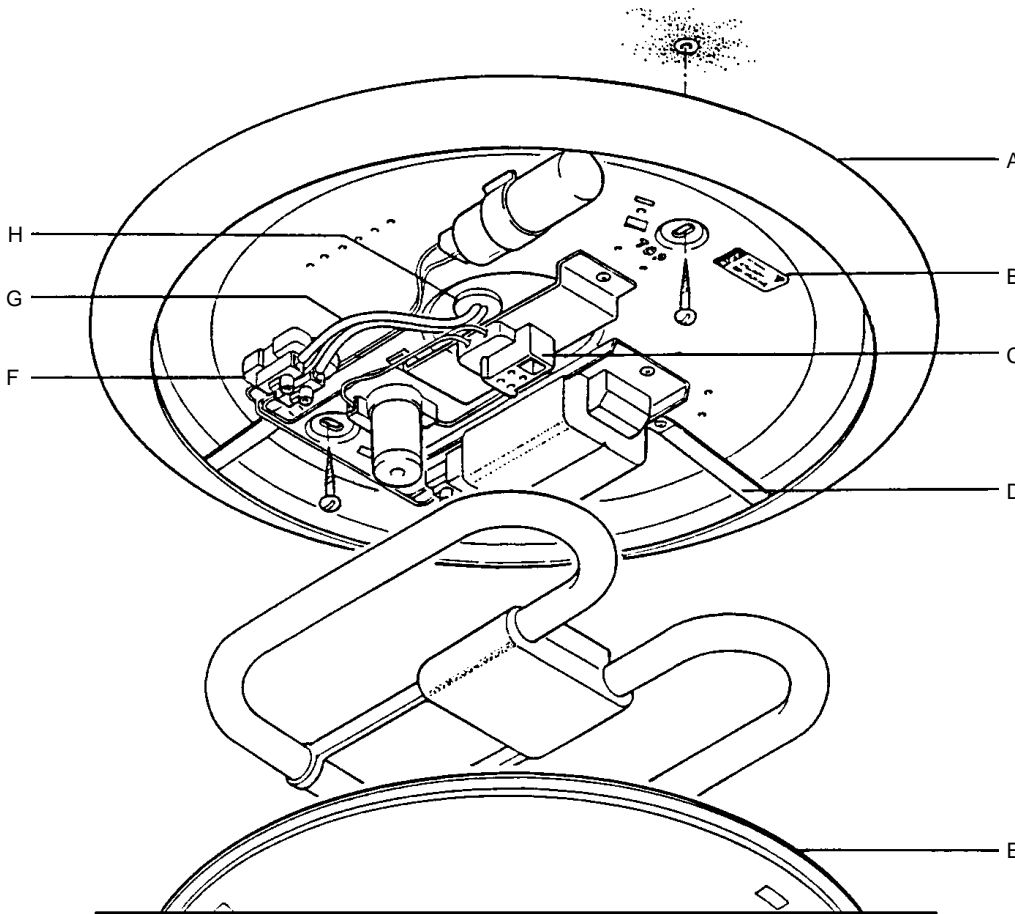

This luminaire is suitable for interior ceiling or wall mounting to a 50.8mm conduit box, or directly to mounting surface.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Switch off the mains electrical supply before commencing installation.

**Installation Procedure**

Carefully lever out diffuser (E).

Check rating marked on label (B) conforms with mains electrical supply.

Partially screw suitable M4 screws in conduit box or alternatively prepare suitable fixings in mounting surface at 192mm centres for outrigger fixing.  
 NOTE: For wall mounted applications gallery (A) is marked "TOP".

Fit grommets (H) supplied in gallery. Pass mains supply cable through grommet (H).

Secure gallery (A) to conduit box or to mounting surface using suitable fixing screws.

Cover mains supply leads with silicone sleeving (G) supplied and connect to their respective terminals in the terminal block (F).

Fit appropriate lamp as indicated on label (B) by pushing it firmly in lampholder (C).

Ease diffuser (E) into gallery rim ensuring it is held concentrically by the three retaining clips (D).

**WARNING:**  
 This Luminaire must be earthed.

**WARNING:**  
 Do not insulation test.


**NOTE:**  
 This luminaire should be cleaned by using warm soapy water and a soft cloth - ensure luminaire is switched off during cleaning.

Dispose of lamps in accordance with lamp manufacturers instructions,



**Removing Diffuser**

1. Press down 2. Push to side 3. Lever out

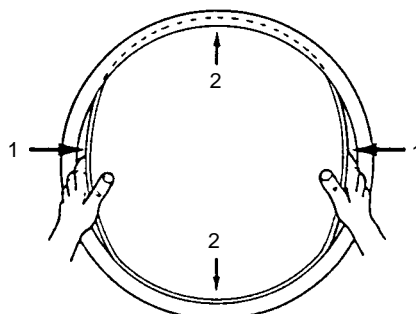

**Fitting Diffuser**

1. Flex in 2. Insert under rim 3. Centralise

Suitable for use indoors

Geeignet für Innenanwendung

Pour un usage interne

Adecuada para uso en interiores

Geschikt voor gebruik binnen

Lämplig för inomhusbruk



**Replace any cracked protective shield.**

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

**Ce symbole indique que vous devez remplacer tout verre de protection fêlé.**

Este simbolo indica que hay que reemplazar filtros en caso de rotura o desperfectos.



**Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetsglass må skiftes.**

Valaisinta el saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product  
 MUST be recycled.



03.08