



4048403 4148425 4048424 4048419 4041793  
 4041795 4048415 4048416 4050920 4050921  
 4051594 4051596 4051598 4051599 4146837  
 4148406 4148407 4148408 4148420 4148421  
 4163076 4163145 4163582 4164412 4164521  
 4164691 4165410 4165496

**Disconnect from mains supply before replacing the fuse or the lamp.**  
 Vor dem Einsetzen der Sicherung oder der Lampe Spannungsfreiheit herstellen.  
**Débrancher le secteur avant de remplacer le fusible ou l'ampoule.**  
 Desconectar del suministro de la red, antes de realizar la sustitución del fusible o de la lámpara.  
**Voor het vervangen van lamp of zekering, eerst netspanning uitschakelen.**  
 Koppla bort spänningen före byte av en säkring eller en lampa.



**Switch Off**  
 Abschalten  
**Débrancher**  
 Desconectar  
**Uitschakelen**  
 Stäng av

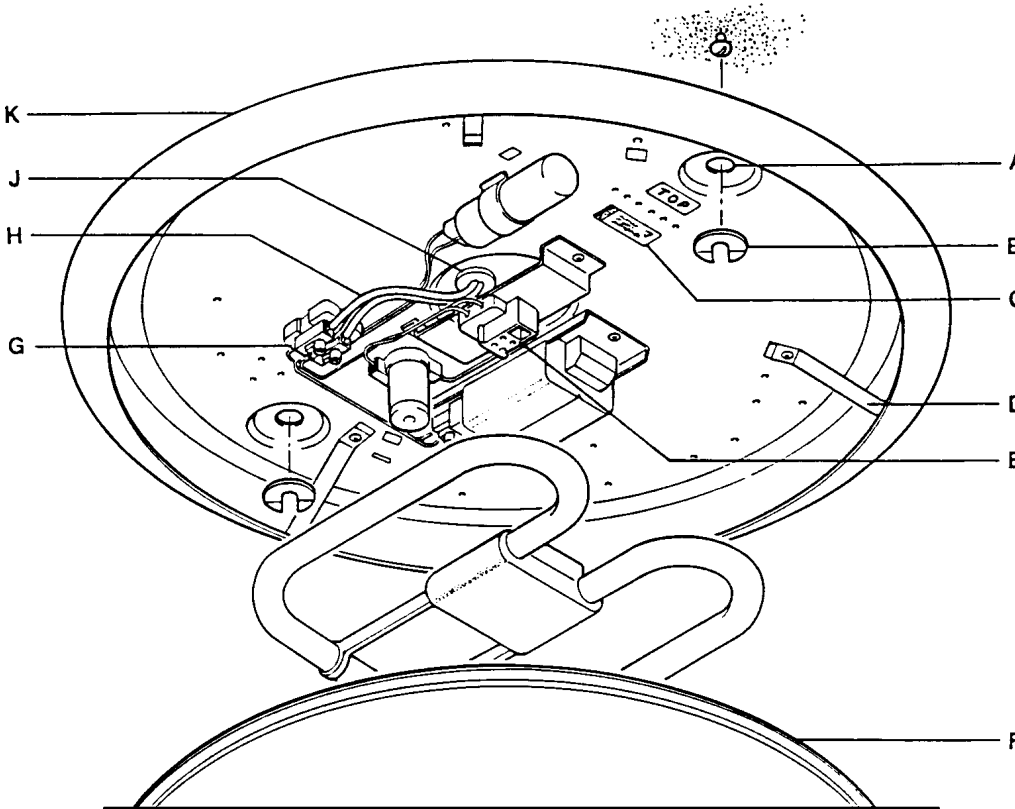

This luminaire is suitable for ceiling or wall mounting in interior situations.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

**A** Switch off mains electrical supply before installation.

**Installation Procedure**

**B** Carefully lever out diffuser (F).

**C** Check rating marked on label conforms with mains electrical supply.

Partially screw suitable round headed screws into mounting surface at 310mm centres. NOTE: Housing (K) is marked 'TOP' for wall mounting.

**E** Fit supplied grommets (J) in gallery.

Pass mains supply cables through grommets (J).

Locate gallery mounting holes (A) over fixing screw heads, insert supplied slip washers (B) under screw heads and tighten screws.

Cover mains supply cable with supplied silicone sleeving (H) and connect to their respective terminals in terminal block (G).

Fit appropriate lamp as indicated on label (C) by pushing firmly into lampholder (E).

Ease diffuser (F) into gallery rim ensuring it is held concentrically by the three retaining clips (D).

WARNING: This luminaire must be earthed.

WARNING: Do not insulation test.


NOTE: This luminaire should be cleaned using warm soapy water and a soft cloth. Ensure luminaire is switched off during cleaning.

Dispose of lamps in accordance with lamp manufacturer's instructions.



**Removing Diffuser**

1. Press down. 2. Push to one side. 3. Lever out.

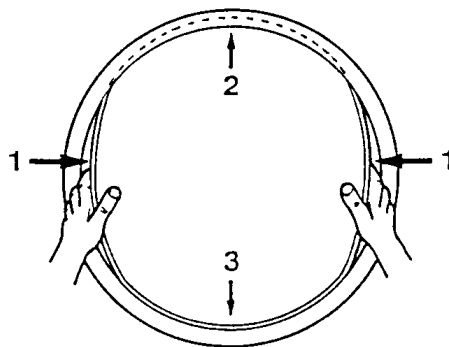

**Fitting Diffuser**

1. Flex in. 2. Insert under rim. 3. Centralise.

**Suitable for use indoors**  
 Geeignet für Innenanwendung  
**Pour un usage interne**  
 Adecuada para uso en interiores  
**Geschikt voor gebruik binnen**  
 Lämplig för inomhusbruk



**Replace any cracked protective shield.**

Dieses symbol bedeutet, dass defekte Schutzgläser sofort ersetzt werden müssen.

**Ce symbole indique que vous devez remplacer tout verre de protection fêlé.**

Este símbolo indica que hay que reemplazar los filtros en caso de rotura o desperfectos.

**Dette symbolet indikerer at alle ødelagte (sprukne) sikkerhetsglass må skiftes.**

Valaisinta ei saa käyttää ilman suojalasia vioitunut suojalasi on vaihdettava uuteen ennen valaisimen käyttöön ottoa.

< Millimetres >



This Electrical Product **MUST** be recycled.



03.08