


SYLVANIA

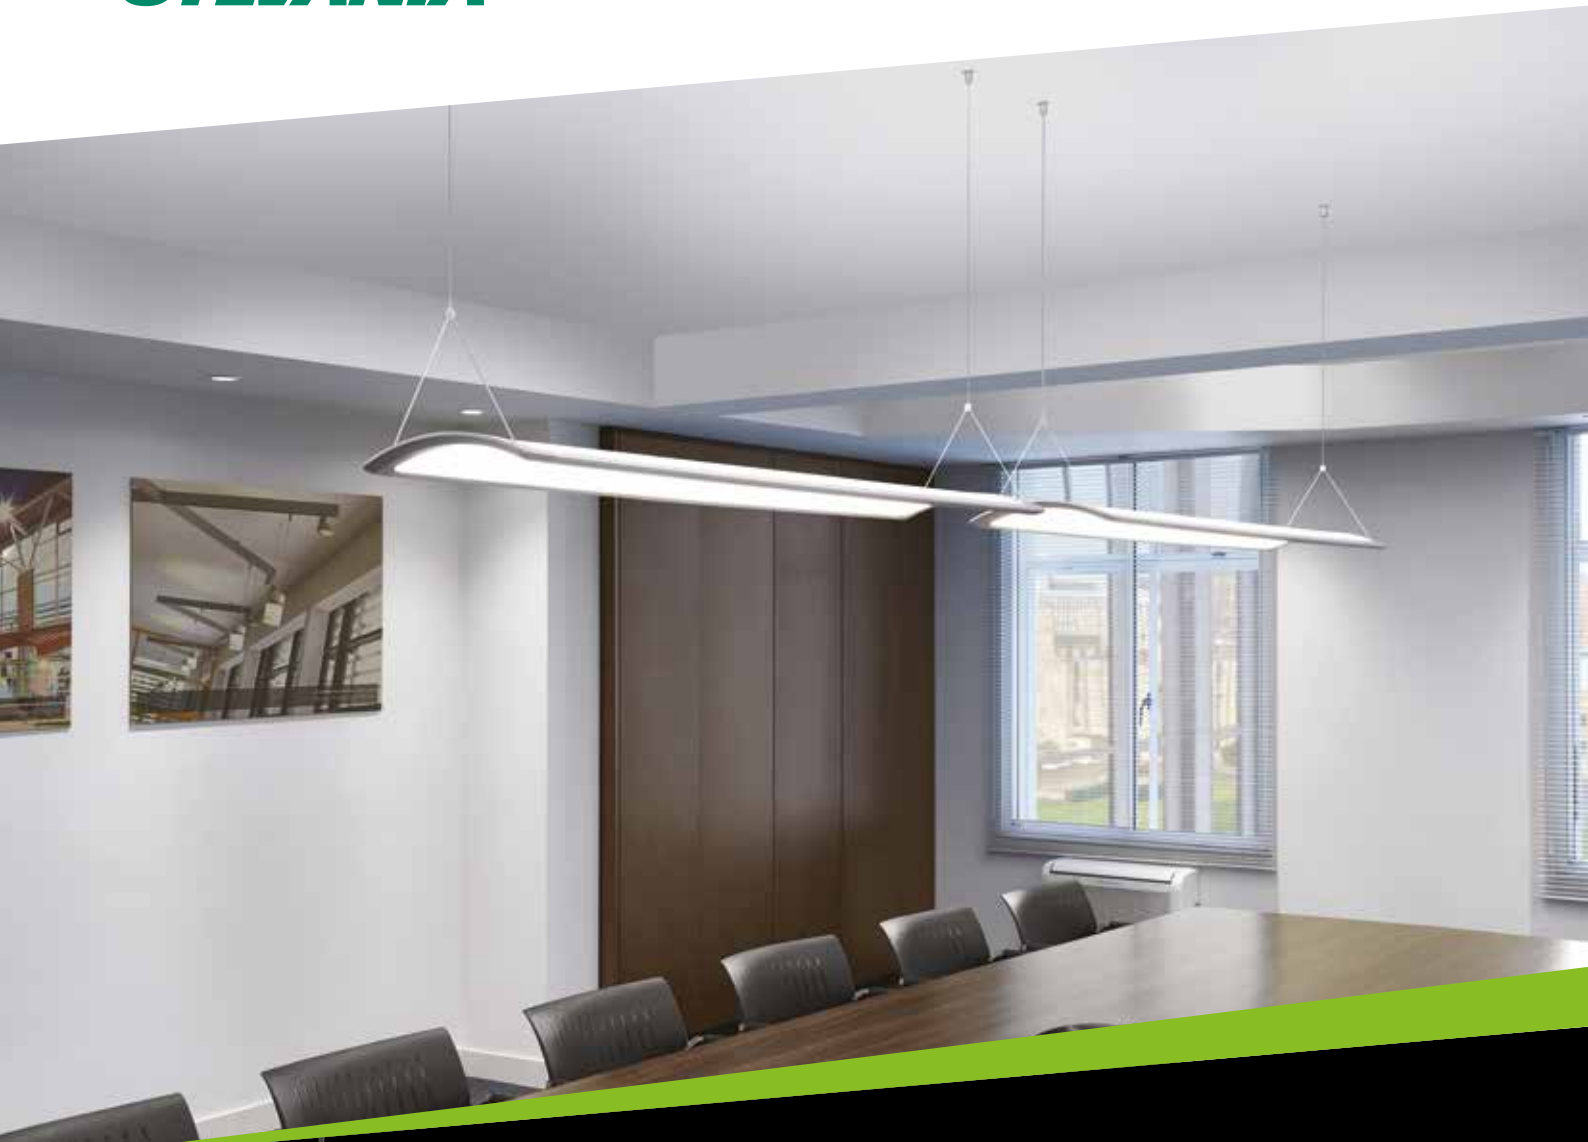

One look and you'll be hooked

Concord Curvelyte

Concord Curvelyte exemplifies a high level detail aesthetic which appeals to designers within the built environment seeking a minimalist design. With its curved lines for a clean, sharp and sleek architectural look Curvelyte is unique.

Not just a pretty face, Curvelyte is also energy efficient and innovative too!

Featuring an LED light guide with a double row of LEDs, Curvelyte places light 70% down and 30% up for a more productive work environment.

Please visit our website for more information or speak to one of our highly knowledgeable engineers.

feilosylvania.com

Features

- Unique curved lighting shape perfect for offices, schools and conference rooms
- Direct - Indirect (70/30) lighting for ambient illumination
- UGR 19 versions for visual comfort
- Uniform light for aesthetics
- Powered through suspension cable for easy installation and low visual impact
- Surface mount accessories are available in different colours and shapes to enhance ceiling appearance
- Highly efficient - up to 131 lumens / Watt
- L90B10 @ 50,000 hours., Long service life with lumen maintenance of 90% at 50,000 hours
- Driver lifetime: 50,000 hours with max 10% failure
- Low LED flicker <5%
- Color Rendering Index (Ra)>80 for office applications
- LED Color consistency between luminaries <3 SDCM
- DALI (Switch-dim) dimmable

Product information

Code	Description	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Colour Temp (K)	Control Technology	UGR
Curvelyte							
Black							
2093175	Curvelyte 1265 HO D/I 3K DALI Black	55	6250	114	3000	DALI	22
2093176	Curvelyte 1265 HO D/I 4K DALI Black	55	6750	123	4000	DALI	22
2093186	Curvelyte 1265 HO LG D/I 3K DALI Black	55	5000	91	3000	DALI	19
2093187	Curvelyte 1265 HO LG D/I 4K DALI Black	55	5450	99	4000	DALI	19
White							
2093180	Curvelyte 1265 HO D/I 3K DALI White	55	6600	120	3000	DALI	23
2093181	Curvelyte 1265 HO D/I 4K DALI White	55	7200	131	4000	DALI	23
2093188	Curvelyte 1265 HO LG D/I 3K DALI White	55	5300	96	3000	DALI	19
2093189	Curvelyte 1265 HO LG D/I 4K DALI White	55	5800	105	4000	DALI	19


Legend: 1265 = 1265 mm; HO = High Output; LG = Low Glare (UGR=19); D/I = Direct / Indirect Lighting 70/30%; 3K = Warm White 3000K; 4K = Neutral White 4000K

Accessories


Code	Description	Body Colour
2093177	Curvelyte box 1 cylin 1 rectan sm Black	Black
2093169	Curvelyte box 1 cylin 1 rectan sm White	White
2093168	Curvelyte box 1 cylin 1 rectan sm Silver	Silver
2093178	Curvelyte box 2 rectan sm Black	Black
2093171	Curvelyte box 2 rectan sm White	White
2093170	Curvelyte box 2 rectan sm Silver	Silver



Photometric Data

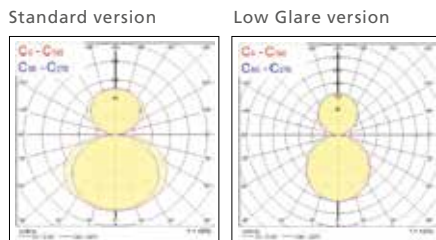

Dimensions (mm)

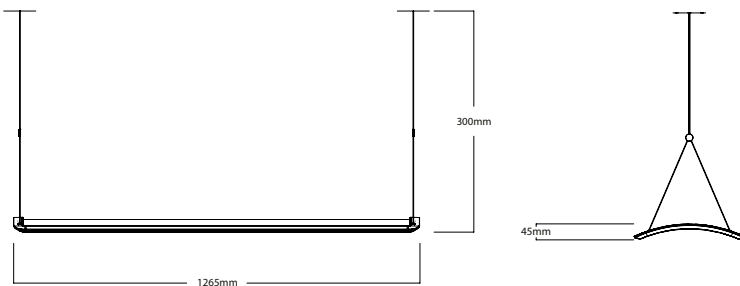

Additional Images

