



## LED PIPE

Seamless linkable LED linear light



The new **LED PIPE** range of luminaires has been designed for simple linear light applications, creating direct or indirect illumination within a room. The design of the luminaire allows seamless linking up to 10m.

With a higher efficiency, the new **LED Pipe** range provides up to 125 lum/w (High Output option).

Each **LED PIPE** product comes with fixings including optional tilting

mounting brackets. A range of accessories are available separately; connector cables for linking around corners and 1m plugged cable.

Top Entry product options mean the power cables can be hidden for a neater installation.

The **LED Pipe** range is ideal for direct lighting in kitchens, on the wall or ceiling, with switch included.

## LED PIPE


### Seamless linkable LED linear light

#### FEATURES

- **NEW:** improved efficiency
- LED Pipe (T5 batten equivalent) ideal for under cabinet, cove and secondary illumination
- Available in 300 / 600 / 900 / 1,200 / 1,500mm versions
- Uniform light distribution
- Highly efficient: delivers up to 125lm/w (total system efficiency)
- Warm white (3,000K) or neutral white (4,000K)
- Driver integrated, direct input 220-240V
- High quality robust PC extrusion tube
- Seamless linking - up to 10m
- Easy installation by mounting brackets (2 non-tiltable + 2 tiltable included)
- Energy class: A++, A+, A
- Low maintenance with 30,000 hours LED life expectancy
- LED technology provides energy efficient solution and reduced maintenance costs
- 150° beam angle



Seamless Linking




Item Code	Description	Body Colour	Colour Temperature (K)	Voltage (V)	Power Consumption (W)	Luminous Flux (lm)	Efficacy (lm/W)	Lifetime (h)
<b>STANDARD</b>								
0051026	LED PIPE G2 L300 WW	White	3,000	220-240	4	360	90	30,000
0051027	LED PIPE G2 L600 WW	White	3,000	220-240	7	630	90	30,000
0051028	LED PIPE G2 L900 WW	White	3,000	220-240	10	900	90	30,000
0051029	LED PIPE G2 L1200 WW	White	3,000	220-240	13	1200	92	30,000
0051030	LED PIPE G2 L1500 WW	White	3,000	220-240	16	1450	91	30,000
0051031	LED PIPE G2 L300 NW	White	4,000	220-240	4	400	100	30,000
0051032	LED PIPE G2 L600 NW	White	4,000	220-240	7	700	100	30,000
0051033	LED PIPE G2 L900 NW	White	4,000	220-240	10	1000	100	30,000
0051034	LED PIPE G2 L1200 NW	White	4,000	220-240	13	1300	100	30,000
0051040	LED PIPE G2 L1500 NW	White	4,000	220-240	16	1600	100	30,000
<b>HIGH OUTPUT</b>								
0051041	LED PIPE G2 L300 HIGH OUTPUT WW	White	3,000	220-240	5	507	101	30,000
0051042	LED PIPE G2 L600 HIGH OUTPUT WW	White	3,000	220-240	9	900	100	30,000
0051043	LED PIPE G2 L900 HIGH OUTPUT WW	White	3,000	220-240	13	1300	101	30,000
0051044	LED PIPE G2 L1200 HIGH OUTPUT WW	White	3,000	220-240	16	1700	106	30,000
0051045	LED PIPE G2 L1500 HIGH OUTPUT WW	White	3,000	220-240	21	2250	110	30,000
0051046	LED PIPE G2 L300 HIGH OUTPUT NW	White	4,000	220-240	5	600	120	30,000
0051047	LED PIPE G2 L600 HIGH OUTPUT NW	White	4,000	220-240	9	1050	116	30,000
0051048	LED PIPE G2 L900 HIGH OUTPUT NW	White	4,000	220-240	13	1500	115	30,000
0051049	LED PIPE G2 L1200 HIGH OUTPUT NW	White	4,000	220-240	16	2000	125	30,000
0051050	LED PIPE G2 L1500 HIGH OUTPUT NW	White	4,000	220-240	21	2500	120	30,000
<b>TOP ENTRY HIGH OUTPUT</b>								
0051052	LED PIPE G2 L1200 TOP ENTRY HO WW	White	3,000	220-240	16	1700	106	30,000
0051056	LED PIPE G2 L1200 TOP ENTRY HO NW	White	4,000	220-240	16	2000	125	30,000
<b>ACCESSORIES</b>								
0051058	LED PIPE G2 CONNECTING CABLE 3 PACK	White						
0051059	LED PIPE G2 UK CABLE ACC	White						
0051060	LED PIPE G2 EUROPE CABLE ACC	White						

## LED PIPE


### Seamless linkable LED linear light

### Photometric data


LED PIPE L300




LED PIPE L600




LED PIPE L900



LED PIPE L1200



LED PIPE L1500




### Dimensions (mm)

Side Entry				Top Entry			
Type	Length	Width	Height	Type	Length	Width	Height
L300	300mm	24mm	35mm	L1200	1200mm	24mm	44mm
L600	600mm	24mm	35mm				
L900	900mm	24mm	35mm				
L1200	1200mm	24mm	35mm				
L1500	1500mm	24mm	35mm				


LED Pipe L300 - Side Entry




LED Pipe L600 - Side Entry

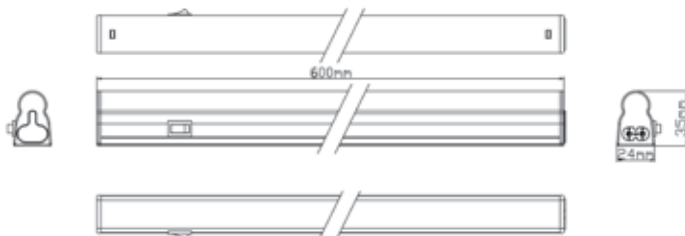


LED Pipe L900 - Side Entry

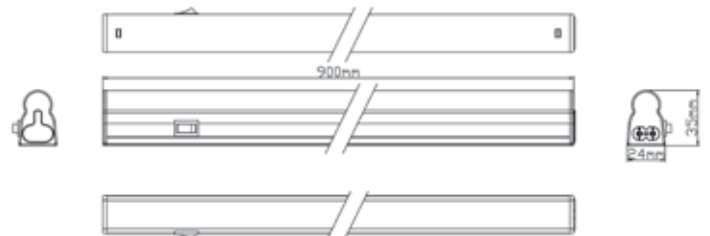


LED Pipe L1200 - Side Entry

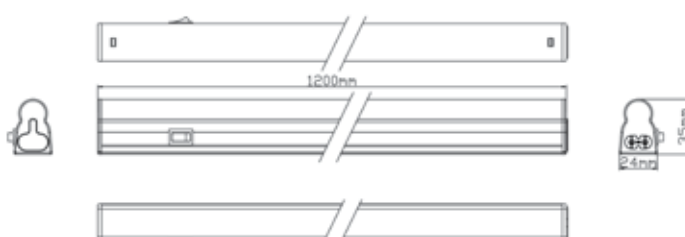

LED Pipe L1200 - Top Entry

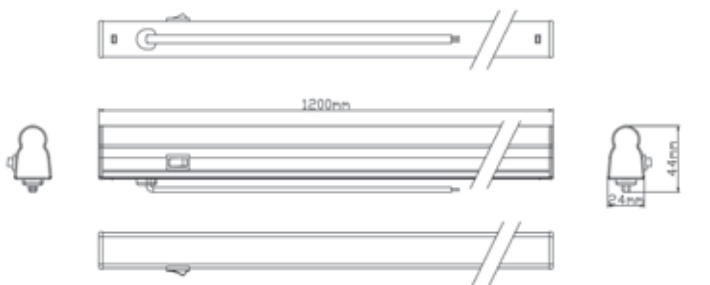

LED Pipe L1500 - Side Entry

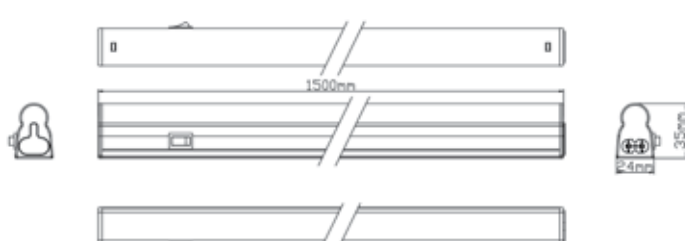

## LED PIPE Seamless linkable LED linear light



[www.feilosylvania.com](http://www.feilosylvania.com)

T: ..... F: .....  
Email: .....

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited

by **FEILO SYLVANIA**