



Good performance, no fuss



START eco Downlight Flat - Non Dimmable

The START eco Downlight Flat - Non Dimmable family provides the perfect integrated LED solution for the replacement of traditional CFL downlights. The range is available in both round and square bodies and in recessed and surface mounted versions providing flexibility for different installation areas.

START eco Downlight Flat - Non Dimmable



Features

- Available in 12W, 14W, 15W & 22W, recessed or surface mounted
- Ideal for applications such as corridors, back of house and any location that requires long service hours and high switching
- Available in round or square form factor with integrated, non dimmable driver.
- Edge lit LED design and opal diffuser provides uniform light distribution
- Choice of 3000K (warm white) or 4000K (neutral white)
- Cost effective product - will help you comply with Building regulations - up to 100lm/W (Round 2000lm 4000K version)
- Slim design:
 - Recessed depth as low as <27mm
 - Surfaced mounted height of 40mm
- Energy Class: A++



START eco Downlight Flat recessed round



START eco Downlight Flat recessed square

Product information


Code	Description	Cut Out (mm)	Colour Temperature (K)	Power Consumption (W)	Luminous Flux (lm)	Efficacy (lm/w)	Lifetime (h)	CFL Replacement
START eco Downlight Flat recessed non dimmable round								
12W								
0053875	START eco Downlight Flat 150 900lm 830	Ø150	3000	12	900	75	30,000	1x26W
0053879	START eco Downlight Flat 150 1000lm 840	Ø150	4000	12	1000	83	30,000	1x26W
15W								
0053876	START eco Downlight Flat 200 1260lm 830	Ø200	3000	15	1260	84	30,000	1x32 / 2x18W
0053880	START eco Downlight Flat 200 1400lm 840	Ø200	4000	15	1400	93	30,000	1x32 / 2x18W
22W								
0053878	START eco Downlight Flat 200 1800lm 830	Ø200	3000	22	1800	82	30,000	1 x 42W
0053882	START eco Downlight Flat 200 2000lm 840	Ø200	4000	22	2000	91	30,000	1 x 42W
START eco Downlight Flat recessed non dimmable square								
14W								
0053877	START eco Downlight Flat 200 Square 1260lm 830	Ø200 x 190	3000	14	1260	90	30,000	1x32 / 2x18W
0053881	START eco Downlight Flat 200 Square 1400lm 840	Ø200 x 190	4000	14	1400	100	30,000	1x32 / 2x18W
START eco Downlight Flat surface mounted non dimmable round								
12W								
0053883	START eco Downlight Flat 165 900lm 830 Surface	Surface Mounted	3000	12	900	75	30,000	1x26W
0053887	START eco Downlight Flat 165 1000lm 840 Surface	Surface Mounted	4000	12	1000	83	30,000	1x26W
15W								
0053884	START eco Downlight Flat 220 1260lm 830 Surface	Surface Mounted	3000	15	1260	84	30,000	1x32 / 2x18W
0053888	START eco Downlight Flat 220 1400lm 840 Surface	Surface Mounted	4000	15	1400	93	30,000	1x32 / 2x18W
22W								
0053886	START eco Downlight Flat 220 1800lm 830 Surface	Surface Mounted	3000	22	1800	82	30,000	1x42W
0053890	START eco Downlight Flat 220 2000lm 840 Surface	Surface Mounted	4000	22	2000	91	30,000	1x42W
START eco Downlight Flat surface mounted non dimmable square								
14W								
0053885	START eco Downlight Flat 220 Square 1260 lm 830 Surface	Surface Mounted	3000	14	1260	90	30,000	1x32 / 2x18W
0053889	START eco Downlight Flat 220 Square 1400lm 840 Surface	Surface Mounted	4000	14	1400	100	30,000	1x32 / 2x18W

START eco Downlight Flat - Non Dimmable




Dimensions (mm)


START eco Downlight Flat recessed non dimmable

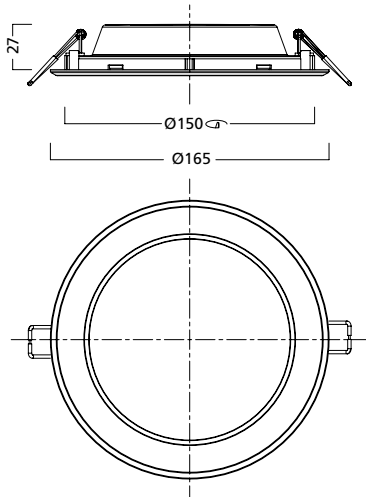

START eco Downlight Flat 900 / 1000 round

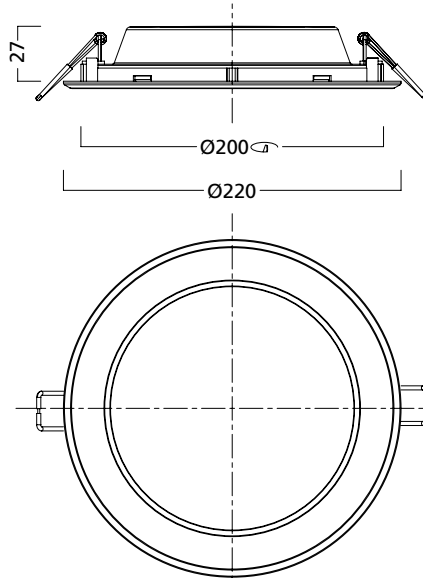


START eco Downlight Flat 1260 / 1400 / 1800 / 2000 round

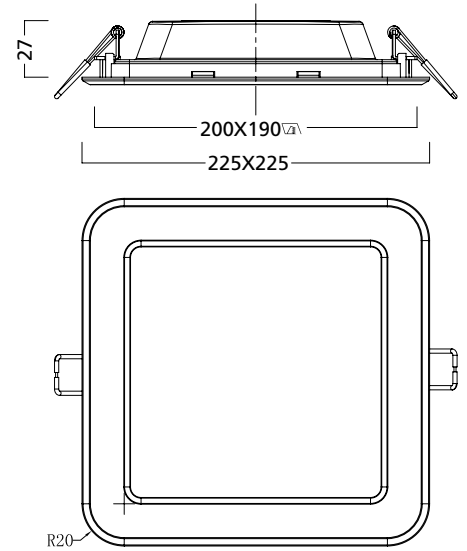


START eco Downlight Flat 1260 / 1400 square


START eco Downlight Flat surface mounted non dimmable

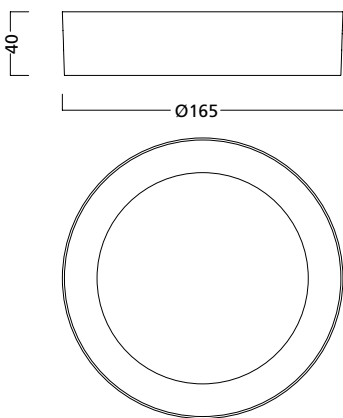

START eco Downlight Flat 900 / 1000 round

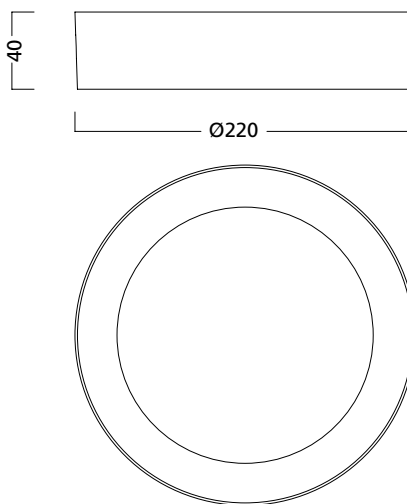

START eco Downlight Flat 1260 / 1400 / 1800 / 2000 round

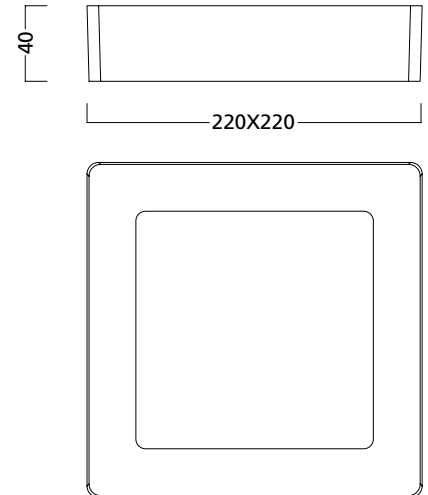

START eco Downlight Flat 1260 / 1400 square


START eco Downlight Flat - Non Dimmable




Photometric data




START eco Downlight Flat non dimmable 1,000 round 4,000K




START eco Downlight Flat non dimmable 1,400 round 4,000K



START eco Downlight Flat non dimmable 2,000 round 4,000K



START eco Downlight Flat non dimmable 1,400 square 4,000K



Additional Images

START eco Downlight Flat recessed non dimmable round



START eco Downlight Flat recessed non dimmable square



START eco Downlight Flat surface mounted non dimmable round



START eco Downlight Flat surface mounted non dimmable square

